

User Manual






Table of Contents

The Artlantis Family.	1
Artlantis Render - Radiosity for fixed images.	1
Artlantis Studio - Animation for everyone.	1
Artlantis Media	1
Artlantis 4 New Features	2
General Points.	2
Viewpoint Inspectors.	2
Materials	2
Heliodons.	2
Objects.	2
Panoramas (Studio only).	2
Rendering	2
Opening Old Artlantis Files.	3
Opening Artlantis 2 files.	3
Opening Artlantis 1.2 files.	3
Texture Definition Controller.	3
Modifying the Material Definition.	3
System Requirements.	3
Minimum System Requirements.	3
Recommended System Configuration.	4
Installation	4
Serialization	5
Activating and Evaluating Artlantis.	5
License Activation for Windows.	5
By Internet.	5
Potential Problem	6
Manual	<i>6</i>
Deactivating the License.	7
Manual	7
Evaluation Period.	8
Installing and activating network licenses.	9
Purpose:	9
Requirement:	9
Installation:	9
Step 1 - Activate the network license on the server.	9
Validation by Internet:	10
Validating manually:	10
Step 2: Install Artlantis on the client workstations.	11
Potential Problems.	11
Opening 3DS Files	13
Opening an Artlantis File.	13
Double clicking on an ATL or AOF file.	13
Opening a File when the Application Launches.	14
Open Recent	14
Open	14
Convert lamp power:	14

The neon Shaders are not activated, so they will not take part in the lighting of the	
scene: Replace current background with natural sun and sky:	
Activate infinite ground:	
Quit	
Drag/Drop a file to the Artlantis icon.	
Opening DWG/DXF Files.	
Opening DWF Files.	
Opening OBJ Files.	
Opening FBX Files.	
Using Reference Files.	
File Menu > Use Reference File	
Example of Updating Geometry*:	
Steps:	
Saving a Document	
Saving an ATL Document	
Saving an AOF Document	
Saving a DWF Document	
Saving an OBJ Document	
Saving an SKP Document	
Saving an Archive	
Artlantis Interface	
Navigation Inspector	24
The following nine inspectors are available:	
The Artlantis Menus.	25
File Menu	25
Open	25
Merge Geometry from File	25
Save	25
Save As	26
Reverts to the saved version.	26
Export as Object	26
Export as Archive	26
Use reference file	26
Edit Menu.	26
Undo.	26
Redo.	26
Cut	
Сору.	26
Paste	26
Delete	26
Preferences.	
Display Menu.	
Enlarge/Reduce.	
Fit to Window.	
Back to Original View.	
Zoom	
Pan	
Change 2D View	
2D View Display.	27
K907):/

	Next	21
	Hide Toolbar	. 28
	Status Bar	28
	Toolbars.	28
Ins	pector Menu.	28
	Perspectives.	28
	Parallel Views.	28
	Panoramas.	. 28
	VR Objects.	28
	Animations.	28
	Shaders.	28
	Lights.	. 28
	Heliodons.	28
	Objects.	28
	Render.	. 28
	Partial render.	28
	Batch Rendering	
Wi	ndow Menu	29
	Inspector	29
	2D View.	29
	Catalog	29
	Timeline.	
	Rendering Parameters	
	Scene information:	
Too	ols Menu	
	Create Shader	
	Create a Postcard™	
Hel	p Menu.	
	Artlantis Help.	
	Artlantis Web Site.	
	Tutorials.	
	Online registration	
	Edit License	
	About Artlantis.	29
	D View Window.	
	ting in 2D View.	
	ed Images.	
	imations.	
	View Display and Navigation Tools.	
	Default Tools Available.	
	stomizing the 2D View Toolbar.	
	ting in 2D View.	
	Working with Perspectives in 2D View	
	Working with Objects in 2D View.	
	Working with Lights in 2D View	
	-	
	Working with the Clipping Box in 2D View	
	Working with VR Objects in 2D View	
	Working with Panoramas in 2D View	
1	MULKING WICH CAMETA AMMIAUUH III 4D MEW	- 32

2D View Window.	52
Editing Paths.	52
Create Path.	54
Move Path.	54
Editing the Path.	54
Add a Control Point	54
To edit a portion of the tangent at a point.	
To delete the inflection point	56
Extend Path	56
Path Edit Pop-up Menu.	57
Editing Keyframes.	
Keyframe Edit Pop-up Menu:	
Add a keyframe.	
The 2D View Edit Filters Pop-up Menu:	
Viewpoint Edit Pop-up Menu:	
Working with Light Animation in 2D View.	
2D View Window:	
Editing Paths.	
Create Path.	
Move Path.	
Editing the Path.	
Add a Control Point	
To edit a portion of the tangent at a point:	
To delete the inflection point.	
Extend Path	
Path Edit Pop-up Menu.	
Editing Keyframes.	
Keyframe Edit Pop-up Menu:	
Adding a key image	
Keyframe Edit Pop-up Menu:	
Working with Object Animations in 2D View.	
2D View Window. Editing Paths.	
Create Path.	
Move Path.	
Editing the Path.	
Add a Control Point	
To edit a portion of the tangent at a point:	
To delete the inflection point:	
Extend Path.	
Path Edit Pop-up Menu	
Editing Keyframes	
Keyframe Edit Pop-up Menu:	
Add a keyframe	
The 2D View Edit Filters Pop-up Menu:	
Editing the Clipping Box	
In 2D View.	
Preview Representation.	
The Preview Window.	
Preview Display and Navigation Tools.	
Crouned by tonic	75

Navigation tools:	75
Artlantis tools:	75
Viewpoint selector:	76
Show/Hide Tool Group in the toolbar.	76
Customizing the Toolbar	76
SpaceNavigator Peripheral Compatibility:	76
Customizing the Preview Toolbar.	76
From Display menu > Toolbars > Customize	76
The Timeline Window.	77
Introduction:	77
Display.	77
Animating	77
The Timeline window is divided into the following four areas:	78
Keyframes and Guides.	81
Keyframes.	81
Current animated elements at an instant T: Cameras, lights, heliodons, objects and animat textures.	
Animated setting for current element:	
How Keys are Represented.	
General Information:	
Selecting keys of an animated element.	
Selecting keys of the current animated element.	
Creating keys.	
Cursor pop-up menu:	
Keyboard Shortcuts.	
Guides:	
The Perspectives Inspector	
The Perspectives List	
List drop-down menu.	
Foreground Images.	
Defining a Foreground	
Loading Foreground Images.	89
Background Images	90
In the local Viewpoints menu:	90
Loading a Background Image:	
Deleting a Background Image.	
The Parallel Views Inspector.	93
The Parallel Views List	94
List drop-down menu	94
The Media Catalog	97
The Media Catalog window is divided into three areas: Favorites, Thumbnails and Preview	
Catalog Manager.	
Favorites area	
Navigating Media Types.	
Adding a Catalog	
Updating Catalogs.	
Removing a Catalog	
Filtering Catalog Media Display.	
Editing the Size of Catalog Thumbnails.	
Dressing the Scene with Media	99

Dragging and Dropping a Media from the Catalog to the Preview Window	99
Postcards.	100
Saving a Postcard.	100
Using a Postcard.	100
Sending a Postcard	100
Deleting a Postcard	
Using Postcards.	
The Shaders Inspector.	
Creating a Shader	
Create Shader and Shader Interface Match:	
Materials List	
Toolbar:	
List Organization.	
Realistic Water Shader.	
The Neon Light Shader	
Materials List: displays the materials of the scene.	
The Basic Shader.	
Expert Shader.	
Materials List: displays the materials of the scene.	
Transparent Fresnel Shader.	
Diffuse Fresnel Shader.	
Materials List: displays the materials of the scene.	
Shaders: Procedural, Mirror, Transparent, Marble, Lines.	
Luminous Glazing Shader.	
Realistic Glazing Shader	
Editing Textures.	
Materials List	
Applying a texture is done either by:	
Deleting a texture is done either by:	
Texture Mapping	
Reaffect a Material	
The Materials and Textures Pop-up Menus.	
Material	
Create Shader From	
Apply to All Instances. Reset to Default	
Add Texture	
Merge materials with Same Name.	
Merge Material with the Same Shader.	
Merge Vertex	
Visible	
Cast Shadow.	
Receive Shadow	
Delete All Unused Material IDs.	
Delete.	
Split Material by Mesh.	
Texture	
The Objects Inspector.	
The Objects Inspector by Hierarchy.	
Geometry	
Object	127

Geometry pop-up menu selected.	
Object geometry.	
Saving a scene:	
The Objects Inspector by Layer.	
Renaming a layer.	
Layers	
Geometry.	
Object by Layer toolbar.	
Create a layer	
Creating an object	
Selected layer popup menu	
Editing the Scene	
Editing Objects.	
In the case of a Standard object:	
Object Animation.	
Creating an Object from a Scene.	
Selecting Polygons.	
Creating the Object.	
Canceling a Selection.	
The Objects List	
Pop-up menu for objects:	
Coordinates of the Perspective View Inspector:	
Multiple selection.	
Billboards.	
Availability:	
Two types of Billboards.	
Light Objects.	
Standard Objects.	
Object Animation.	
Vegetation Objects.	
Animated Character Objects.	
Behavior.	
Shader:	143
Coordinates	
Object Animation.	
Instanced Object	
Instancing an Object	
Delete a Dependency.	
ne Heliodons Inspector.	
Sunlight:	
Light from the sky:	
Clouds:	
Heliodon Animation.	140
City Editor.	14
World Map	
City.	
Longitude and latitude.	
GMT.	
+ 1 in summer.	
The Heliodons List	14

Advanced Heliodon Parameters.	148
Sky:	148
Fog: set fog parameters.	149
Animation settings: used to animate the movement of the wind along with its direction	149
The Lights Inspector.	151
Lights List: for handling lights on the list shown.	151
Lighting.	151
Animations:	152
Lights List	152
Light Group Pop-up Menu:	153
Light Pop-up Menu:	153
Selection and multiple editing of lights:	154
The Site Insertion Tool	155
Opening the Insertion Command.	155
Step 1 - Setting the Axis Markers in the 2D View.	155
Step 2 - Setting the Axis Markers in the Preview Window.	156
Step 3 - Running the Insertion Calculation.	
Post-Process Effect Filters	159
Examples: Post-Process Rendering	160
Tone Settings.	160
Examples: Post-Process Rendering	160
Rendering.	163
Perspective Rendering Parameters	
Expert Mode Viewpoint Rendering Parameters in the "Photorealistic" Engine	
Render.	
Inspector Menu > Render	
Rendering Animations.	
Inspector Menu > Render	
Format:	
Compression Parameters:	
Quality:	
Panorama Rendering	
1- Rendering a Panorama:	
To move from a node to an other one:	
A- Using the thumbnail previews list:	
B- Using the sensitive points displayed into the window	
2- Navigation option:	
To do so:	
Artlantis Batch Render.	
Toolbars.	
The Document List:	
Quit	
Pause	
Resume	
The Batch Rendering Window.	
Inspector Menu > Batch Rendering.	
Toolbars.	
Viewpoints List:	
The Partial Rendering Window.	
Inspector Menu > Partial Render.	
Panarama Randaring	176

1- Rendering a Panorama:	176
To move from a node to an other one:	177
A- Using the thumbnail previews list:	177
B- Using the sensitive points displayed into the window.	177
2- Navigation option:	178
To do so:	178
Parallel View Rendering Settings.	179
Panorama Rendering Parameters	180
VR Object Rendering Parameters.	183
Animation Rendering Parameters.	184
The Panorama Inspector.	187
Panorama List	188
Panorama Pop-up Menu	188
The VR Objects Inspector.	191
VR Object List	192
VR Object Pop-up Menu.	193
The Animations Inspector.	195
General Animation Information	196
Sequence.	196
Animating in a sequence of parameters for other inspectors:	196
Real Time Display:	197
Elements that can be animated.	197
Animations List.	197
Animation Pop-up Menu.	198
Animation Coordinates.	198
Animatable Camera Parameters.	199
What can be animated.	199
What cannot be animated.	200
Animatable Heliodon Parameters.	200
What can be animated.	200
What cannot be animated.	200
Animatable Light Parameters.	201
What can be animated.	
What cannot be animated.	201
Animatable Object Parameters.	201
What can be animated.	201
What cannot be animated.	202
Preferences.	
Preference Settings	
Access: Edit Menu > Preferences.	
General	
Preview.	
Final Renderer	
Mouse and Keyboard Shortcuts.	207
General 2D Shortcuts	208
Actions.	
Combination and Key Strokes.	
2D Shortcuts - Working with Perspectives.	
Actions.	
Combination and Key Strokes.	
2D Shortouts Working with Parallal Views	200

Actions.	209
Combination and Key Strokes.	209
2D Shortcuts - Working with the Clipping Box	209
Actions:	210
2D Shortcuts - Working with Objects.	211
Actions.	211
2D Shortcuts - Working with Lights.	212
Actions.	212
Combination and Key Strokes.	212
2D Shortcuts - Working with Heliodons.	212
Location option:	212
Manual Sun Position option.	213
There is an option for shadows to be projected at 45° depending on the position of the	
viewpoint.	213
2D Shortcuts - Working with Panoramas.	214
Actions.	214
Combination and Key Strokes.	214
2D Shortcuts - Working with VR Objects.	214
Actions.	214
Combination and Key Strokes.	214
2D Shortcuts - Working with Animations.	215
Actions.	215
Combination and Key Strokes.	215
General Preview Display Shortcuts.	215
Actions.	215
Combination and Key Strokes.	215
Activated Object Inspector Preview Shortcuts.	216
Actions.	216
Combination and Key Strokes.	216
General Preview Shortcuts.	217
Actions.	217
Combination and Key Strokes.	217
Example:	218
Perspective Inspector Preview Shortcuts - Site Insertion.	218
Actions.	218
Combination and Key Strokes.	218
Activated Heliodon Inspector Preview Shortcuts.	218
Actions.	218
Combination and Key Strokes.	218
Example of manually moving the sun:	219
Example of positioning the start of fog:	219
Activated Shaders Inspector Preview Shortcuts.	220
Actions.	220
Combination and Key Strokes.	220



User Manual

Legal information

Artlantis™ is a registered trademark of Abvent R&D. PostCard™ is a registered trademark of Abvent R&D.

RayBoosterTM is a registered trademark of HPC SA.

SketchUp® is a registered trademark of Google.

Macintosh®, Mac OS®, QuickTime® are registered trademarks of Apple Inc.

Windows is a registered trademark of the Microsoft Corp.

Photoshop® is a registered trademark of Adobe Systems Incorporated

All other trademarks mentioned are registered by their respective owners.

Acknowledgments

We would like to thank all of our beta testers for their support and feedback while this product was in the preparation phase. They have helped us create a tool tailor-made to their needs.

The Artlantis Family

Artlantis combines the most advanced and effective functions for realistically simulating the material and lighting effects needed for any three-dimensional project. Artlantis Render communicates directly with the leading CAD architecture software (such as ArchiCAD, VectorWorks, SketchUp, AutoCAD, etc.) and can import the main CAD file formats; DXF, DWG, 3DS, DWF, OBJ, FBX SKP.

Artlantis technology is available in two main versions, offering a product line suited to different needs and practices.

Artlantis Render - Radiosity for fixed images

Artlantis Render is a unique and ideal tool for performing very high resolution rendering easily and in real time. The FastRadiosity™ engine lets you calculate radiosity images... with preview in real time. Artlantis Render uses 3D components and 3D vegetation directly in the preview window by simply dragging and dropping them. This enables users to work quickly on the various scenarios and simulate virtual scenes in a real environment.

Artlantis Studio - Animation for everyone

Artlantis Studio is the perfect tool for professionals who design presentations based on fixed images, animation, QuickTime VR panoramas, etc.

Equipped with the new FastRadiosityTM engine, Artlantis Studio offers advanced functions such as scene animation and object animation, to name just a few. Just like with most Artlantis functions, camera pan, viewpoints and aim points are defined easily and intuitively.

Artlantis Media

In addition to the standard library, Abvent offers theme-oriented CD-ROMs that provide a multitude of materials and 3D objects that you can use to produce composite images. These are produced specially for Artlantis by a number of industry partners or independent designers.





This icon indicates functions that are particular to the Artlantis Studio version.

Artlantis 4 New Features

General Points

Artlantis is now a 64 bit program.

Viewpoint Inspectors

Tone Settings post-process with separate treatment for light and dark tones. See "Tone Settings" page 160

Materials

Split a material by Mesh, giving the possibility to apply a different treatment. See "Split Material by Mesh" page

New way to reaffect a Material by creating a new material or using an existing one. See "Reaffect a Material" page 122

Shader creation adding the Fresnel Effect. A new Fresnel transition slider is displayed. See "Create Shader and Shader Interface Match:" page 107

Projection settings new item: <u>Horizontal projection</u>. The Shader is required to be set horizontally. See "Horizontal: the Shader is required to be set horizontally." page 121

New surface Fresnel Shader (diffuse and transparent).

Clearness of the textures.

Material and texture colors: more faithful rendering of colors (grayish veil over).

Heliodons

New physical 3D sky, much deeper with better horizon color gradation.

Objects

Objects Inspector a multiple selection of objects is now possibleSee "Multiple selection" page 137

Gravity can be applied to an object, makes it possible to be set precisely on a surface.

In **2D View object's a single or multiple duplication** of an object follows the topography of the scene, e.g. a tree duplicated along a path on a hill follows the slope of the hill. See "The multiple duplication of objects follows the topology of the geometry. Example: a tree duplicated along a path on a hill will follow the different heights of this hill." page 37

Panoramas (Studio only)

New integrated Multi-nodes panoramas authoring tool.

Multi-nodes management with multiple links.

Flash Player generator for Web publishing (free of use).

Conversion tool to **iVisit 3D**¹ (a multi-node panorama player for iOS).

Rendering

Artlantis Batch Rendering now offers the possibility of editing the document settings before the final rendering. See "Artlantis Batch Render" page 171

Rendering speed is much faster than on Artlantis 3: it is now at least twice as fast and is up to seven times faster when the scene uses Neon Light or Neon Glazing Shaders.

Radiosity enhanced, better energy diffusion, better treatment of transparency, less artefact and better neon lighting diffusion.

¹This is an iOS application for iPad, iPhone or iPodTouch. It is used to view Artlantis panoramas.



Opening Old Artlantis Files

Opening Artlantis 2 files

By default, the files will keep the same appearance as in version 2. The Radiosity rendering settings will be under *Custom* in the drop-down menu. According to the type of view you can redefine an interior or exterior lighting type. You can also define other custom settings - see **Expert Rendering Parameters**.

Opening Artlantis 1.2 files

Scenes produced in Artlantis 1.2 must be converted.

Shaders Inspector

Texture Definition Controller

In Artlantis 3, the software engine automatically computes the level of texture definition.

Modifying the Material Definition

In earlier versions of Artlantis (including version 1.2), material definition was based on an "Extended Phong" model that was perfectly suited to rendering for launching rays, but was not appropriate for radiosity. Artlantis 3.0 interprets material components more realistically. The definition of Shaders is not changed by compatibility concerns with the Shader collection acquired.

Viewpoints Inspector

The old Atmosphere function is no longer supported and more advanced functionalities are available in the Heliodons inspector (simulation of sky and sun, natural fog, cloud editor).

The two-color gradation has been replaced with a new three-color gradation.

Gradation rotation is no longer supported.

Depth of field effects are slightly different.

The hatch engine is no longer available and has been replaced by the **Post-Process Effects**.

Heliodons Inspector

The radiosity contribution check box has been removed. The sun and sky contribute to overall illumination.

Five colors have been deleted for customizing the sky. Artlantis 3 uses a new sky and sun simulation with natural lighting. When files produced in 1.2 are opened, they are converted to this new physical simulation model.

Lights inspector

Artlantis 3 uses a physical light model that is not compatible with the version 1.2 light settings.

The radiosity contribution check box has been removed. The light contributes to overall illumination.

The parallel light has been removed.

The spot and lighting point are merged under lights.

The blurred shadow and transition parameters have been removed and replaced by a variable that is available for all lights.

Catalog

It is no longer necessary to catalog the media folder.

Simply specify your preferred folder.

System Requirements

Minimum System Requirements

- Intel Dual-Core 2.66 GHz or equivalent
- CPU running at 2.66 GHz
- RAM: 4 GB for 32 bit or 8 GB for 64 bit computer.
- System: Windows Vista Home Basic or Vista Home Basic 64 bit
- 256 MB graphics card, OpenGL 1.4 capable.
- Display resolution: 1280 x 1024 million colors
- Internet access



- QuickTimeTM7.7
- 3-button mouse with wheel.
 - ** Graphic chipsets are not supported.

Recommended System Configuration

- Intel Xeon® Intel 6, 8 Core, Core i5 or i7
- Windows Vista or Windows 7 or Windows Vista 64 bit or Windows 7 64 bit
- 1 GB graphics card, OpenGL 1.4 capable.
- Display resolution: 1600x 1200 or greater

Installation

- Be in Administrator session.
- Follow the steps: Users License, Customized Installation, Installation Disk.
- By default, an Artlantis folder is created at the first level of the Programs folder. In this folder are installed
 the executables. The folder contains the following: Artlantis, Artlantis Batch, Artlantis KeyServer, and the
 Media folder
- The online help is accessible from the menu: Help > Artlantis Help.
- Sample files are available into the Scenes folder installed in the Artlantis 4 folder.

NB: When first launching Artlantis, the Firewall displays a QTSocketServer process to reach the network. Please authorize to assure the compatibility of certain Artlantis 32 bit components running in 64 bit.

Serialization


About the Software activation.

In this chapter you will learn about the following subjects:

Activating and Evaluating Artlantis.	5
License Activation for Windows.	5
Deactivating the License.	7
Evaluation Period	8
Installing and activating network licenses.	


Activating and Evaluating Artlantis

The first time Artlantis is launched, the activation and evaluation dialog box appears, as shown below:

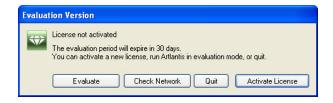

License Activation for Windows

By Internet

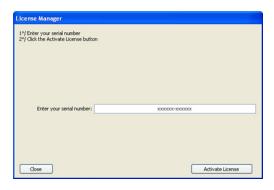

First:

- Locate the serial number (composed of two numbers separated by a dash) shown on your registration card or which was e-mailed to you.
- Check that you are connected to the Internet. Artlantis will have to connect to the activation server.



NB: when launched, Artlantis will check automatically for an Internet connection.

- Enter the serial number.
- Click on the *Activate License* button. A message will be displayed confirming activation. Close the message to display the open file dialog.






NB: *the serial number can be used regardless of whether you are using a Mac or Windows.

Potential Problem

License Cannot Be Validated:




The maximum number of users associated with the license in question has been reached. To activate the license number on a new workstation, you must first deactivate it on the workstation(s) currently using this license*. You can then activate the number on the new workstation. Another solution is to purchase a new license at a reduced cost. Contact your reseller for more information.



NB: * You do not have to uninstall the software. Simply deactivate the license.

Manual

In case of no Internet connection.

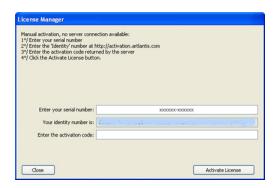


- Locate the serial number (composed of two numbers separated by a dash) shown on your registration card or
 which was e-mailed to you. Note down the identification number located on the license handler (this number
 is encrypted).
- Use a machine connected to the Internet and go to the Artlantis activation site at: http://activation.artlantis.com
- Once the activation page appears, enter the identification number that you had written down earlier then click on the button "Connect to server".






You will be issued with a **license number** that you will need to copy and paste in the *Enter your Activation code* field of the license handler.

Click the Close button to confirm



Deactivating the License


Help Menu> Edit License... click Deactivate.

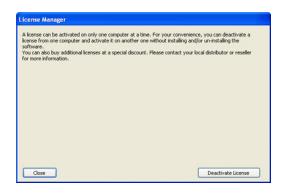

To deactivate the license, click on "Deactivate license". Then click Close.


Manual

In case of no Internet connection.

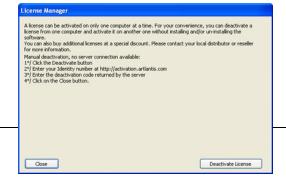



• Click on the Deactivate license button then confirm the deactivation.

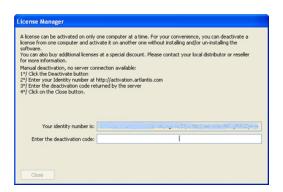

- Note down the identification number located on the license handler (this number is encrypted).
- Use a machine connected to the Internet and go to the Artlantis activation site at: http://activation.artlantis.com
- Once the activation page appears, enter the identification number that you had written down earlier then click on the button "Connect to server".



The server will send you a **code number** that you need to copy and paste in the *Enter the deactivation code* field in the License Manager.

• Click on the *Close* button, then validate to confirm the deactivation.




Evaluation Period

Clicking on "Evaluate" launches Artlantis in evaluation mode for 30 days. All of the application's commands are operational for this period of time: Open, Save, etc. The only restriction is that the Artlantis demo logo appears at the bottom of renderings.

The application will no longer open files after the 30-day trial period has expired. However, it will continue to start up so it can be activated. Contact your reseller to purchase a license.





- Click on "Activate License" to access the activation dialog.
- Click on "Quit" to close the program.



NB: With the licensed version, you can continue any work you started using the evaluation version.

Installing and activating network licenses

Purpose:

Using the Artlantis Keyserver enables you to launch Artlantis on a specific number of client computers connected to the same network.

At an instant t, Artlantis can be launched on x-number of client workstations simultaneously (with "x" being the number of licensed workstations). Once it is launched on x-number of workstations, Artlantis will not launch on any additional workstations without first closing it on one of the stations where it is open.

Requirement:

- A single network with Mac and/or PC workstations connected (Important: no sub-network).
- A special "Network" serial number.
- The Artlantis Keyserver application located in the Artlantis installation directory.

Installation:

Install and validate the license either over the Internet (recommended) or manually.

Step 1 - Activate the network license on the server

• On a LAN, select the computer that will act as the server*, then launch ArtlantisKeyserver in the Artlantis installation folder.


* The server can be any computer connected to the network. It is best to select a computer that is connected to the Internet.

Click on "Edit License...". The license manager is displayed.






Validation by Internet:

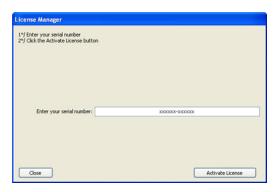

• Enter the network number (composed of two numbers separated by a dash) shown on your registration card or which was e-mailed to you. Then click on *Activate License*. A message should confirm that the license has been activated correctly.

Validating manually:

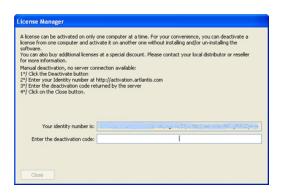


- Locate the **serial number** (composed of two numbers separated by a dash) shown on your registration card or which was e-mailed to you.
- Note down the **identification number** located on the license handler (this number is encrypted).
- Use a machine connected to the Internet and go to the Artlantis activation site at: http://activation.artlantis.com
- Once the activation page appears, enter the identification number that you had written down earlier then click on the button "Connect to server".





You will be issued with a **license number** that you will need to copy and paste in the *Enter your Activation code* field of the license handler.



Start the Artlantis Keyserver* application located in the Artlantis folder that was installed.

NB: Artlantis KeyServer must be launched only on the server workstation. The server identification number is activated only once on client workstations.

* In order for the client workstations to be able to use Artlantis, the Server must be activated and Artlantis Key-Server launched. They can operate on the Artlantis server and Artlantis Keyserver at the same time.

Step 2: Install Artlantis on the client workstations.

- Make sure that Artlantis Keyserver is launched on the server. You can now launch Artlantis on the client stations
- Click on Check Network to find an available key. If there is an available license on the server, the application
 will be activated immediately.




Potential Problems

- If Artlantis prompts you for a serial number on a client workstation: Check that the computer is connected to the local network. Check that the Artlantis Keyserver has been started on the server.
- On Servers with Windows XP in SP2 mode and with the Firewall activated.
- Click the unblock button when the Firewall shows that the Artlantis Keyserver or Artlantis is trying to use the network.
- For another Firewall, ensure that port TCP 49151 is open.

NB: changing this setting does not affect the security of the Mac or the operation of other software.



Opening 3DS Files

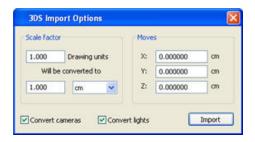

- Scale factor: reduces or enlarges object size. The scale factor is a homothetic coefficient.
- Converting cameras or lights: Imports lights and/or cameras defined in the original model.
- Translation: Redefines the position of the imported object relative to the scene's geometric tag.


NB: Artlantis imports material names, textures and fixed cameras.

Opening an Artlantis File

Either by:

Double clicking on an ATL or AOF file.

When the following dialog appears on opening a file, this means that one of the Medias associated with the project is missing. Click on the missing element(s)

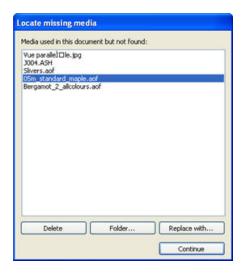

- *Delete*: permanently deletes the missing linked Media, it will no longer be requested when the document is opened.
- Folder...: lets you browse the hard disk to find the folder containing the missing listed elements.
- Replace with...: allows the missing Media to be substituted by another.
- Continue: closes the dialog box and saves the options selected.



Opening a File when the Application Launches




Open Recent

• Lists the last 10 Artlantis documents opened.

Open...

• Displays the dialog box for opening documents.

Artlantis files saved in a version earlier than 2.0 must be converted when they are opened. When this occurs, Artlantis displays a data conversion dialog:

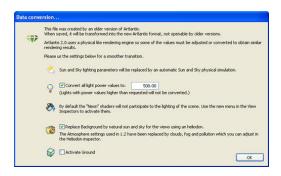

Convert lamp power:

In version 1.2, lamp powers varied from 0.10 to 5,000. From version 2.1, the power varies from 1 to 1,000,000.

- Box checked: The lamp power values will be readjusted according to the new 1 to 1,000,000 scale. If you use the digital field to set the value beyond that, the power values will not be replaced.
- Box unchecked: Lamp power values are retained. Note: the lamps will not have the same intensity.

The neon Shaders are not activated, so they will not take part in the lighting of the scene:

By default, the neon Shaders in version 1 will be deactivated. You can activate them using the viewpoint inspector drop-down menu.

Replace current background with natural sun and sky:

- Box checked: The sky and sun replace the background defined in version 1.2.
- Box unchecked: The version 1.2 background is not changed.

Activate infinite ground:

- Box checked: An infinite ground will be placed at an altitude of 0. The altitude setting will be made in the Object inspector.
- Box unchecked: No infinite ground. However, infinite ground may be activated in the Object inspector.



Quit


· Closes the program without opening any document.

Drag/Drop a file to the Artlantis icon



 $\it NB$: Artlantis also reads the old $\it OPT/DB$ file formats produced by Artlantis 4.0

Opening DWG/DXF Files

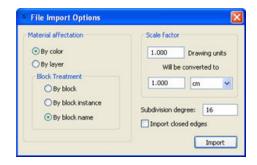

- Scale factor reduces or enlarges object size. The scale factor is a homothetic coefficient.
- Curve segmentation value: The number of stops needed to define a curve or a circle entity.
- Import closed contour: Considers closed edges to be the same as surfaces.
- Block treatment: Interprets the block's material based on the following:
 - Its composition
 - Its instantiation
 - Its name
 - A distinct block has a distinct material.
 - Each component of a given block has a distinct material.
 - A distinct material is attributed to each block name.
- Allocating materials: To be defined either depending on the colors or the block layers.

NB: Artlantis recognizes the ACIS 3DSolid entities of AutoCad dwg and dxf files. Artlantis imports material names and fixed cameras.

Opening DWF Files



- Scale factor reduces or enlarges object size. The scale factor is a homothetic coefficient.
- Coordinate system:




- Convert from up-axis: The height is defined in the modeler according to the depth of the Y axis or the height of the Z axis.
- Convert from handedness: Right or left, viewed from above, changes the object's symmetrical view.
- Use units and coordinate system settings: import the file with the standard settings.



NB: Artlantis imports material names and textures.


Opening OBJ Files

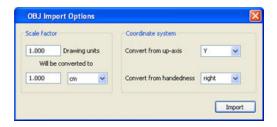

- Scale factor reduces or enlarges object size. The scale factor is a homothetic coefficient.
- Coordinate system:
 - Convert from up-axis: The height is defined in the modeler according to the depth of the Y axis or the height of the Z axis.
 - Convert from handedness: Right or left, viewed from above, changes the object's symmetrical view.

* You must also generate an MTL file when importing textures. The OBJ and MTL files must be side by side when importing.

Opening FBX Files

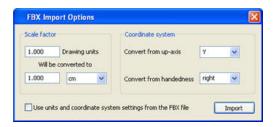

- Scale factor reduces or enlarges object size. The scale factor is a homothetic coefficient.
- Coordinate system:
 - Convert from up-axis: The height is defined in the modeler according to the depth of the Y axis or the height of the Z axis.
 - Convert from handedness: Right or left, viewed from above, changes the object's symmetrical view.

NB: Artlantis imports material names, textures, light sources and fixed cameras.



Using Reference Files

File Menu > Use Reference File...



This command lets you:

- Refer to a previously created at file in order to recover Shaders, Lights, Heliodons, Objects, Perspectives,
 Parallel Views, Panoramas, VR Objects or Animations as desired.
- Update the geometry and materials between the modeling software and Artlantis.

In the dialog box, check the elements to be recovered from the reference file: Shaders, Lights, Heliodons, Objects, Perspectives, Parallel views, Panoramas, VR Objects, Animations.

Example of Updating Geometry*:

Let us assume that you need to add a door to a document named "A.atl" that is dressed, lighted, etc.

Steps:

- 1. Save the current A.atl document.
- 2. Return to the modeler and add the door. Export the file again and rename it B.atl.
- Open the B.atl file in Artlantis. Select Use Reference File... from the File menu and select the reference file A.atl
 in the dialog box.

Artlantis will apply the checked options from file A to file B, i.e. **Shaders**, **Lights**, **Heliodons**, **Objects**, **Perspectives** and **Parallel Views**.

NB: for files from modelers which export in file formats DWG, DXF, 3DS, FBX, OBJ, DWF or SKP, you must first save the files in .atl format.

NB: limitations to the Use reference file... command :

- 1 if a material has been renamed or reassigned, it will not be included
- 2- if a part of the geometry has been saved as an object, the destroyed geometry will reappear
- 3- if the Artlantis layers containing the geometry of the scene are renamed, the geometry they contain will not be included.

NB: * the CAD software ArchiCAD and Vectorworks allow you to directly update an atl file already worked on in Artlantis. Please refer to the documentation for the software involved.



Saving a Document

Artlantis saves in the following file formats:

ATL: The working document.

AOF: Format for scenes, as well as objects.

Archive: Contains all elements of a project.

DWF: The vector graphics file format for AutoCAD 2D and 3D.

<u>OBJ</u>: Wavefront file format. SKP: SketchUp file format.

In this chapter you will learn about the following subjects:

Saving an ATL Document	19
Saving an AOF Document	19
Saving a DWF Document	20
Saving an OBJ Document	
Saving an SKP Document	
Saving an Archive	

Saving an ATL Document

Saves the current Artlantis document to your file system. If you try to close an unsaved document, or you attempt to quit Artlantis when an unsaved document is open, Artlantis will warn you to save your work before continuing.

File > Save



NB: Saved documents will no longer be compatible with earlier versions.

Saving an AOF Document

Saves the entire active scene as an .aof object. Does not replace or close the file you are currently working on.

NB: The origin of the created object is similar to the Scene origin, to modify See "Transfer the origin of the anchor point:" page 132

• Select File > Export as Object...



1. Include light group:

• Choose the light group you wish to save with the object. This group will be automatically integrated into the project concerned.




2. Object positioning:

- Always vertical regardless of the surface to which it is applied (for example, a vehicle).
- Perpendicular to support on which it is placed.

Saving a DWF Document

Saves the whole active scene in DWF format. Does not replace or close the file you are currently working on.


• Select File > Export...> DWF.



Saving an OBJ Document

Saves the whole active scene in OBJ format. Does not replace or close the file you are currently working on.


• Select File > Export... > OBJ.



Saving an SKP Document

Saves the whole active scene in SketchUp format. Does not replace or close the file you are currently working on.

• Select File > Export... > SketchUp.





Saving an Archive

Saves the current document in the folder that groups all of the elements pertaining to the active document: *.atl files and media folders: Shaders, Objects and Images and an ArchiveReport.txt file. This is a useful function for users to share their projects.

File > Export as Archive...



Artlantis Interface

General Information

By default, the Artlantis menu bar, the inspector navigation palette and the **Preview window** appear when the program is started up.

The following other elements can be called up: General Preferences, the 2D View window, the **Media Catalog**, the **Timeline** and **the Batch Rendering window**.

Place the cursor over the palettes and window commands to display pop-up help bullets.

You can drag and drop **Objects**, **Shaders**, **Textures** and **Background Images** from the catalog or directly from the hard drive to the Preview window.

Placement of Artlantis Palettes and Windows

- 1. Menu bar
- 2. **Document preparation palette**(dockable palette)
- 3. Navigation tools palette (dockable palette)
- 4. Artlantis tools palette (dockable palette)
- 5. Viewpoint and layer selector (dockable palette)
- 6. **Inspector palette**
- 7. Viewpoints List
- 8. Preview
- 9. 2D View Window
- 10. <u>Catalog</u> (dockable palette)
- 11. <u>Timeline</u> (dockable palette)



In this chapter you will learn about the following subjects:

Navigation Inspector. 24



The Artlantis Menus	25
File Menu	25
Edit Menu	26
Display Menu.	26
Inspector Menu.	28
Window Menu	29
Tools Menu	29
Help Menu.	29
The 2D View Window.	29
Editing in 2D View.	30
Fixed Images	30
Animations	30
2D View Display and Navigation Tools.	30
Customizing the 2D View Toolbar	31
Editing in 2D View.	31
Editing the Clipping Box	73
In 2D View.	73
Preview Representation.	74
The Preview Window.	74
Preview Display and Navigation Tools.	75
Customizing the Preview Toolbar.	76
The Timeline Window.	77
Introduction:	77
Display.	77
Animating.	77
The Timeline window is divided into the following four areas:	78
Keyframes and Guides.	81
Keyframes	81
Cuidas	85

Navigation Inspector

Enables the user to edit viewpoints and animations, to configure model dressing, apply lighting effects and integrate the project into its environment.

The behavior of certain mouse and keyboard shortcuts is dependent on the current Inspector.

The Inspector is a detachable palette, Ctrl + click at the top of the palette. To move it, click at the top of the window. To re-insert into the window, drag it to the left-hand part of the window.

The following nine inspectors are available:

Shaders
Lights
Heliodons
Objects
Perspectives
Parallel Views
VR Objects

Animations





Activation and changing from one Inspector to another: either via the <u>Inspector</u> menu, or via the *document preparation toolbar* available in the toolbar.

• Click on the desired Inspector (e.g. Heliodon in the figure below).



To navigate between viewpoint and animation inspectors, click on the arrow on the right.

The Artlantis Menus

Use the menu bar to access the following commands: file management, display, navigation among the various edit modes, managing window opening and closing, and online help.

In this chapter you will learn about the following subjects:

File Menu.	
Edit Menu	
Display Menu	
Inspector Menu.	
Window Menu.	
Tools Menu	
Help Menu.	

File Menu

Contains the commands for managing documents (opening, saving and printing).

Open...

Saved Artlantis *.atl document. This command will directly open files in the following formats: atl, aof, opt/db, dwg, dxf, dwf, obj, fbx, skp and 3ds.



NB: Artlantis recognizes the ACIS 3DSolid entities of AutoCad dwg and dxf files.

Keyboard Shortcut: Ctrl O Merge Geometry from File...

A file currently opened can be merged with another file: atl, aof, opt/db, dwg, dxf, dwf, obj, fbx, gs1, skp and 3ds.

Save

Saves the current Artlantis document to your file system. If you try to close an unsaved document, or you attempt to quit Artlantis when an unsaved document is open, Artlantis will warn you to save your work before continuing.



NB: Saved documents will no longer be compatible with earlier versions.

Keyboard Shortcut: Ctrl S



Save As...

Opens the Save As dialog box, pointing to the current folder. You can save the current file as a new document. (Enables the user to rename the file and save it to a different folder). The new file becomes the active document.

Reverts to the saved version

Active document when it was last saved.

Export as Object...

Saves the entire active scene as an ".aof" object. Does not replace or close the file you are currently working on.

Export as Archive...

Saves the current document in the folder that groups all of the elements pertaining to the active document: *.atl files and media folders: Shaders, Objects and Images and an ArchiveReport.txt file. This is a useful function for users to share their projects.

Export...

Exports the geometry of the current document in OBJ, SKP or DWF format.

Use reference file...

Recovers all or part of the elements from a different at lfile into the current file. This can import shaders, lights, heliodons, objects and cameras from Perspective and Parallel views.

Edit Menu

Standard commands for handling files: Undo/Redo/Cut/Copy/Paste/Erase/Preferences.

Undo

Undoes the last command. Also allows the user to step backwards, undoing all operations performed since the document was opened. The number of operations that can be recovered is limited only by the amount of memory available. The command's heading shows what action is undone and applies to the active window. *Redo* is the opposite operation of Undo.

Keyboard Shortcut: Ctrl Z

Redo

Reverses the last *Undo* command and displays the action to be redone in the heading.

Keyboard Shortcut: CTRL Shift Z

<u>Cut</u>

Works in numeric fields and inspector lists. The cut element is stored in the clipboard. Clipboard contents are retained until the next Cut/Copy operation is performed.

Keyboard Shortcut: Ctrl X

Copy

This command works in digital fields and inspector lists. The element copied is stored in the clipboard. Clipboard contents are retained until the next Cut/Copy operation is performed.

Keyboard Shortcut: Ctrl C

<u>Paste</u>

Pastes the contents of the clipboard into inspector lists and numeric fields. Clipboard contents are retained until the next Cut/Copy operation is performed.

Keyboard Shortcut: Ctrl V

Delete

Removes the items selected in inspector lists, numeric fields, and objects in the scene.

Preferences

Defines the program's overall behavior.

Display Menu

The project's display commands are in the active view (Preview window, 2D View window).



Enlarge/Reduce

- In the Preview window
 - Factor of x1.5 from center. Sizes are to be defined in the Artlantis **Preferences**. Maximum size 1200x1200, minimum size 640x640.
- In the 2D View window
 Factor of x1.5 from center.

Keyboard Shortcut: Enlarge + and Reduce -

Fit to Window

- In the Preview window
 - Fit the view to the window size.
- In the 2D View window
 Instantly displays all elements of a project.

Keyboard Shortcut: =

Back to Original View

Returns to the viewpoint present when it was activated.

Zoom

Acts the same way in the Preview and 2D View windows except that, in Preview, the camera target and the focus are recomputed.

- Zoom + click in the window enlarges the view x2 from the point clicked.
- Zoom + click, followed by dragging and dropping into the window enlarges it in relation to the center of the rectangle.

To zoom out, press the *Alt* key before clicking or describing the limiting box. The tool deactivates when the command is finished.



NB: In Windows, only the 2D View is affected.

Pan

Drag and drop to move the content to the appropriate window. The tool deactivates when the command is finished. The camera target is recalculated for the Preview window.



NB: In Windows, only the 2D View is affected.

Holding down the middle button on the mouse produces the same effect.

Change 2D View

Replaces the current projected view with a different one: Top, front, right, left or back.

Keyboard Shortcut: Ctrl 1, 2, 3, 4 or 5

<u>2D View Display</u>

Enables the user to change the type of display: Wireframe or Textured mode.

Back

In 2D view, this enables the user to navigate by back-stepping upwards through the sequence of views displayed in the tree structure.

Keyboard Shortcut: Ctrl <

<u>Next</u>

In 2D View, this enables the user to navigate downwards through the sequence of views displayed in the tree structure.

Keyboard Shortcut: Ctrl>



Hide Toolbar

Displays/hides the bar for the view active in Preview or 2D View.

Status Bar

Displays/hides the bar and provides information on the display progression in the Preview window.

Toolbars

Displays/hides the command groups belonging to the bar in question: Prepare Document, Navigation Tools, Artlantis Tools, Viewpoint Selector, Radiosity box, Show Text and Lock Toolbars.

Inspector Menu

Contains the inspectors for views (perspectives, parallel views and cuts), lighting effects (lights and heliodons), scene dressing (shaders, textures and objects), and environment (background and foreground images, insertion to site, depth of field, atmosphere and ambient).

NB: It is not always necessary to change the edit inspector to modify a project. There are sufficient commands available, regardless of which inspector is active.

Perspectives

Displays the Perspectives inspector.

Parallel Views

Displays the Parallel View inspector.

Panoramas

Displays the **Panoramas inspector**.

VR Objects

Displays the VR Object inspector.

Animations

Displays the Animations inspector.

Shaders

Displays the Shader inspector.

Lights

Displays the Lights inspector.

Heliodons

Displays the Heliodon inspector.

Objects

Displays the **Object inspector**.

Render

Displays the **Render Window** for defining rendering options and format, as well as destination.

Keyboard Shortcut: Ctrl R

Partial render

In the Preview window, draw a rectangle by dragging across two opposite corners to define the area you wish to render. The rendering appears in a new window. The Save Image dialog box appears when you close the rendering.

Keyboard Shortcut: Ctrl Shift R

Batch Rendering...

This window handles the status, destination and format of batch renders that have been defined in advance using the Render command.



Window Menu

Contains the window activation commands: 2D View, Catalog and Timeline.

Inspector

Displays/hides the Inspector palette

2D View

Displays the 2D View window: Top, front, right, left or back.

Catalog

Displays the Media Catalog.

Timeline

Displays the Timeline.

Rendering Parameters

Displays the rendering settings dialog.

Scene information:

Displays the scene settings dialog.

Tools Menu

Create Shader

Opens the Edit Shader dialog

Create a PostcardTM

Saves the current view as a PostcardTM

Help Menu

Artlantis Help

Online Artlantis documentation containing reference information on each of the program's functions, plus detailed illustrated tutorials.

Keyboard Shortcut: F1

Artlantis Web Site

Opens your Web browser to the <u>Artlantis page of the Abvent site</u> by default: The English language Artlantis forum, product information, updates, FAQs, training, etc.

Tutorials

Displays the tutorials page in the help window.

Additional Media

Displays additional media available on the Artlantis Web site

Online registration...

Lets you register the product directly on the Abvent site. Fill out the form displayed then confirm.

Edit License

Displays the License activation manager.


About Artlantis

Shows the version number.

The 2D View Window

This is used for viewing and editing the project in the following five projected views: Top, front, right, left or back. View display is independent of the current inspector. Example: In the Perspectives inspector, you can edit lights in 2D View without activating the Lights inspector.



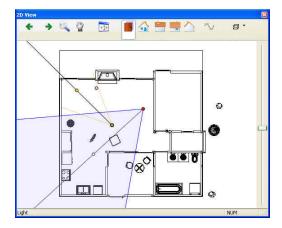

2D View Display and Navigation Tools

Customizing the 2D View Toolbar

Keyboard and Mouse Shortcuts

Editing in 2D View

Right clicking on the element you wish to edit displays a pop-up menu for the current operations: *Duplicate*, *Delete*, *Attribute To*, etc. These are performed in real time in the Preview window and in the relevant inspectors.

Fixed Images

Working with Objects in 2D View

Working with Parallel Views in 2D View

Working with Perspectives in 2D View

Working with Lights in 2D View

Modifying Heliodons

Working with the Clipping Box in 2D View

Animations


Working with Panoramas in 2D View
Working with VR Objects in 2D View

Working with Panoramas in 2D View

2D View Display and Navigation Tools



Default Tools Available



Fit to Window: Maximizes the display of all of the geometry and lights to the full size of the window.

Zoom: Increases the zone defined by a rectangle. Alt+Zoom reduces the display.

Pan: Reframes the content of the window.


Change View: A drop-down menu for selecting the projected view.



Edit Path: In animation mode, is used for creating or modifying a path relative to a camera, a light or an enject

Customizing the 2D View Toolbar

The following tools are available by right clicking on the bar:

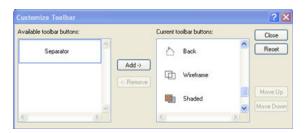

• To add or delete tools, select them from the "Available buttons" or "Toolbar Buttons" columns. You can use drag and drop between these two columns.



Display mode: Switches from wireframe to textured display.

Editing in 2D View


In this chapter you will learn about the following subjects:

Working with Perspectives in 2D View.	
Working with Parallel Views in 2D View.	34
Working with Objects in 2D View.	
Working with Lights in 2D View.	
Editing Heliodons.	42
Working with the Clipping Box in 2D View.	44
Working with VR Objects in 2D View.	45
Working with Panoramas in 2D View.	49
Working with Camera Animation in 2D View.	52
Working with Light Animation in 2D View.	60
Working with Object Animations in 2D View.	66



Working with Perspectives in 2D View


Display Wireframe Mode	State or Action	Comments
۰	Viewpoint inactive	Represented by the camera (gray point).
	Active viewpoint selected.	Represented by the camera (red point), the target (gray point), the focusing angle (blue lines) and the angle's bisector line (gray line).
	Move the camera.	Move the red point.
	Move the target.	Move the gray point.
	Move the camera in a parallel direction.	Move the gray bisecting line.
	Change the focusing angle.	Move one of the two blue lines.
	Duplicate viewpoint	Press ALT and move the camera (red point). or
		Right click on the

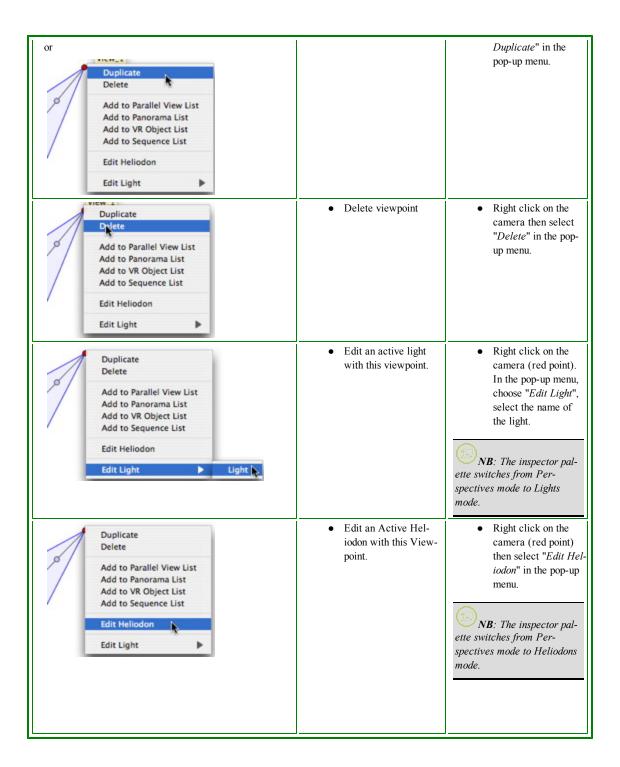



Working with Parallel Views in 2D View


Display Wireframe Mode	State or Action	Comments
•	Viewpoint inactive	Represented by the camera (gray point).
	Active viewpoint selected.	Represented by the camera (red point), the target (gray point), the width of view (red lines) and the symmetry axis linking the camera and the target (gray line).
	Move the camera.	Move the red point.
	Move the target.	Move the gray point.
	Move the camera in a parallel direction.	Move the gray symmetry axis.
	Define the view area.	Move one of the red lines.

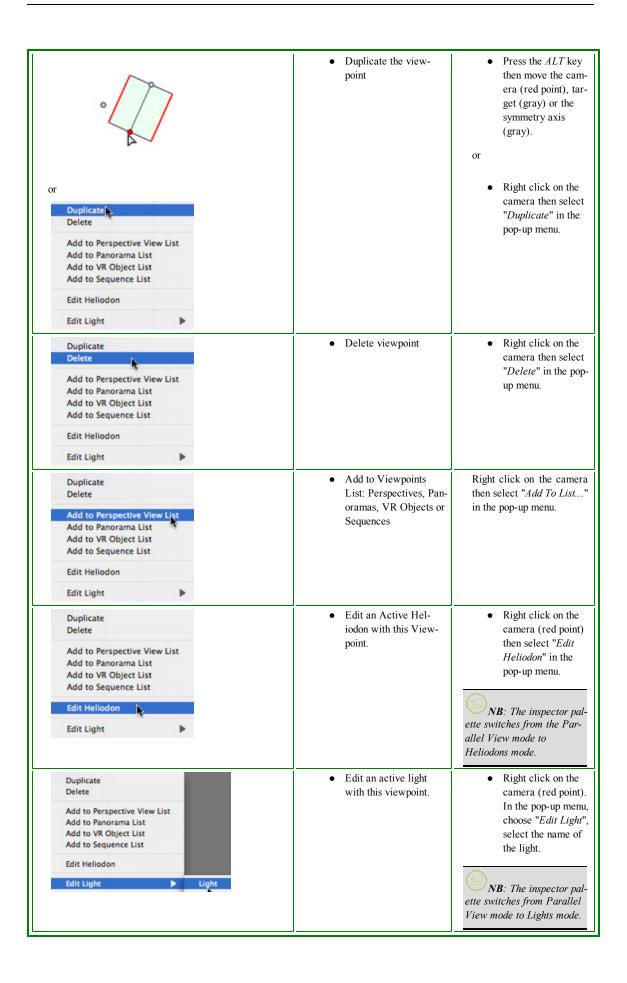



Working with Objects in 2D View

Display Wireframe Mode	State or Action	Comments	
	Object deselected	Represented by the geometry and a green center point.	
	Selected object	Represented by the geometry and a blue center point.	
	Move an object.	 Move the blue point if the object is active or green point if it is inac- tive. 	
	Duplicate an Object.	Press Alt and move blue or green point.	
1	Multiple duplication of an object	 Press Shift+Alt keys and draw out a (green) line. Hit the "plus" key to indicate the number of copies (pink points). Press the "minus" key to remove them. Confirm by hitting Enter. 	
3			
1	Make Multiple Duplicates of More than One Object.	 Select the objects: Ctrl+click the objects Press Shift+Alt keys and draw out a (green) line. Hit the "plus" key to indicate the number of copies (pink points). Press the "minus" key to remove them. Confirm by hitting 	
2		Enter.	

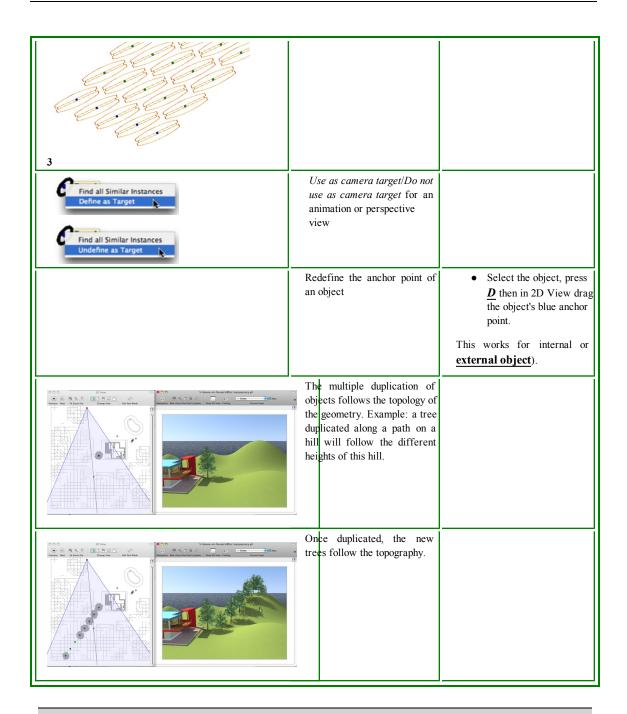



NB: Objects are deleted from the inspector list.



Working with Lights in 2D View

Display Wireframe Mode	State or Action	Comments
•	Deselected light is off	Represented in shaded yellow.
•	Selected light is off	Represented in shaded yellow circled in black.
•	Deselected light is on	Represented in bright yellow with thin black circle.
•	Selected light is on	Represented in dark orange with thick black circle.
	Move a light	Move the yellow point(s) depending on the type of light.
Turn On Turn Off Duplicate Cut Copy Delete Edit View Using This Light	• Turn On/Off	Turn current light on/off. NB: Selecting more than one light enables you to turn them on/off at the same time.
Turn On Turn Off Duplicate Cut Copy Delete Edit View Using This Light	Duplicate a light.	Hit the <i>Alt</i> key to move the yellow point. Or Right click on the yellow point and select " <i>Duplicate</i> " in the pop-up menu. NB: The duplicated light retains the parameters of the reference light (power, shadows, etc.).

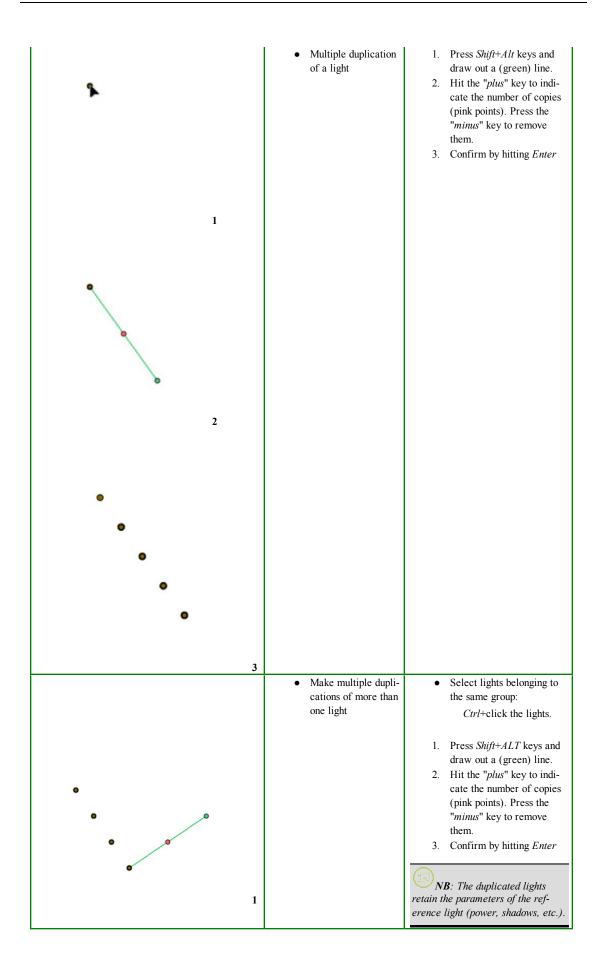

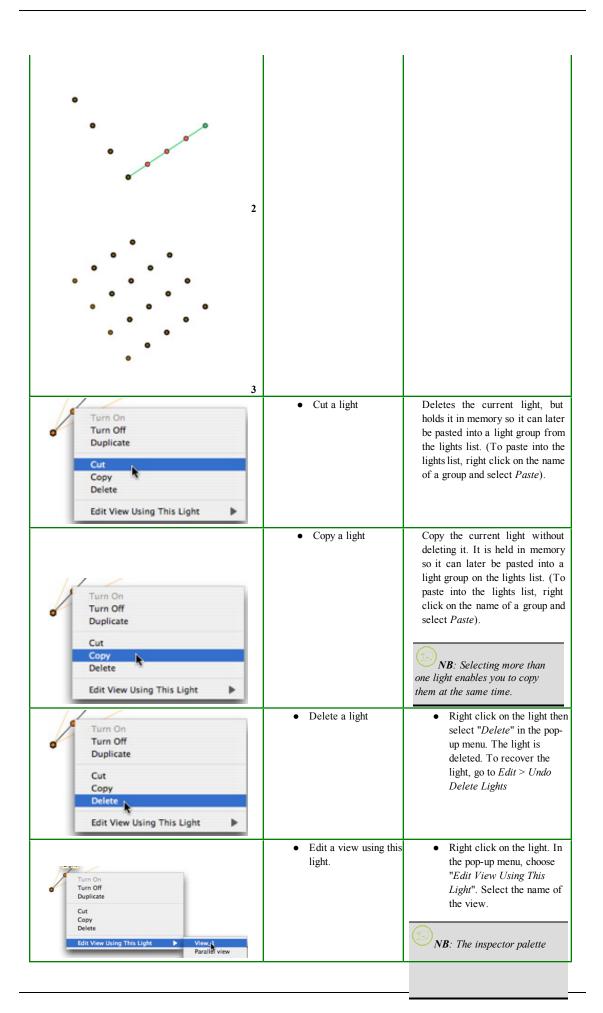


	switches from the Lights mode to
	Viewpoints mode (Perspectives or
	Parallel Views).
	,



Editing Heliodons

Sun Position	Display Wireframe Mode	State or Action	Comments
Position the sun based on the geographical location, date and place		Orientation	True North (compass point).
	San Francisco	Setting the orientation of North Pivot the yellow point around the compass. The yellow arrow will move accordingly around the circle.	The rays of the sun (yellow lines with arrow points) are positioned depending on the location, true North and the date and time. **NB: Use the Heliodons inspector to configure these elements, except for true North.* Shadows are then recomputed in the Preview window.
Manually move the sun.		Manually positioning the sun.	Shadows are then recomputed in the Preview window.

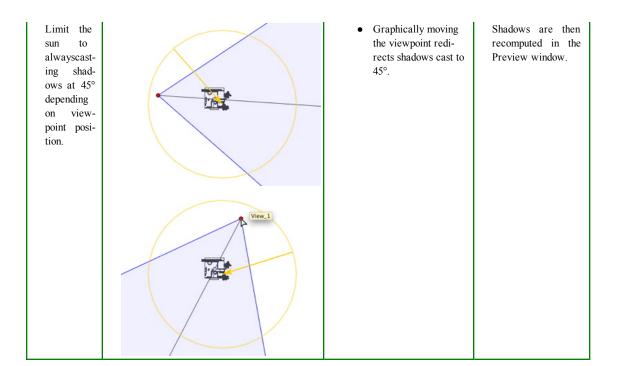




Working with the Clipping Box in 2D View


Wireframe Display Mode	State or Action	Comments
	Limiting box	Represented by a blue cross-hair and rectangle.
	 Click/drag inside the box to move it. 	
	Resize Clipping Box	Move the blue points located at the corners.
	● Turn Clipping Box	Turn the blue handle of the crosshair around its center. Move the center of the crosshair to redefine the axis of rotation
	Elevated view	Editing operations are the same as in plane view, except that the box does not pivot.

Working with VR Objects in 2D View

Wireframe View on Plane Mode Display Hemispherical Toric Spherical	Wireframe View in Elevation Mode Display mode	State or Action	Comments
0		VR object deselected	Represented grayed by the target and a circle.
	Dr	VR object selected.	Top view: represented by the camera (gray dot on the circle), the target (central red dot).
			The camera moves around the blue circle. The focus opening angle is defined by the two blue lines and the angle bisector (gray line).
			In Elevation: The target point is red. Two gray points linked by a shaded line represent the camera altitude. The small red points on the
			circle represent the camera movement pitch (pitch value dissociated in top and elevated views).
VROBJECT 0		Move VR objects.	Top view: • Move the target in red, or the bisector in gray. In Elevation:
			Move the target in red or the shaded horizontal line.
or			
	0		

VROBJECT 0			
VROBJECT 0		Move the camera.	 Move the gray point in the blue circle. In Elevation: Adjust the camera height by moving the shaded horizontal line that runs through the two gray points. NB: In these views, the camera position defines the starting image when the VR objects are read.
VROBJECT 0	N/A	Change the focusing angle.	Move one of the two blue lines.
Horiz, Shift Horiz, Angle Radius 20 360 16.00 m	N/A	Angle Opening Constraint • Lock position of VR object starting angle.	Indicates the starting position of the angle opening relative to 0° in a trigonometric circle. • Pivot the blue radius around the red point in the center. This changes the constraint value in the VR Object/Coordinates inspector.

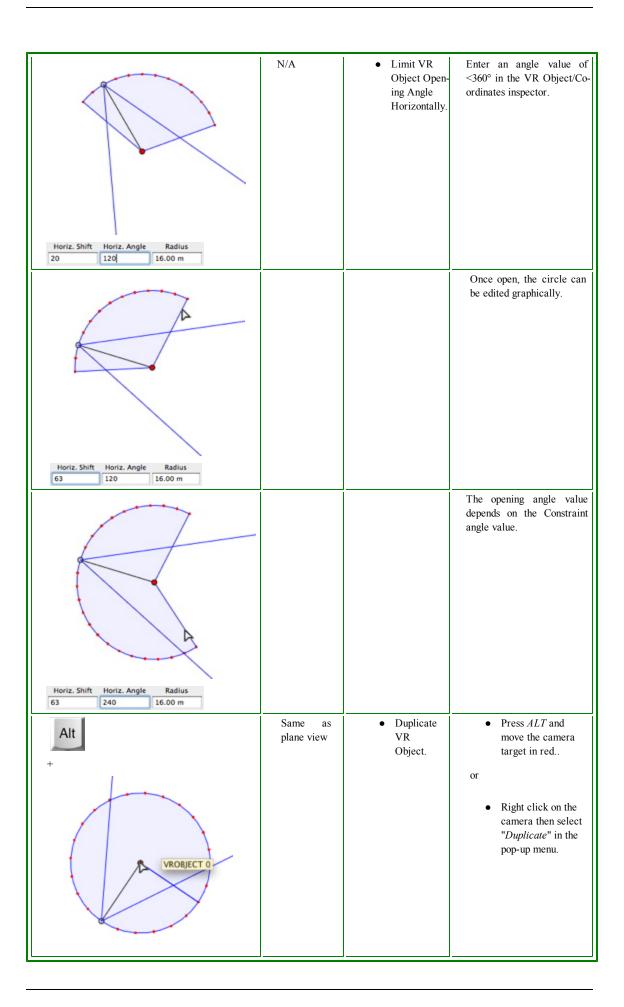

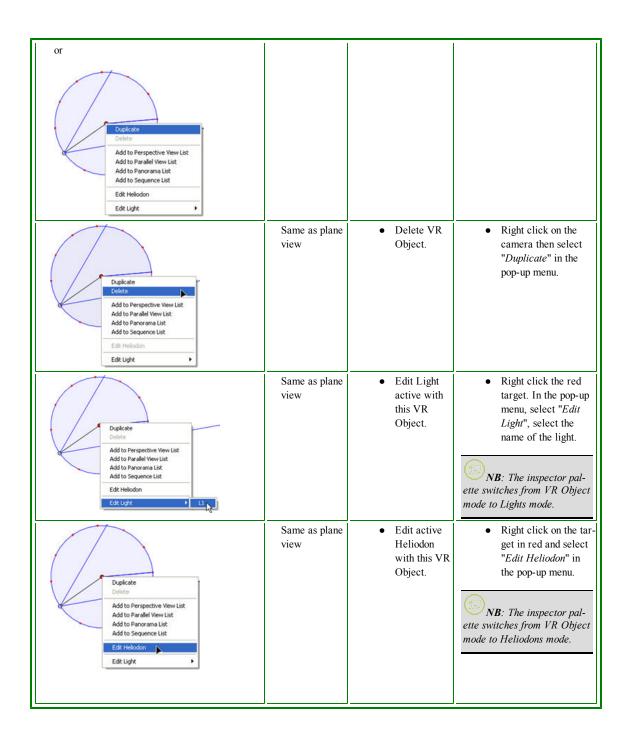


Working with Panoramas in 2D View


Wireframe Display Mode	State or Action	Comments
•	Node deselected	Indicated by the camera (gray dot) and the horizontal or vertical viewpoint movement circle. Viewpoint active.
	Node selected	Represented by the camera (red point), with the target (blue) moving in a circle (blue circle), the focus angle (blue lines) and the angle's bisector line (red line).
PANORAMA	Move the viewpoint.	Use the red point for this.
PANORAM	Move the target.	Move the blue point in the blue circle. NB: The target point position defines the starting image when the panorama is read.



	Move the node in a parallel direction.	Move the red bisecting line.
A	Change the focusing angle.	Move one of the two blue lines.
OT PANORAMA PANORAMA OT Other Add to Parallel View List Add to Parallel View List Add to Sequence List Edit Heliodon	Duplicate the node	 Press ALT and move the camera (red point) Right click on the camera then select "Duplicate" in the pop-up menu.
Deplicate Delicate De	Delete the node	Right click on the camera then select "Delete" in the pop-up menu.

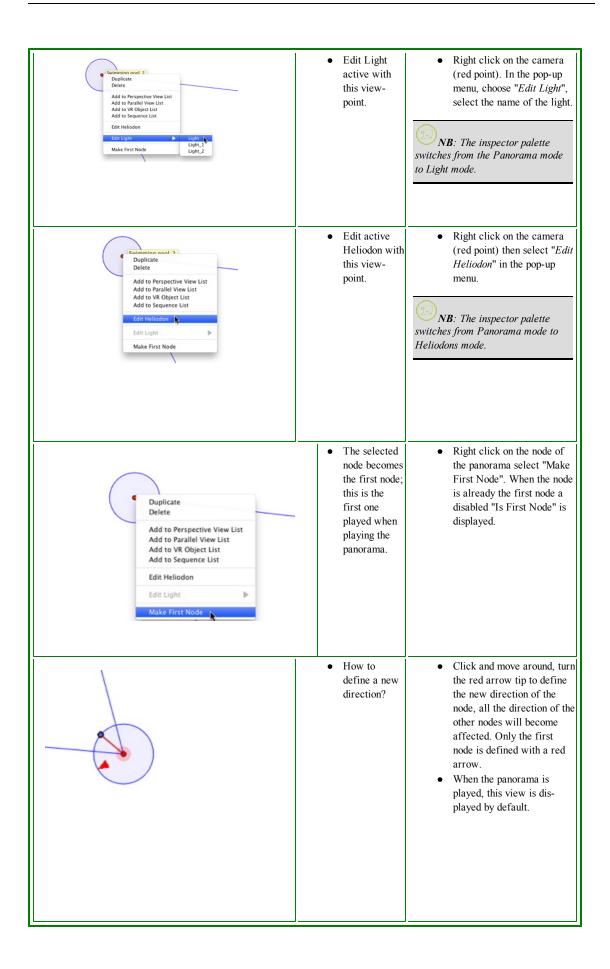



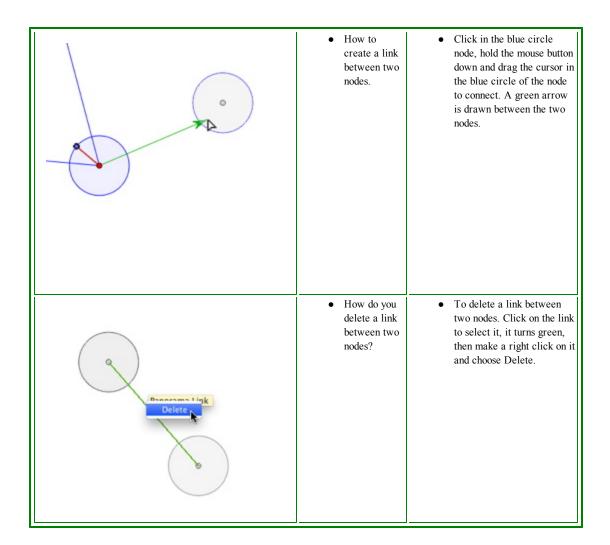


Working with Camera Animation in 2D View

2D View Window

Path edits are clearly distinguished from keyframe edits.

This concerns the paths for cameras, lights, and objects as well as the relevant pop-up menus.


Editing Paths

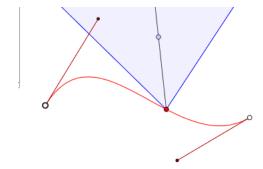


Camera path is in red.

NB: Camera target points can be edited graphically at any time, regardless of whether record mode is on or not.


Use the *Edit Path* tool in the window bar to select the mode.

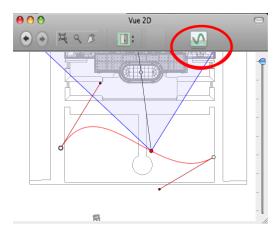

• Button pressed: Path editor is active (As a result, editing the keyframe in the view is inactive).

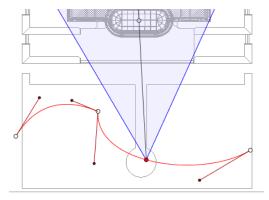


• Button raised: Keyframe editor is active (As a result, the path is visible but cannot be edited).

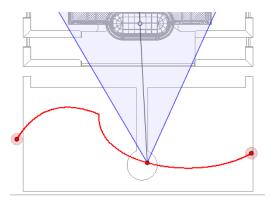



Create Path

- In mode, move the camera viewpoint.
- This draws a red path in a straight line.

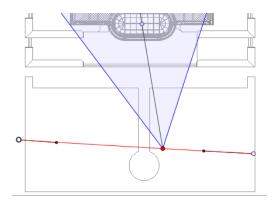


- White dots circled in gray indicate start and end points that have tangents.
- The tangent handles are indicated by red dots circled in black.

Move Path

• Click on the path and move it.

Editing the Path


• Use the handles to graphically edit the tangents.

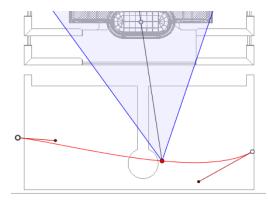


Add a Control Point

• Right clicking on the red path line and selecting "Add Control Point" displays a gray circle and a tangent with two editing handles.




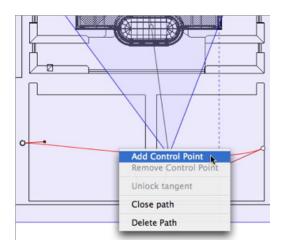

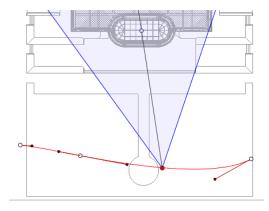


To edit a portion of the tangent at a point

• Right click on the point and select "Unlock Tangent" to create an inflection point on the path.

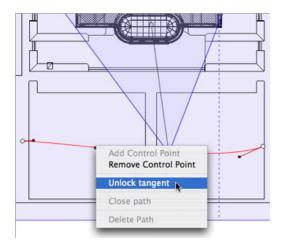





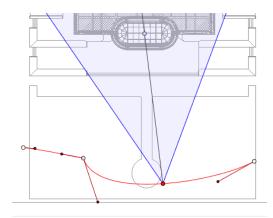

To delete the inflection point

• Right click on the point and select "Lock Tangent".

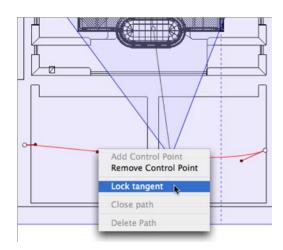

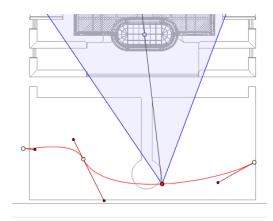



Extend Path

Extends the path without touching the existing animation.

• Alt+Click on the last control point created for the path.



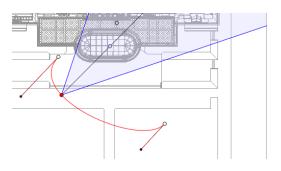

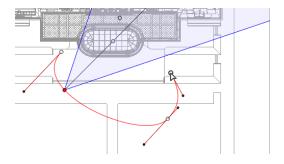

• Creates a new control at the end of the path.



NB: The timeline can be used to play the sequence at any time.

Path Edit Pop-up Menu


• Right clicking on the red path displays a pop-up menu with the following options:



- Add Control Point: adds an editable point to the path.
- Delete Control Point: deletes the point from the path (except the end points).
- Close Path: closes the path on itself.
- Open Path: re-opens the path.
- Delete Path: deletes the path.



Editing Keyframes

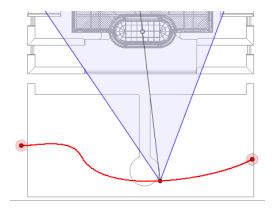

Camera path is in red.




NB 1: You must be in record mode in order to edit in the Timeline.

Keyframe Edit Pop-up Menu:

- Add Keyframe: adds a keyframe.
- Delete Keyframe: deletes a keyframe


Add a keyframe

- In mode, button is raised (not active).
- In the <u>Timeline</u> window, click on record in 2D view, right click the path, select "*Add key frame*" from the pop-up menu.

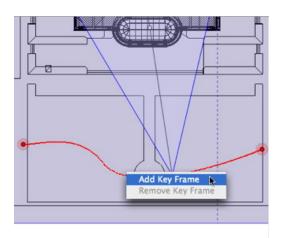

This creates the keyframe.



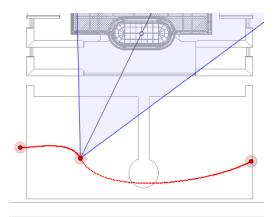

The keyframe can be moved graphically on the path, making it possible to speed up, slow down, etc.


NB: A keyframe selected in 2D View appears with a red pin on the Timeline. A pause can be created in the movement of the element by duplicating a keyframe in the Timeline.

NB 2: When editing or reading a sequence, the <u>Preview window</u> displays the content in OpenGL Navigation mode if "Automatic Switch to OpenGL" has been checked in the preferences.

The 2D View Edit Filters Pop-up Menu:

This displays and/or hides paths in order to improve editing in 2D View.

Right clicking on the white background of the 2D window displays the following pop-up menu that makes it
easier to edit in 2D View, as well as display and hide paths.



- Show All: displays all camera, light and object paths.
- Show only current type elements: Depending on which inspector is active (Animations, Lights or Objects), displays all camera, light or object paths.
- Show Only Current Element: displays only the path currently being edited.

Viewpoint Edit Pop-up Menu:

Regardless of whether the user is in path or time edit mode, right clicking on a camera's target or one of the blue lines that represent the focus opening will display a pop-up menu with the following options:



- *Duplicate*: duplicates the sequence; the current camera position becomes the default view and the path is not duplicated. Uses the original to create a new superimposed viewpoint.
- Add to: Perspectives View List:

₩

- Add to: Parallel Views list
- Add to: Panorama list
- Add to: VR Object List

Depending on option selected, adds current view from Perspectives to Parallel Views, Panoramas, or VR Objects.

- Edit Light Activated With This Viewpoint:

 Choose a light. The inspector palette switches to Lights mode and the light is selected.
- Edit Heliodon Activated With This Viewpoint:
 The inspector palette switches to Heliodons mode and the heliodon is selected.
- Delete: The viewpoint is removed from the list.

Working with Light Animation in 2D View

2D View Window:

Path edits are clearly distinguished from keyframe edits.


This concerns the paths for cameras, lights, and objects as well as the relevant pop-up menus.

Editing Paths




The light path is in yellow.

Use the *Edit Path* tool in the window bar to select the mode.

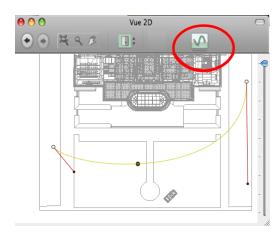

Button pressed: Path editor is active (As a result, editing the keyframe in the view is inactive).




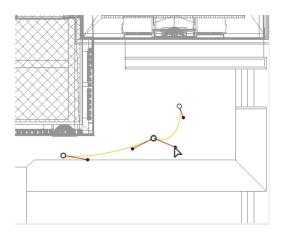

Button raised: Keyframe editor is active (As a result, the path is visible but cannot be edited).



Create Path

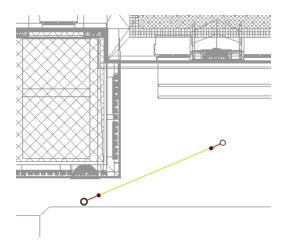

- In mode, move the light source.
- This draws a yellow path in a straight line.
- White dots circled in gray indicate start and end points that have tangents.
- The tangent handles are indicated by red dots circled in black.


Move Path

• Click on the path and move it.




Editing the Path


• Use the handles to graphically edit the tangents.

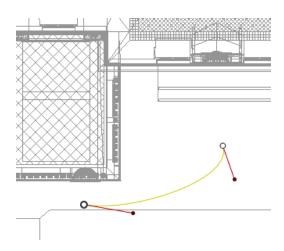

Add a Control Point

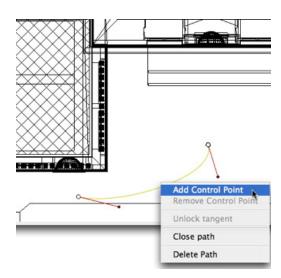


• Right clicking on the yellow path line and selecting "Add Control Point" displays a gray circle and a tangent with two editing handles.

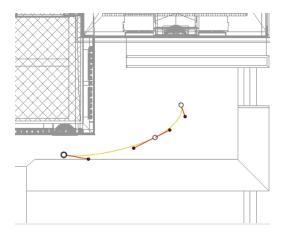


Result.

₩

To edit a portion of the tangent at a point:

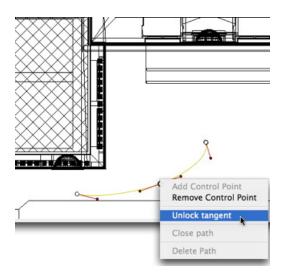


• Right click on the point or on an "Unlock Tangent" item handle to create an inflection point in the path.

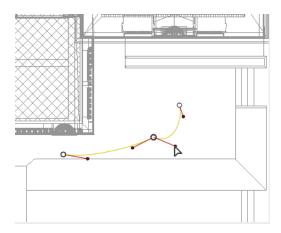


Result.

To delete the inflection point

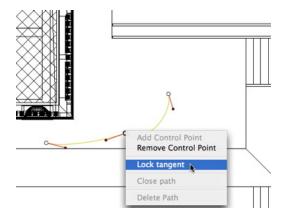

• Select "Lock Tangent".



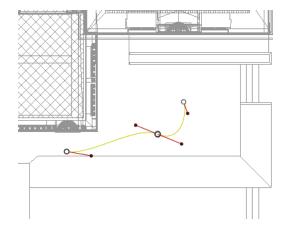

Result.

Extend Path

Extends the path without touching the existing animation.

• *Alt*+Click on the last control point created for the path.







NB: The timeline can be used to play the sequence at any time.



Path Edit Pop-up Menu

• Right clicking on the yellow path displays a pop-up menu with the following options:



- Add Control Point: adds an editable point to the path.
- Delete Control Point: deletes the point from the path (except the end points).
- Close Path: closes the path on itself.
- Open Path: re-opens the path.
- Delete Path: deletes the path.
- Right clicking on a control point or tangent handle displays a pop-up menu with the following options:



- Lock Tangent: to delete an inflection point.
- *Unlock Tangent*: to create an inflection point. This makes it possible to create an inflection point to manipulate sections of the tangents independently.

Editing Keyframes




NB 1: You must be in record mode in order to edit in the Timeline.

Keyframe Edit Pop-up Menu:


- Add Keyframe: adds a keyframe.
- Delete Keyframe: deletes a keyframe.

Adding a key image

- In mode, button is raised (not active).
- In the <u>Timeline</u> window, click on record in 2D view, right click the path, select "Add key frame" from the pop-up menu.

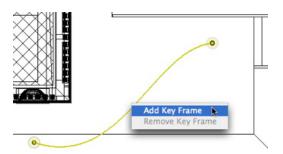



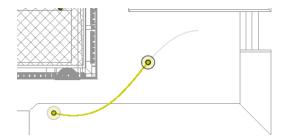

This creates the keyframe.

The keyframe can be moved graphically on the path, making it possible to speed up, slow down, etc.

NB: A keyframe selected in 2D View appears with a red pin on the <u>Timeline</u>. A pause can be created in the movement of the element by duplicating a keyframe in the Timeline.

NB 2: When editing or reading a sequence, the <u>Preview window</u> displays the content in OpenGL Navigation mode if "Automatic Switch to OpenGL" has been checked in the preferences.

Keyframe Edit Pop-up Menu:

This displays and/or hides paths in order to improve editing in 2D View.

• Right clicking on the white background of the 2D window displays the following pop-up menu that makes it easier to edit in 2D View, as well as display and hide paths.



- Show All: displays all camera, light and object paths.
- Show Only Current Type Elements: Depending on which inspector is active (Animations, Lights or Objects), displays all camera, light or object paths.
- Show Only Current Element: displays only the path currently being edited.


Working with Object Animations in 2D View

2D View Window


Path edits are clearly distinguished from keyframe edits.

This concerns the paths for cameras, lights, and objects as well as the relevant pop-up menus.


Editing Paths




Object path is in green.

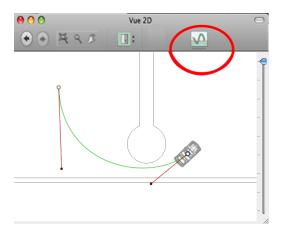


- Use the *Edit Path* tool in the window bar to select the mode.
- Button pressed: Path editor is active (As a result, editing the keyframe in the view is inactive).
- Button raised: Keyframe editor is active (As a result, the path is visible but cannot be edited).

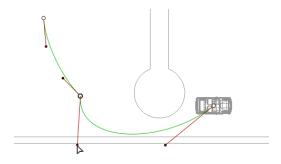

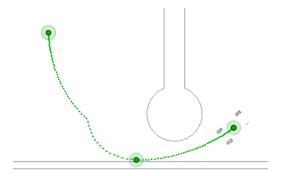



Create Path

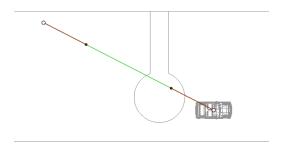

In mode, move the object.


- White dots circled in gray indicate start and end points that have tangents.
- The tangent handles are indicated by red dots circled in black.

This draws a green path in a straight line.

Move Path


• Click on the path and move it.

Editing the Path

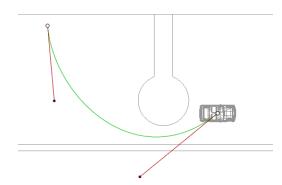


• Use the handles to graphically edit the tangents.

Add a Control Point

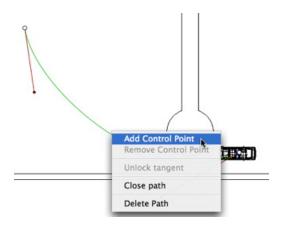


• Right clicking on the green path line and selecting "Add Control Point" displays a gray circle and a tangent with two editing handles.

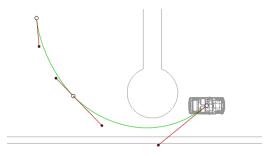


Result.

To edit a portion of the tangent at a point:

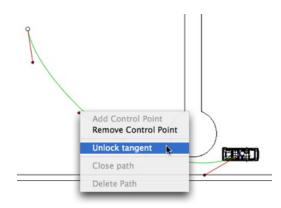


• Right click on the point or on an "Unlock Tangent" item handle to create an inflection point in the path.

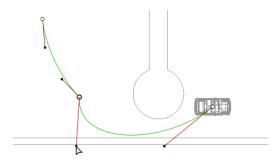


Result.



To delete the inflection point:

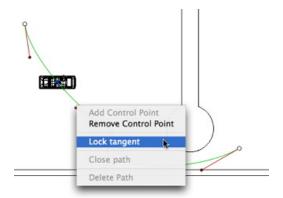


• Select "Lock Tangent".

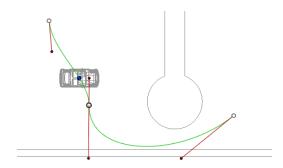

Result.

Extend Path

Extends the path without touching the existing animation.



• *Alt*+Click on the last control point created for the path.





Result.



NB: The timeline can be used to play the sequence at any time.

Path Edit Pop-up Menu

- Right clicking on the green path displays a pop-up menu with the following options:
 - Add Control Point: adds an editable point to the path.
 - Delete Control Point: deletes the point from the path (except the end points).
 - Close Path: closes the path on itself.
 - Open Path: re-opens the path.
 - *Delete Path*: deletes the path.



- Right clicking on a tangent handle or control point displays a pop-up menu with the following options:
 - Lock Tangent: to delete an inflection point.




or

■ *Unlock Tangent*: to create an inflection point.

After unlocking the tangent, you can create an inflection point to work independently with half tangents.



Editing Keyframes



Object path is in green.




NB 1: You must be in record mode in order to edit in the Timeline.

Keyframe Edit Pop-up Menu:


Right clicking on the green path displays a pop-up menu with the following options:

- *Add Keyframe*: adds a keyframe.
- *Delete Keyframe*: deletes a keyframe.

Add a keyframe

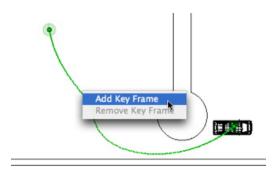

- In mode, button is raised (not active).
- In the <u>Timeline</u> window, click on record in 2D view, right click the path, select "*Add key frame*" from the pop-up menu.

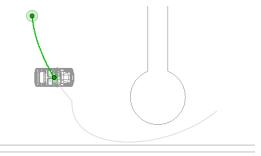

This creates the keyframe.

<>>


The keyframe can be moved graphically on the path, making it possible to speed up, slow down, etc.

NB: A keyframe selected in 2D View appears with a red pin on the <u>Timeline</u>. A pause can be created in the movement of the element by duplicating a keyframe in the Timeline.

NB 2: When editing or reading a sequence, the <u>Preview window</u> displays the content in OpenGL Navigation mode if "<u>Automatic Switch to OpenGL</u>" has been checked in the preferences.

The 2D View Edit Filters Pop-up Menu:

Right clicking on the white background of the 2D window displays the following pop-up menu that makes it
easier to edit in 2D View, as well as display and hide paths.



- Show All: displays all camera, light and object paths.
- Show Only Current Type Elements: Depending on which inspector is active (Animations, Lights or Objects), displays all camera, light or object paths.
- Show Only Current Element: displays only the path currently being edited.

Editing the Clipping Box


This is a blue box with corner handles that can be edited.



- Activation and display in Viewpoint inspectors: <u>Perspectives</u>, <u>Parallel Views</u>, Panoramas, VR Objects and Animations.
- Entering an angle value in degrees in the numeric field pivots the box within the plane.

In 2D View

Change the view (above, front, right, left or back) to define more than one clipping plane in the space (up to a maximum of six clipping planes).

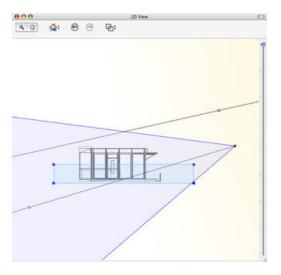



• Edit the blue handles to define the clipping planes.

Elements outside the blue box are excluded from the scene.

When viewing from above, the rotation angle can also be defined graphically in 2D View.



NB: When elements are clipped, the shadows projected are adapted.

Preview Representation

Example of a clipping box in Perspective view.



Inactive Clipping Box




Active Clipping Box

The Preview Window

The main working window. It displays the final rendering in real time before any calculation is initiated!



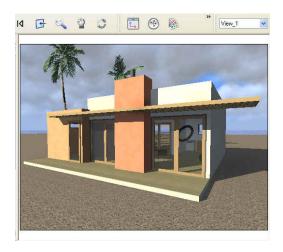

Both the toolbar commands (Navigation, Zoom, Pan and Front View) and the Keyboard and Mouse Shortcuts specific to the Preview window are used to navigate within a scene.

Preview Display and Navigation Tools

Customizing the Preview Toolbar

Preview Display and Navigation Tools



Grouped by topic

Navigation tools:

Show/hide navigation bar in the project:



Activates and deactivates display in *OpenGL mode*. Useful for navigating within large databases.



Pan To: Positions the camera perpendicular to the surface clicked.

Back: Resets the camera to the position defined when the view was activated.

Zoom: Moves the camera (the zone in question is defined by a rectangle). The Alt+Zoom option moves the camera backwards.

Pan: Pans the scene by moving the active camera.

Update: Saves the viewpoint position (viewpoint, target, focus distance and camera roll). This tool only works when the **Automatic Update** option is not activated in the General Preferences.

Artlantis tools:


Display/hide the following toolbars:

Displays the **2D View** window.

Catalog: provides access to Catalogs and Media (Shaders, Objects, Images and Postcards).

Render: Opens the dialog box for preparing and launching rendering.



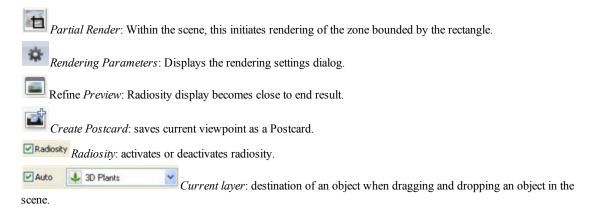

• If Auto is checked:

Drag and drop an object in the scene, this object will go into the layer appropriate to its type or into the active layer if there is no default destination layer for this object type.

• If Auto is unchecked:

The popup menu for the layer shows the destination layer for an object during a drag-drop in the scene as long as there is no default destination layer for this object type.

Viewpoint selector:

Show/hide the viewpoints drop-down menu bar:

00 Navigation Navigation in viewpoints.

Show/Hide Tool Group in the toolbar

• Right click on the toolbar, then choose an item:



Customizing the Toolbar

SpaceNavigator Peripheral Compatibility:

Ergonomics: hardware compatibility with <u>SpaceNavigator</u> from 3D Connexion, a 3D navigation tool.
 Lets you navigate through the scene and edit items in the scene using the mouse.

Customizing the Preview Toolbar

From Display menu > Toolbars > Customize...



To add or delete tools, select them from the "Available toolbar buttons" column or under "Current Toolbar Buttons".



NB: if the Artlantis toolbar is not displayed, it is not possible to customize the preview toolbar.


The Timeline Window

Introduction:



Animation work is done using the Animations, Lights, Heliodons or Objects and the 2D View, Preview window and the Timeline window.

The timeline enables the user to record, edit and play a scene. The scene is made up of sequences that are managed in the Animations Inspector list.

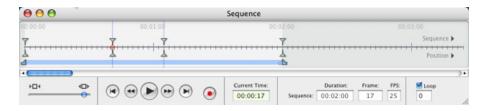

Display

Activating the Animations inspector displays the Timeline window.

If the Timeline window closes again, click on the Animations inspector icon or go to Windows > Timeline.

Animating

Artlantis animates practically all commands relating to the inspectors:

- Cameras (animations)
- Lights
- Heliodons
- **Objects**
- Animated Textures

Begin as follows to animate the parameters for cameras, lights, heliodons, objects and animated textures:


- 1. Activate the Animations Inspector, then
- Activate the Light, Heliodons, Object or Shaders inspector

Comment: The Timeline window will remain open to enable you to edit animation times.

NB: In 2D View, the Timeline and the appropriate inspector must remain open in order to create and edit animated paths for lights, objects or cameras.



The Timeline window is divided into the following four areas:

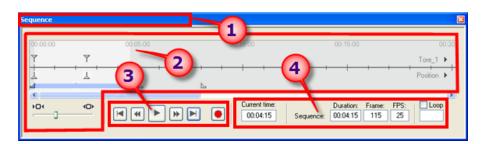

- 1. Title Bar: Shows the name of the current sequence.
- Time scale: Gives duration of the scene with a slide bar and cursor for positioning and editing keys and sequences.
- 3. Recorder: Controls recording and playback of animations.
- 4. Sequence Duration Control: Used for editing the duration and rate of images.

Title Bar



Name of the current sequence, as defined in the animations list. The timeline updates relative to the current sequence (blue band). The other sequences in the scene (gray bands).

Time scale



The slide bar is the time scale that shows the total time in the scene. The time runs from left to right.

The cursor shows the current scene time at instant T.

NB: The current position also displays in 2D View, if the element is animated on a path. Click and drag to move the cursor. The cursor is blue. When a keyframe passes, it sticks to the pin and becomes red.

The cursor moves away from it when:

- The time is edited
- The current sequence is played.
- The mouse wheel can be used to zoom on the scene when rolling over the time scale.

Time scale zoom cursor: Enables the user to show the entire scene or focus on just a portion of it.

Current sequence: The sequence is delimited by its start 4 and end pins.

 The start, end or duration of the sequence can be modified by clicking and dragging the pins to change them individually. The entire sequence can be moved without changing the duration by clicking and dragging it
on the blue line.



A tooltip with a yellow background indicates the current position in min: sec: on the Timeline.

NB: The keyframes and guides do not follow the movement. Subsequently, the numeric Time and Duration fields are updated.

The top of the time scale indicates the events that relate to an animated element.

The bottom of the time scale shows the events relating to one of the values for the animated element in question.

Selecting keys of an animated element.



• Right clicking above the slide bar: displays the keys of an **animated element**, and selects one of the elements.

Consequences:


- All animated keys corresponding to the element in question display on the slide bar.
- The inspector corresponding to the element becomes the current inspector, enabling the user to edit its parameters rapidly.

NB: The user can also access the animated element by clicking on the triangle located in the upper right-hand section of the window (above the slide bar).



Selecting keys of the current animated element.





Right clicking below the slide bar: Displays the animated settings for the current element.
 The sub-keys matching the setting appear below the slide bar.

Result:

All sub-keys corresponding to the parameter for the element in question appear on the slide bar.

NB: The user can also access the animated parameter by clicking on the triangle located in the lower right-hand section of the window (below the slide bar).



NB: In order to select the parameter for an animated element, you must first select the element and then select the parameter.

Recorder




- This enables the user to navigate in time through the scene, and to play or stop playback of the sequence. The cursor moves as a result.
- Description of buttons from left to right:
 - Go to start of sequence
 - Go to previous image
 - Play or stop sequence
 - Go to next image
 - Go to end of sequence
 - Record animations: starts or stops
 the recording.

NB: Sequence playback can be started or stopped by pressing the space bar.

Sequence Duration Control





Current time of the scene: indicates the cursor's current position in the time scale. Expressed in: minutes: seconds: image number. Entering a value updates the position of the cursor. Dragging the cursor updates the scene time again.

Duration of the current sequence: oo:10:00 indicates the duration of the sequence between the start and end pins. Expressed in: minutes: seconds: image number. Entering a value updates the position of the end pin. Dragging the pins updates the sequence duration.

Current sequence image: displays the number of the current image. Entering a value positions the cursor on the time line.

FPS:

FPS: (frames per second), rate at which images are played per second Entering a value updates the number of frames played.

Loop: Indicates that the sequence will be repeated _____. Type in a value to specify the number of loops. The loop will be applied only to the current parameter of the current animated element.



Keyframes: appear as colored guides distributed throughout the time scale.

A pin represents a particular animation event at an instant T. A camera, light, heliodon or object element for which one of the position, rotation, scale, etc. parameters has been modified.

Animation is interpreted between two keys.

es: serve as visual markers for synchronizing animated parameters.

- Animations: Makes a sequence or edit of animated elements the current one, whereupon the appropriate inspector displays.
- Shortcut: Right click above the time scale.
- Modification indicator: Shows the type of animation attached to the current element (position, rotation, lighting power, atmosphere, etc.). Updates depending on which item is selected in the Animations pop-up. Shortcut: Right click below the time scale.

Keyframes and Guides

Keyframes

A keyframe indicates a particular event at an instant T in the scene. Keyframes are linked to the following animated elements: cameras, lights, heliodons, objects and animated textures.



Current animated elements at an instant T: Cameras, lights, heliodons, objects and animated textures.

Animated setting for current element:

Camera: position, rotation, focal, etc.

Light: position, state, type, power, color, etc.


Heliodon: date, time, etc.

Object: position, rotation, scale, etc.

Animated texture: plays the avi or mov sequence.

Animation is interpreted between two keys.

How Keys are Represented



General Information:

- Upper pin indicates a key relative to the current animated element.
- Lower pin indicates that an animated setting of the element is current.

Pin	Description
7	An animated element with edit setting activated (in key). Keyframe not selected (gray).
7	An animated element with edit setting deactivated (no sub-key). Keyframe not selected (gray).
<u>Y</u>	An animated element with edit setting(s) activated. Keyframe selected (red).
Y	An animated element with edit setting deactivated (no sub-key). Keyframe selected (red).
<u>Y</u>	An animated element. Synchronized editing of animated settings for the element in question. Represents overlap of at least two keyframes.
¥ 1	More than one synchronized animated element. Move the yellow pin and the superimposed keys follow. Keyframes selected (red). Moving the cursor over a synchronized key (yellow pin) displays the name of the current element,
	the position in time and the parameters associated with the element.
Y Y	More than one synchronized animated element. Move the yellow triangle and the superimposed keys follow. Non-selected keyframes.
	Moving the cursor over a synchronized key (yellow pin) displays the name of the current element, the position in time and the parameters associated with the element.
76	More than one animated elements are synchronized. The elements are not standard. Moving the yellow pin with the arrow moves all superimposed keyframes. Non-selected keyframes.
	 Moving cursor over synchronized keys: Displays the information concerning them Moving the cursor over a synchronized key (yellow pin) displays the name of the current element,
	the position in time and the parameters associated with the element.
	00:15:00 00:20:00 00:20:00 00:12:07: Lumière 1, Sequence, Lumière 1_1, Bench_01_1



Selecting keys of an animated element.



- Right clicking above the slide bar: Enables you to select an animated element.
- Consequences:
 - All animated keys corresponding to the element in question are displayed on the slide bar.
 - The inspector in question becomes the current inspector, enabling the user to edit its parameters rapidly.

NB: The user can also access the animated element by clicking on the triangle located in the upper right-hand section of the window (above the slide bar).



Selecting keys of the current animated element.



- Right clicking below the slide bar: Displays the **animated settings** for the current element. The sub-keys matching the setting appear below the slide bar.
- Consequences:
 - All sub-keys corresponding to the parameter for the element in question appear on the slide bar.

NB: The user can also access the animated parameter by clicking on the triangle located in the lower right-hand section of the window (below the slide bar).



NB: In order to select the parameter for an animated element, you must first select the element and then select the parameter.

Creating keys

Three options:



- 1. Upon <u>creating a trajectory in 2D View</u>: two keys are created in the Timeline window one at the start and one at the end of the sequence.
- With record mode turned on in Timeline, right click on the path for the "Add Keyframe" pop-up menu (valid only for one path).
- 3. In the Timeline window with record mode turned on, edit a parameter of the current element.

NB: When an element is no longer animated, turning on record mode will create two key images. The one located at the start of the sequence assumes the parameter value before the modification. The second one located in current time assumes the post-modification parameter value.

If the parameter of an element already has keyframes, the record mode creates a single keyframe. This keyframe is located in the current time and has the post-modification parameter value.

 $\stackrel{\longleftarrow}{}$ **NB**: Turning on **record mode** in the Timeline window forces the 2D View to appear when editing key-frames.

Cursor pop-up menu:

Right click on the cursor (blue or red bullet icon).

1. Add Keyframe:

Position the cursor on the Timeline.





• Right click on the cursor to choose *Add Keyframe*.



Result: The keyframe is added.

2. Delete a Keyframe



• Right click on the keyframe and choose *Delete Keyframe*.

₩

Keyboard Shortcuts

1. Move a Keyframe:

• Click and drag the pin.

2. Duplicate a Keyframe:

 Alt+Click and drag the pin. (Both keyframes have the same value. Hence, they can freeze a parameter at a given time.)

3. Moving a set of keyframes for an element (either the camera, lights, heliodon or objects):

Shift+Click/Dragging the pin results in: all pins to the right of the click moving in a proportional time.

Guides:



These serve as visual Timeline tags (blue vertical line).

Enables the user to synchronize more than one animated element (e.g.: moving a camera must match the same instant T as opening a door) or to synchronize animated settings tied to the same element.

- Creating a Guide: Double clicking in the Timeline (not on the slide bar) causes a vertical blue line to appear .
- Deleting a Guide: Double clicking on the vertical blue line makes it disappear.
- Moving a Guide: Drag and drop.

NB: Moving the cursor on the slide bar near a blue guide magnetizes the cursor. This makes it easier to synchronize parameters among several animated elements.


1. Add Guide at the cursor

Position the cursor on the Timeline.





• Right click on the cursor and choose the *Add Guide* item. Double clic in the Timeline near the cursor will also add the guide for the cursor position.



The guide is created.



2. Deleting a guide at the cursor



• Right click on the cursor and choose the Add Guide item. You can also double click the guide.

The Perspectives Inspector

Manages viewpoints defined by a camera, a target and a focal length. Each viewpoint is considered to be an independent document with its own parameters which can receive its own environment:

In this chapter you will learn about the following subjects:

The Perspectives List	. 88
Foreground Images	. 89
Background Images.	90

Viewpoints List: for handling viewpoints displayed on the list.



1. Camera: settings, check elements to activate.

- Focal Length: by using the cursor or entering a value (Change the camera angle). The units depends on the preferences settings.
- Depth of Field: click then, in the Preview window, click to define the clear point of the scene, with the rest remaining blurred. The cursor adjusts the blur amount.
- Clipping Box: for defining clipping planes.
- Show: In 2D View
- Activate: Preview Representation

2. Lighting: To handle light schemes linked to the view, select them from the drop-down menus.

- Heliodon: links a heliodon to the view. Selecting "None" deactivates the heliodon.
- Light Group: links one or more light groups to the view. Selecting "None" deactivates the light groups.
- Neon Shaders: Links one or more Neon Shaders to the view. Selecting "None" deactivates the lighting.
- 3. Visible layers: check them in the drop-down menu.
- 4. Environment: handles the background and foreground of the scene.
 - Defining a background: Background type: 3D Sky, Gradient, 2D Image, 3D Image, 3D Cubic
 - Foreground Images



• <u>Site insertion tool</u> automatically sets the camera with a background image. Clicking opens the dialog.

5. Coordinates:

- Camera XYZ Position.
- Target XYZ Position. Clicking on locks them and clicking on unlocks them.
- It is possible to limit a camera's target to an object's movement: In Object mode, right click on and object and select "**Define As Target**" in the drop-down menu. Then, in Perspectives mode select the name of the object in question in the *Target on* menu.
- Camera Roll: Pivots camera laterally. Turn the circular cursor or enter a value in degrees in the related field

6. Post-production

• Applies effects to the current viewpoint: The effects combine with and between the parameters set in the inspector.

7. Rendering Parameters

· Prepares the document for final rendering.

NB: editing the scene information such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

The Perspectives List

opens the viewpoint list. Each is displayed by name and preview thumbnail. To edit, double-click on the name.





List drop-down menu

• Right-clicking on a view displays the pop-up menu:





Duplicate: Uses the original to create a new superimposed viewpoint.

Delete: The viewpoint is removed from the list.

Add to Parallel Views List:

Add to Panorama list:

Add to VRObject List

Add to Animation list

Depending on option selected, adds current view from Perspectives to Parallel Views, Panoramas, VR Objects or Animations.

Edit Heliodon: The palette inspector switches to Heliodon mode and the heliodon is selected.

Edit light: select a light, the inspector palette switches to Lights mode and the light is selected.

Foreground Images

Defining a Foreground



A double click opens the search dialog for image files.

Loading Foreground Images

- By dragging and dropping into the inspector's Foreground image area.
- Using the Foreground image dialog: double click in the image zone.

NB: The foreground image must have an alpha channel (representing the opacity or transparency of the image); for example, to view the scene through vegetation.

The file formats accepted are Photoshop, TGA, TIFF and PICT.



Background Images

In the local Viewpoints menu:





or

Background	Description
type	
Background	3D Sky:
	In the Viewpoints inspector, the current view is associated with a configurable 3D Sky:
	day/night, type of clouds and cloud density.
Heliodon Sky 🔹	
	This is assuming that the clouds have been associated with the heliodon.
	Clouds — and the heliodon in question has been associated to the current Viewpoint.
	NB: If the viewpoint doesn't have an associated heliodon then the sky is white.
Background	Graduated:
	Three colors that mix linearly. By default, one top color, one middle color and one bottom
	color, with one graduating horizontally towards the other.
Gradient	,
Background	2D Image:
-	Adjusts to the size of the Preview while maintaining its ratio (width x height). Use this option
2D Image	to make an insertion in the site. To move the background image, Ctrl-click on the
	thumbnail and drag the cursor.
	Descriting the image positions double eligit wight on the thumbreil
	Resetting the image position: double-click right on the thumbnail.
Background	3D Image:
. 41	Creating a 3D environment from an image. To move the 3D background, Ctrl-click on the
The state of the s	thumbnail and drag the cursor.
3D Image	
	Resetting the image position: double-click right on the thumbnail.
	NB: Check the left-right continuity of the image being used.
Background	3D Cubic:
1000	Creates a 3D environment from a .mov file comprised of six surfaces of equal size. To move
	the 3D background, Ctrl-click on the thumbnail and drag the cursor.
3D Cubic 🔹	<u> </u>
	Resetting the image position: double-click right on the thumbnail.
	NB: Check the left-right continuity of the image being used.

Loading a Background Image:



• By dragging and dropping into the inspector's

• By using the background image dialog: double-click in the background image area





Deleting a Background Image

• Click within the background image and then use the DEL key on your keyboard. A dialog will appear asking you to confirm the deletion.





NB: the file formats supported are: Photoshop, TGA, TIFF, PICT, BMP and JPEG.



The Parallel Views Inspector

Manages viewpoints defined by a viewpoint, a target and a display width. Each viewpoint is considered to be an independent document with its own parameters which can receive its own environment:

In this chapter you will learn about the following subjects:

The Parallel Views List 94

Parallel Views List: for handling parallel views on the list shown.



1. Parallel views:

- *Type of projection*: Click on Elevation, Top, or Axonometry.
- Camera Roll: Pivots camera laterally. Turn the circular cursor or enter a value in degrees in the related field (available only in Top View).
- Scene width: defines the width of the selected view (current unit).

NB: value modification depends of the ViewPoint Update Mode settings in Preferences.

- Clipping Box: for defining clipping planes.
- Show: in the 2D View
- Activate: Preview Representation.
- 2. Lighting: To handle light schemes linked to the view, select them from the drop-down menus.
 - Heliodon: links a heliodon to the view. Selecting "None" deactivates the heliodon.
 Light Groups: Links one or more light groups to the view. Selecting "None" deactivates the light groups.
 - Neon Shaders: Links one or more Neon Shaders to the view. Selecting "None" deactivates the lighting.
- 3. Visible layers: check them in the drop-down menu.



- 4. Environment: handles the background and foreground of the scene.
 - Defining a background: Background type: 3D Sky, Gradient, 2D Image, 3D Image, 3D Cubic
 - Foreground Images.

5. Coordinates:

- Camera XYZ Position.
- Target XYZ Position.

6. Post-Production:

• Applies effects to the current viewpoint: The effects combine with and between the parameters set in the inspector.

7. Parallel View Rendering Parameters:

• Prepares the document for final rendering.

NB: editing the scene information such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

The Parallel Views List




opens the viewpoint list. Each is displayed by name and preview thumbnail. To edit, double-click on the name.



- adds a viewpoint.
- deletes it.

List drop-down menu

• Right-clicking on a view displays the pop-up menu:





- Duplicate: from the original, creates a new superimposed viewpoint.
- Delete: The viewpoint is removed from the list.
- Add to Perspectives list
- Add to Panoramas List
- Add to VR Object List
- Add to Animation list

Depending on the option selected, adds current Parallel view to Perspectives, Panoramas, VR Objects or Animations.

- Edit Heliodon Activated With This Parallel View:
 The inspector palette switches to **Heliodons** mode and the heliodon is selected.
- Edit Light Activated With This Parallel View:
 Choose a light. The inspector palette switches to <u>Lights</u> mode and the light is selected.



The Media Catalog


A media enables the project to be dressed by dragging and dropping the thumbnail view onto a scene medium (material, object or background from the Preview window).

In this chapter you will learn about the following subjects:

Catalog Manager.	. 98
Dressing the Scene with Media	99
Postcards	100
Using Postcards	101

Four types of Media: **Shaders**, **Objects**, Images and **Postcards** divided into two categories.

The Media Catalog window is divided into three areas: Favorites, Thumbnails and Preview.

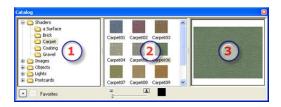

1. Favorites:

• Lists the catalogs, edits catalogs.

2. Thumbnails:

Displays Media thumbnails and adjusts their size.

3. Media Preview

■ Drags and drops Media or Postcard elements to the scene.

NB: Additional samples of Media catalogs are available from Artlantis on DVD or free for download from our site at www.artlantis.com



Catalog Manager

Favorites area



Navigating Media Types

Used to go from one Media folder to another:

• Click on the catalog to be displayed in the favorites area. The Catalog structure is the one on the hard drive.

Adding a Catalog

- Opens the dialog for locating folders.
 - Selecting the Media folder to be added.

Updating Catalogs



Updates the content of a catalog folder whose content has been changed.

• Right click in the favorites area and select "Reload Favorites".

Removing a Catalog

Deletes the selected catalog from the favorites area.

NB: Deleting a folder does not erase it from the hard drive. It is available only at the first level of the hierarchy folders.



Filtering Catalog Media Display



- Click on the local menu of the Display button.
- Select the desired option so that the media type you have selected will not be displayed.

Editing the Size of Catalog Thumbnails


• Change the cursor to display or reduce the size of the thumbnails.


Dressing the Scene with Media

Dragging and Dropping a Media from the Catalog to the Preview Window

In the Media view area, select the desired media and then drag and drop it into the scene over a material, object or background (for only one image). The element that is ready to receive the Media is highlighted when the cursor moves over it.

In this example, we are applying a shader to the wall:

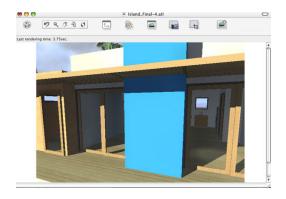

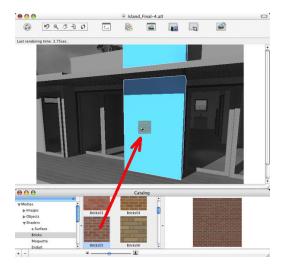





Result

Postcards

Collecting and Organizing Postcards. Collecting a Postcard is equivalent to taking a snapshot of the contents of the current scene at any time, storing all parameters assigned to the materials: Colors, Shaders and textures. The idea is to facilitate recovery of its settings and, if necessary, to be able to quickly send the information it contains to any other user, or from one project to another.

Saving a Postcard

Saves the current view as a Postcard

Tools Menu > Create a Postcard, a dialog box enables the user to name and specify the location where it is saved.

• Clicking on Save stores the Postcard. There is an unlimited number of saves.

NB: Postcards are saved to jpeg format either in a Postcards folder or another folder that you will have to catalog.

NB: Although the Postcard is in jpeg format, editing it with an image touch-up program will cause it to lose Shader and texture-specific information and makes it unusable in Artlantis.

From the Favorites area, navigate to a catalog containing Postcards and select the Postcard in the thumbnail area.

Using a Postcard

In the Catalog Preview area, simply **drag and drop Postcard elements** to an element displayed in the Preview window.

Sending a Postcard

To send Postcards, find the folder on your hard drive where the Postcards are saved.

• Find the Postcard on the hard drive and send it to another computer. To catalog the Postcard, use the *Favorites* area in the **Catalog window**.

In Windows, Postcards are saved in the Postcards folder C:\Program Files\Artlantis Studio 3\Media\Postcards or Artlantis Render 3\Media\Postcards.

Deleting a Postcard


Locate the Postcard saved on the hard drive and delete it.




Using Postcards

Select the Postcard. Drag and drop the attributes of a material (color, Shader, texture) to the receiving material in the $\bf Preview\ window$.


1. Starting scene

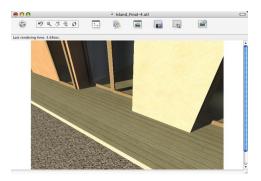

2. Drag and drop

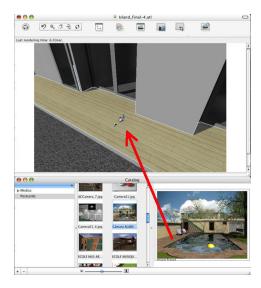

3. Result

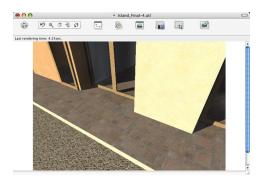



NB: Textures associated with a Shader are maintained and go with the assignment.

When a Postcard includes textures associated with a Shader, once it has been dragged and dropped to a material in the scene, these textures will also be applied.



The Shaders Inspector

Shaders

The following different types of shader are available: <u>Basic Shader, Expert Shader, Realistic Glazing Shader, Luminous Glazing Shader, Neon Light Shader, Realistic Water Shader, Texture, Diffuse Fresnel Shader and Transparent Fresnel Shader</u>

Procedural shaders (formerly Artlantis 4.5 Shaders)

Shaders: Procedural, Mirror, Transparent, Marble, Lines

NB: Shaders can be found in the Media Catalog. Different types of Shaders may have different Shader interface palettes.

NB: Editing the scene information such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

In this chapter you will learn about the following subjects:

Creating a Shader.	103
Materials List	
List Organization.	
Realistic Water Shader.	110
The Neon Light Shader.	111
The Basic Shader.	112
Expert Shader	113
Transparent Fresnel Shader.	114
Diffuse Fresnel Shader	
Shaders: Procedural, Mirror, Transparent, Marble, Lines	116
Luminous Glazing Shader.	117
Realistic Glazing Shader	118
Editing Textures	119
Materials List	119
Texture Mapping	120
Reaffect a Material	
The Materials and Textures Pop-up Menus.	
Material	
Texture	

Creating a Shader

This is done using an existing Shader either:

• from the active Shaders inspector, menu: **Tools** > *Create Shader From...*



• or by right clicking on the name of a From


material and selecting the option $Create\ Shader$


The edit dialog opens with the image of the current Shader. If the current Shader is a procedural, the dialog is empty.



The dialog must be populated with images and values. Do this by dragging and dropping where appropriate or double click on the thumbnail to open a dialog to choose an image.

Once stored, the new Shader will appear as a Standard Shader.

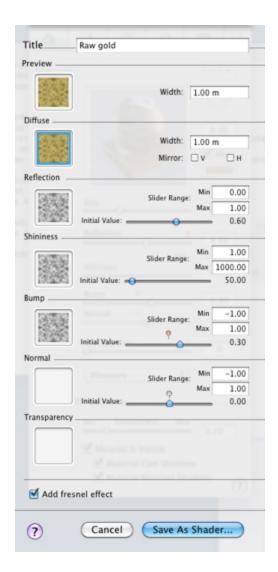

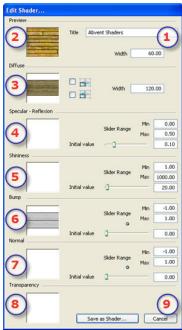



1. Title:

Enter the name of the Shader. This name will appear in the top left of the inspector.

2. Preview

This is the thumbnail that appears in the Shader Inspector and in the thumbnail field of the Catalog. The thumbnail representing the Shader must be a 128 x 128 pixel jpeg file.

The width of the thumbnail gives the size of the image in cms to a scale of 1.

NB: If you do not provide a thumbnail, Artlantis will use the diffuse image resized to 128 x 128 pixels.

Diffuse:

The image must be present. This is the visible part of the Shader. Depending on the pattern, we recommend an image size of 512 x 512 or 1024 x 1024 pixels.



NB: If the image is not square, Artlantis will stretch it to make it square.

The diffuse width gives the the image in cm on a scale of 1.

Depending on the representation, this size may differ from the preview thumbnail. The diffuse image does not necessarily represent the same image as the thumbnail.

NB: The diffuse image represents 4 times the size of the thumbnail image but its pattern is 3 x 3 the size of the thumbnail in order to avoid a repeat effect.

The diffuse image is not visible in the Shaders inspector but displays in the Catalog Preview field.

4. Reflection

The image is optional. It is generally in gray scale but may be in color.

Its size in pixels must be the same as the diffuse image. Otherwise, Artlantis will stretch it depending on the size of the diffuse image.

The purpose of the reflection image is to modify the value of the reflection cursor:

- In black pixels, the slider value is multiplied by 0.
- In white pixels, the slider value is multiplied by 1.
- In intermediary pixels, the slider value is multiplied by the intermediary value.

It is useful to limit the effects of reflection at certain parts of the diffuse image.

NB: The slider is limited to a minimum and maximum value. For example, entering a value of 0.35 will define a slider that will range from a minimum of 0 to a maximum of 0.35.

You can test the effects of each of the settings in real time in the Preview window.

5. Shininess

The image is optional and should be in gray scale.

Its size in pixels must be the same as the diffuse image. Otherwise, Artlantis will stretch it depending on the size of the diffuse image.

The Shininess image is used to modify the slider value: Same as Reflection.

6. Bump:

If the Shader has no Bump image, the slider will be available in the Shaders inspector and Artlantis will use the diffuse image to provide bumps. Hence, the bump image will always be available and will use less system memory.

7. Normal:

₩

The image is optional. The colors use strict rules to define the bump simulation. Generally, it replaces Bump, but Artlantis can support both.

Important: It is not simple to create a "Normal" image. If the Shader has no Normal image, the slider will be disabled in the Shaders inspector.

8. Transparency:

The image is optional and should be in grayscale.

It is used to simulate holes and transparencies in the Shader.

- In black pixels, the Shader is opaque.
- In white pixels, the Shader is transparent.


9. Add Fresnel Effect:


If checked it adds to the created Shader the Fresnel Transition cursor

10. Save Shader as:

Opens the save dialog.

Create Shader and Shader Interface Match:

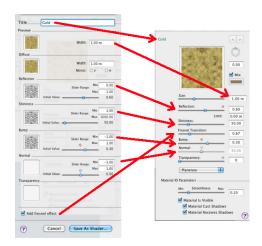

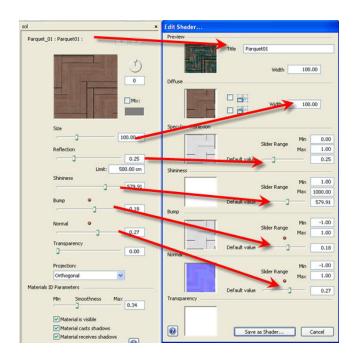



Some Basic Shader settings are not available in Create Shader: Rotation, Mix Color, Transparency, Projection Options, and Materials Identifiers have default values.

Materials List

Opens/clo

Opens/closes the list of Materials.

They are displayed by name. To edit, double-click on a name.



Toolbar:



- Creates a new material based on the material selected.
 - The material created appears at the end of the Materials List (before the Object Materials). The textures linked to the duplicated material are also duplicated.
- Add a texture to the selected material. Select a TGA, JPEG, BMP, PICT, PNG, TIFF, EPIX, Photoshop, MOV, AVI, or MPG file.
- Delete the selected material or the selected texture linked to a material. Activates when the material is not associated with the geometry. *Shortcut*: Hit the *Back* key.
- Enables the user to Reaffect a Material.

List Organization



1. Material

Names of Materials in the scene are listed in alphabetical order and followed by the name of the Shaders.

2. Ground Material

This is the material applied to infinite ground (Scene Information). It appears at the top of the materials list.

3. Scene

Clicking on the Scene tab opens/closes the listed materials that are specific to the scene or internal component.

4. Object Name:

Clicking on the Object tab opens/closes the list of Materials with Shaders and Textures linked to the object in question.

5. Material Name

When the material is assigned, the name is written in black.

6. Shader Name

Follows the two full stops of the material name.

7. Texture Name

Follows the material or Shader name.

You can use drag and drop to re-arrange the order in which textures associated with a material are mapped. Dragging and dropping one texture to another makes it dependent. This enables you to move them at the same time.

8. Newly created materials not associated with geometry

The material name is shown below the listed materials.

9. Object Instance Name

The Object Instance is made up of several materials

The user can drag and drop a Shader onto a material in the list.

The Copy/Paste shortcuts can be used within this list.



NB: Limitations - in an ATL reference file, any material that has been renamed or re-assigned will not be recognized by the "Use Reference File..." command.

Here, we recommend that you go back to your modeler to distinguish the material names and then, if your modeler allows it, update the atl file or use the "Use Reference File" function.

Realistic Water Shader

Materials List: displays the materials of the scene.



1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Transparency

4. Reflection, Shininess

Gives a reflective appearance to the material.

May be used in conjunction with the color from *Diffuse*, *Transparency* or both. Drag the slider to make the material reflect its environment or enter a value in the related field. The reflection intensity is managed using gray scale values or RGB values from 0 to 255. Click on the selector to choose a color.

Entering a Limit value defines the maximum distance of the reflection.

5. Fresnel Transition

6. Water surface:

Wave size: Drag the cursor to adjust the wave amplitude or enter a value in the related field. The wavelength value can be from 0 to 500.

Flatness: Drag the wave amplitude cursor or enter a value in the related field.

7. Animation settings:



Allows the user to automatically adjust the moving water effect which will only be visible in sequence animation mode. If the box is unchecked, the movements are suspended.

Allows the user to animate the water movement speed. Values from 1 to 3.

8. Material ID Parameters:

Use the slider to choose the smoothness level for the material.

9. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.

The material either receives shadows or it does not.

10. Shader/Textures Navigator:


For a material, this makes it possible to navigate between related Shader and Textures editors.



NB: effect only in Artlantis Studio in animation mode

The Neon Light Shader

Materials List: displays the materials of the scene.

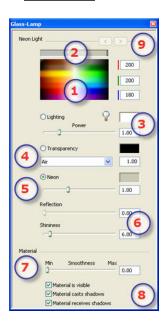

1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Lighting Power:

Drag the slider to change power or enter a value (from 0.1 to 5000) in the related field. Click to choose a color from the system color picker.

4. Transparency

5. Neon:

Drag the slider to adjust the neon power or enter a value in the related field. Click on the selector to choose a color.

6. Shininess



7. Material ID Parameters:

Use the slider to choose the smoothness level for the material.

8. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.

The material either receives shadows or it does not.

9. Shader/Textures Navigator:

For a material, this makes it possible to navigate between related Shader and Textures editors.

The Basic Shader



Materials List: displays the materials of the scene.



1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Diffusion Color:

Another way to select a color is to click to choose a color from the system color picker.

4. Reflection, Shininess

Reflection: Drag the slider. When the diode is red, the material reflects its environment or enter a value in the related field. Click on the diode to cancel the command.

Limit: Entering a Limit value defines the maximum distance of the reflection.

5. Transparency

6. Material ID Parameters:

Use the slider to choose the smoothness level for the material.

7. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.

The material either receives shadows or it does not.



8. Shader/Textures Navigator:

For a material, this makes it possible to navigate between related Shader and Textures editors.

Expert Shader

Materials List: displays the materials of the scene.



1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Diffusion Color:

Another way to select a color is to click to choose a color from the system color picker.

4. Reflection, Shininess

Gives a reflective appearance to the material.

The reflection intensity is managed using gray scale values or RGB values from 0 to 255. Click on the selector to choose a color.

Entering a Limit value defines the maximum distance of the reflection.

5. Transparency

6. Neon:

Drag the slider to adjust the neon power or enter a value in the related field. Click on the selector to choose a color.



NB: Neon color does not emit light.

7. Material ID Parameters:

Use the slider to choose the smoothness level for the material.

8. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.



The material either receives shadows or it does not.

9. Shader/Textures Navigator:


For a material, this makes it possible to navigate between related Shader and Textures editors.



NB: Before editing a color, click on the button associated with the command.

Transparent Fresnel Shader

Materials List: displays the materials of the scene.

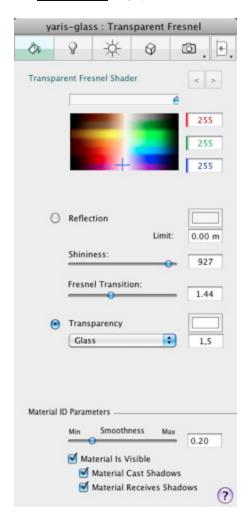

1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Reflection, Shininess

Gives a reflective appearance to the material.

May be used in conjunction with the color from *Diffuse*, *Transparency* or both. Drag the slider to make the material reflect its environment or enter a value in the related field. The reflection intensity is managed using gray scale values or RGB values from 0 to 255. Click on the selector to choose a color.



Entering a Limit value defines the maximum distance of the reflection.

4. Fresnel Transition

5. Transparency

6. Material ID Parameters:

Use the slider to choose the smoothness level for the material.

7. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.


The material either receives shadows or it does not.

8. Shader/Textures Navigator:

For a material, this makes it possible to navigate between related Shader and Textures editors.

Diffuse Fresnel Shader

Materials List: displays the materials of the scene.

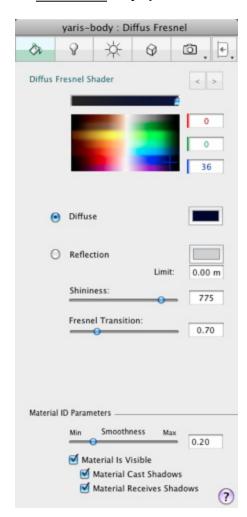

1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.



3. Diffusion Color:

Another way to select a color is to click to choose a color from the system color picker.

4. Reflection, Shininess

Gives a reflective appearance to the material.

The reflection intensity is managed using gray scale values or RGB values from 0 to 255. Click on the selector to choose a color.

Entering a *Limit* value defines the maximum distance of the reflection.

5. Fresnel Transition:

6. Material ID Parameters:

Use the slider to choose the smoothness level for the material

7. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.

The material either receives shadows or it does not.

8. Shader/Textures Navigator:

For a material, this makes it possible to navigate between related Shader and Textures editors.



NB: Before editing a color, click on the button associated with the command.

Shaders: Procedural, Mirror, Transparent, Marble, Lines

Materials List: displays the materials of the scene.



1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Color Picker:

Shader defined by two, three or more colors (e.g. checkerboard).



4. Shininess

Drag the slider to make the material reflect its environment or enter a value in the related field.

5. Roughness:

Moving the slider lets more or less light move on the material.

6. Color Table:

Defines the gradient mode between two colors. The mixture depends on the Shader's geometry. e.g. Checkerboard, Lines, Stone, Marble, etc.

Click on the curve, keep the mouse button depressed and move to redraw the curve.

A horizontal line at the top or bottom of the table indicates that a single color is applied.

A diagonal straight line indicates a regular shading.

Flip: The button turns the Shader around its object.

Scale: Moving the slider adjusts the Shader proportionately.

7. Material ID Parameters:

Use the slider to choose the smoothness level for the material.

8. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.

The material either receives shadows or it does not.

Luminous Glazing Shader

Materials List: displays the materials of the scene.



1. Color Selector:

Click to select a color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Lighting Power:

Drag the slider to increase power or enter a value (values from 0.1 to 5000) in the related field. Click to choose a color from the system color picker.

4. Transparency



5. Reflection, Shininess

6. Material ID Parameters:

Use the slider to choose the smoothness level for the material.

7. Material Characteristics:

The material is visible or invisible.

The material either casts shadows or it does not.

The material either receives shadows or it does not.


8. Shader/Textures Navigator:

For a material, this makes it possible to navigate between related Shader and Textures editors.

Realistic Glazing Shader



Materials List: displays the materials of the scene.

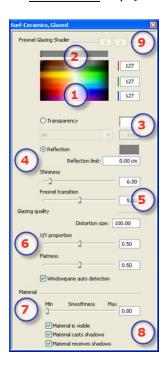

1. Color Selector:

Click to select a diffusion color or enter numerical values (1 to 255) in the RGB fields.

2. Saturation:

Use the slider to choose the color saturation level.

3. Transparency

4. Reflection, Shininess

Entering a Limit value defines the maximum distance of the reflection.

5. Fresnel Transition

6. Glazing Quality:

Allows a discontinuous reflection to be created when there is a break between several surfaces on the same plane. This effect accentuates the realistic effect of reflection on a glazed surface.

Distortion size:

Determines the length of the undulation. Enter a value into the related field.



X/Y:

To orientate the undulation mostly on the X- or Y- axis or both. The slider allows the proportion to be varied. Enter a value into the related field.

Flatness:

Determines the amplitude of undulation. Enter a value in the related field.

Windowpane auto detection:

When checked, finds the limits of a contiguous shape to generate a glazed surface.

7. Material Characteristics:

Smoothness: Use the slider to choose the smoothness level for the material.

8. Shader/Textures Navigator:

The material is visible or invisible.

The material either projects shadows or it does not.

The material either receives shadows or it does not.

9. Shader/Textures Navigator:

For a material, this makes it possible to navigate between related Shader and Textures editors.

Editing Textures

A texture is an image or sequence that is imported onto a material. A material can receive one or more textures.



Applying a texture is done either by:

• Using the Add Texture button in the Shaders inspector



- Right clicking on the name of the material option

 and selecting the Add Texture...
- By dragging and dropping the texture thumbnail from the Catalog to a material in Preview mode or in the list.
- Dragging and dropping the texture from a location on the hard drive onto a material in Preview or in the list.

Deleting a texture is done either by:



Clicking on the button to delete the current texture.

- Using the *Delete background* key.
- Right clicking the name of the texture and selecting *Delete* in the pop-up menu.



Texture Mapping



1. Preview:

Displays the thumbnail of the selected Texture. The blue cross represents the anchoring point of the texture. Clicking in the image repositions this point.

2. Rotation:

Use the circular cursor (Shift + Click, to step every 15°) to turn the texture on its axis or enter a value in the related field.

3. Mix Color:

Check and click on the selector to choose a color.

4. Reflection

Move the slider to change the reflection or enter a value in the related field. When the diode is red, the texture reflects its environment.

Double click on the red diode to cancel the effect.

Entering a Limit value defines the maximum distance of the reflection.

5. Shininess

Use the slider or enter a value into the related field.

6. Ambient:

Use the slider or enter a value into the related field.

7. Bump:

Use the slider or enter a value into the related field to simulate the effect of bumps or hollows on the surface of the material using the levels of gray contained in the image.

Double click on the diode to cancel the effect.

Normal mapping

8. Transparency:

Apply a level of transparency to the texture or enter a value into the related field. Click on the diode to cancel the effect.

Use Alpha Channel: Activates/deactivates the transparency of the alpha channel.



Using a transparency color: Click on the selector to choose a transparency color.

9. Scale:

Button : The texture is automatically adjusted to cover the maximum surface of the material horizontally and/or vertically.

The slider changes the texture scale from 50 to 200% of the current size. Or enter a value into the related field.

10. Dimension, Spacing:

Width/Height:



Enter the size of the texture, clicking on retains the proportions. Click again to cancel the limitation. *Horizontal/Vertical Spacing*:



Used for repeated textures. Defines the size of the spacing between each repetition.

Enter a spacing value as H and/or V. Clicking keeps the same proportions. Click again to cancel the limitation.


Flip: horizontally or vertically inverts the texture with a mirror option between two repetitions.

Horizontal, Vertical repetition: duplicates the texture along the horizontal and/or vertical axis.

Horizontal Mirror, Vertical Mirror: Horizontally and/or vertically inverts each duplication.

11. Projection:

Adjusts the image to the surface on which it is placed. Automatically selects the adjustment best suited to the project.



Planar: is applied to a plane.

Orthogonal: is applied to an element. If the element is composed of surface planes, the texture follows the surface planes.

Horizontal: the Shader is required to be set horizontally.

Vertical: vertical projection on the element. The horizontal parts receive the image while the vertical or tilted parts are stretched.

Spherical: adopts a spherical form that depends on the size of the texture. Hence, it may leave empty spaces.

YCylindric: the texture is projected around the axis of a vertical cylinder.

XCylindric: the texture is projected around the axis of a horizontal cylinder.

UV: maintains the texture coordinates on an object coming from software that manages UV maps.



Planetary: vertical projection of the element while passing through the poles, without leaving spaces.

12. Shader/Textures Navigator:

For a material, this makes it possible to navigate between related Shader and Textures editors.

Reaffect a Material

Use the toolbar to reaffect a material


1. Click on the selection arrow



choose the type of selection in the drop-down menu , by triangles, planes, parallel planes, objects, material or Magic Wand.

0 0

- 2. In the preview window, click on the items you want to reassign with the new material (click again on the selection button to cancel the current selection).
- 3. Click on the "Apply material" button
- 4. Reaffect material dialog box pop-up:

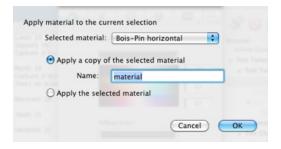

5. Apply material to the current selection

There are two options:

"Apply a copy of the selected material" and "Apply the selected material".


• Apply a copy of the selected material:

Creates a copy of the selected material in the list. By default, the name remains the same as the original one.

• Apply the selected material:

Reaffect the selected material to the selected mesh. It is possible to change the selected material using the drop-down menu.






The Materials and Textures Pop-up Menus


The pop-up menu depends on the name of the material or texture clicked.



Material

• Right-clicking on a material name displays the following pop-up menu:





Create Shader From...

Opens the Create Shader dialog.

Apply to All Instances

Applies the modified material of an object to all identical objects in the scene.

Reset to Default

Applies the original material to the object.

Add Texture...

Open the dialog box and choose a TGA, JPEG, BMP, PNG, PICT, or Photoshop file.

Merge materials with Same Name

Materials with the same name will be replaced by the selected material.

Merge Material with the Same Shader

Materials with different names but having the same shader are grouped under the same name.

Merge Vertex

Merges superposed points of the polygons using this material.

(Avoids the problems of modeled object artifacts whose superposed points are not merged and allow the smoothing of the polygons).

Visible

• If unchecked, the material becomes invisible.



Cast Shadow

If checked, the material casts shadows on the other elements.

Receive Shadow

If checked, the material receives the shadows cast from other elements.

Delete All Unused Material IDs

Clears the materials that are not assigned to the geometry.

Delete

Deletes the selected material.

Split Material by Mesh

From an applied material the command creates into the list of materials as many as materials as meshes found. Example:



NB: Does not delete a material from the original model.



NB: The File > Use Reference File command does not recognize reassigned or renamed materials.

Texture

• Right-clicking on a texture name displays the following pop-up menu:



Delete: erases the related texture.

Merge Texture Origin: upper left, upper right, lower left, lower right, center.

Determines the texture's anchor point. In Preview, the origin is represented by a black cross.

In the thumbnail, the anchor point is represented by a red and white cross.

The Objects Inspector

Used to edit geometry, materials, coordinates, dimensions and animation settings

Editing the geometry from the list

There are two ways of displaying the elements in the scene: by Hierarchy or by Layer

- By Hierarchy allows the user to select the elements making up the scene in view and edit them. See "The Objects Inspector by Hierarchy" page 126
- By Layer allows the attached objects to be ordered by layer. See "The Objects Inspector by Layer" page 128
- Multiple selection.

In the list, the coordinates and dimensions of a multiple selection of objects may be edited at the same time.

NB: Editing the <u>scene information</u> such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

In this chapter you will learn about the following subjects:

The Objects Inspector by Hierarchy.	126
Geometry	126
Object	127
Saving a scene:	127
The Objects Inspector by Layer.	128
Layers	129
Geometry	130
Object	131
Editing the Scene	131
Editing Objects.	133
In the case of a Standard object:	133
Object Animation.	134
Creating an Object from a Scene	134
Selecting Polygons	134
Creating the Object	135
Canceling a Selection	135
The Objects List	135
Billboards	137
Availability:	137
Light Objects.	139
Standard Objects	140
Object Animation.	140
Vegetation Objects.	140
Animated Character Objects	142
Behavior	142
Shader:	143
Coordinates	143
Object Animation.	
Instanced Object	143




The Objects Inspector by Hierarchy

The elements listed represent the geometry of the scene and objects.

The contents of the inspector differs according to which option is selected from a list:

- 1. Scene geometry
- 2. Object added to the scene

Geometry

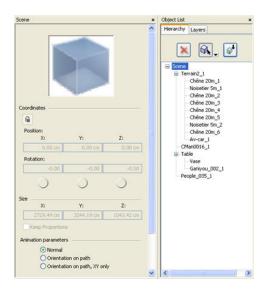

The name of a geometry selected in the list displays its coordinates, dimensions and animation parameters. These parameters may not be edited.




NB: The settings related to the geometry cannot be edited (name, coordinates, dimensions).

• Delete the geometry from the list: does not affect dependent objects





Object

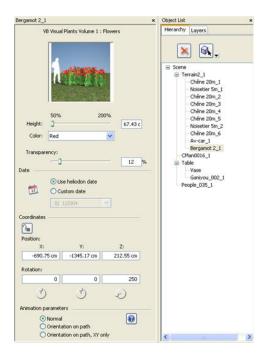

The object settings can be edited as they are independent of the scene geometry.

Geometry pop-up menu selected



When the geometry is selected in the list, right-clicking the layer name displays a popup menu with the following options:

- *Use/Do not use as target*: to define (depending on the activation in the viewpoint inspector) whether a geometry element or an object is suitable for being used as a target for the cameras
- Delete object from the list.



The objects are available in the Media catalog

Object geometry

- 1. Edit Object
- 2. Types of objects: Standard, Light, Vegetation, Animated person and Billboard
- 3. Creating an Object

Saving a scene:

To export a scene as an object, see **Saving an AOF Document**



The Objects Inspector by Layer

Geometry elements are always contained in layers.

The layers come either from the CAD software, or are created in Artlantis.

The Inspector dialog changes according to which option is selected from a list.

There are three selection options:

- 1. Layers
- 2. **Geometry**
- 3. Objects.



Selecting more than one layer enables their visible/invisible status to be changed depending on the viewpoint. Selecting multiple objects enables them to be moved to another layer.

Clicking the name of an object in the list makes its insertion point flash in the Preview window.


Renaming a layer

The name of the layer selected in the list is highlighted, select it to rename it.

NB: In Artlantis, renaming a layer created in the CAD software breaks the link to this layer. In this case, modifications made using the "Use a Reference File..." command will not be recognized.



Layers

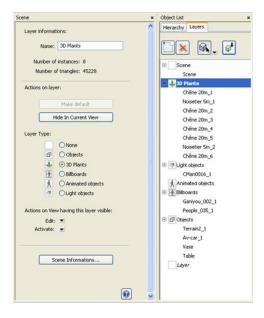

1. Layer data:

name, number of instances contained, number of triangles making up the geometry

2. Actions on layers

• Use by default:

When you click the "Use by default" button, the layer selected becomes the default layer for dragged objects dropped into the scene or objects created from the scene stored there.

• *Hide/Display in the current view*: displays what is necessary for the active viewpoint. Advantage: improves the display and rendering.

3. Layer type:

None, Objects, 3D Vegetation, Billboards, Animated objects, Light objects

When you drag and drop objects into the Preview window, they can be stored automatically in the layers. This is done by telling these objects what their destination layer is beforehand.

When a project is opened, Artlantis always assigns a default layer, its name is displayed in bold. This layer receives any object added into the scene until another layer is declared as the "Default layer".

However, you can automatically associate certain types of object with certain layers

None: by default, the component dragged and dropped into the scene is stored in the layer whose name is shown in bold, except if this type of component has already been associated with a specific <u>Objects</u>, <u>3D</u> **Vegetation**, **Billboards**, **Animated objects** or **Objects with light** layer.

To define a specific layer which is to contain a certain type of component, a new layer must be created in the list or an existing layer chosen, then in *Layer type*, select the type.

Any layer in the list can be chosen. In the list, the symbol concerned will be assigned to the layer icon.

Example: You create a new layer. Then in Layer type, you click on Objects. All components (objects) dragged and dropped will be stored automatically in this layer.

4. Actions on the view containing the visible layer:


Edit: depending on the layer selected, lists only the viewpoints where this layer is visible. In the popup menu, select the name of the view. The Inspector changes to Viewpoint inspector and the selected view is displayed.



Activate: depending on the layer selected, lists only the viewpoints where this layer is visible. In the popup menu, selecting the name of the view activates it without changing Inspector.

5. Scene information: Displays the edit dialog for the scene

Geometry



Right-clicking geometry contained in the layer displays a popup menu with the following options:

- Use/Do not use as target: defines (depending on the activation in the viewpoint inspector) whether a geometry
 element or an object is suitable for being used as a target for the cameras or lights.
- Delete: deletes the selected geometry contained in the layer.
- Move to: moves the geometry to another layer.



NB: The settings related to the geometry cannot be edited (name, coordinates, dimensions).

Object by Layer toolbar



Create a layer

- 1. Create a layer in the layer list. A new layer is added, click on the name of the layer to rename it.
- To delete a selected layer, click
 When the layer contains geometry, a warning dialog offers to transfer the elements in this layer to another via a popup menu or to delete all the elements it contains.

NB: renaming or deleting layers which have been created by the CAD software breaks the link with it when the "Use a reference file..." command is used.

Creating an object

Selected layer popup menu


When a layer is selected in the list, right-clicking the layer name displays a popup menu which lets you:


- Default: define this layer as default
- Hide in the current view: makes the layer invisible for the current view.
- Edit the view containing the layer: the inspector view changes to the Viewpoint Inspector.
- Activate the view which has this layer visible: the view becomes active without changing the inspector.
- Default layer for: defines the default type for this layer: Objects, 3D Vegetation, Billboards, Animated objects and Light objects.
- Delete: deletes the selected layer, then displays the following dialog to move its content.





• Delete all empty layers: deletes all layers which do not contain geometry.






Object

• Types of objects: <u>Standard</u>, <u>Light</u>, <u>Vegetation</u>, <u>Animated person</u> and <u>Billboard</u>
The objects are available in the <u>Media catalog</u>

Editing the Scene

Data related to the whole scene is displayed using a command from the *Window* menu or from the Object inspector in display mode by **Layers**.

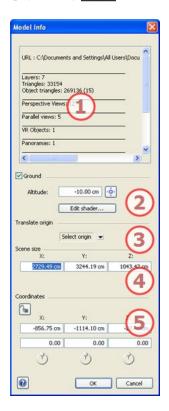



1. Scene Information:

- File location:
- Number of triangles making up the scene,
- Number of triangles making up the objects,
- Types and numbers of viewpoints,
- Structure of Light, Heliodon and Material Groups.

2. Infinite Ground:

- Checking/unchecking activates and deactivates the ground. The ground receives shadows,
 Shaders and objects.
- Click on the *Altitude* cursor. Then, in the Preview window, click on the scene element that will define the height of the ground, or enter a value into the related field.
- Edit Shader selects the Ground Shader and activates Shader edit mode.

3. Transfer the origin of the anchor point:


• Select the location of the new origin of the Scene.




Determine the object entry point (blue ball)

Moves the scene origin.


Center X, Y and below




Center X, Y and above.



Center X, Y



Camera target.







NB: For an .aof the default anchor point can be changed in the 2D view.

4. Scene Size:

Resizes: geometry, objects, cameras, lights, etc. No impact on the size of Shaders and textures. Editing dimensions; if *Keep proportions* is checked, X, Y and Z remain homothetic.

5. Coordinates:

- Model XYZ Position. Enter values in the related fields to move the scene origin.
- Clicking on locks them and clicking on unlocks them.
- Rotation: Pivots the scene along the x, y and z axes.
 Shift+click and dragging the cursor restricts the movement to 15° steps.

Editing Objects

Select an object from either:

- List of Objects
- The Preview Window
- The 2D View window

The inspector palette displays the information.

In the case of a Standard object:



- 1. Preview Thumbnail.
- 2. Edit Shaders...
 - Choose the material to edit from the list, the Objects inspector switches to Shaders mode.

3. X, Y, Z Coordinates

• Position: Provides the x,y,z coordinates for the object's anchor point. Entering new values redefines the position.





NB: For an .aof the default anchor point can be changed in the 2D view.

- Rotation: Pivots the object along the x, y and z axes. Shift+click and dragging the cursor restricts the movement to 15° steps.
- Clicking on locks them and clicking on unlocks them.
- 4. Dimensions: changes the length, width and height settings.
 - Click on the checkbox to maintain the proportions. Clicking again removes the restriction.

5. Animation Parameters:

Object Position: 3 options

Normal: The object always moves parallel to its starting position. (e.g. a vector that always retains its orientation regardless of the object's path).

Orientation on path: The object moves in x, y, z in the direction of the path (e.g. an aircraft performing a loop).

Orientation on path, XY only: The object moves in x, y, z in the direction of the path but always remains parallel to ground level x,y (e.g. a helicopter taking off).



NB: Using the timeline, in a single sequence, the object can change behavior several times.

Object Animation

See "The Timeline Window" page 77 See "Animatable Object Parameters" page 201

Creating an Object from a Scene

From the geometry selected in the Preview window.

Selecting Polygons

Use the toolbar in the object list



1. Activate



- Choose the type of selection in the rials or Object Wizard.drop-down menu, by triangles, planes, parallel planes, objects, materials or Object Wizard.
- 3. In Preview, click on the elements that will make up the object.



4. Activate



NB: for an .aof the default anchor point can be changed in the 2D view.



Creating the Object



The object remains linked to the project but is saved either in the atl document, or in an independent aof file. In this case, the aof file can be used in other projects.

- 1. Name the object
- 2. Create an internal object, or Create an external object (.aof). In this case select the location where it is to be saved.
- 3. Destination layer: choose the layer for the new object.

NB: the geometry used to make up the object no longer exists since it has been converted to an object.

NB: the use of the "Use a Reference File..." command maintains control of the layers except in the following cases when:

in Artlantis:


- the geometry from the CAD or modeler software contained in a layer has been moved to another layer.
- the names of the layers or the geometry contained in the layers have been renamed.

in the CAD or modeler software:

- the layers have been renamed or deleted.

Canceling a Selection

• Click on again.



The Objects List

Opens the list of object groups.

The geometry is displayed either by hierarchy or layer.

- By **Hierarchy** lists the elements of the scene together with the associated objects.
- By Layer lists the geometry of the scene by layer together with the associated objects.






- deletes the selected object (and its dependencies). Double-clicking on the object name edits the name.
 Changing the dependence of an object in the hierarchy is done by dragging and dropping.
- The objects can be placed in a hierarchy so the group of objects can be translated by moving the parent object



Pop-up menu for objects:

• Right-click on the name.



- Define as target: forces a camera to use the object as a target.
 In the list, the object will have a red target in front of it.
 In the Coordinate Viewpoint inspector, select the target object from the drop-down menu. Select target.
- Apply Gravity:
 The anchor point of the object will drop to the surface beneath it.


Coordinates of the Perspective View Inspector:



• The selected object has been created from the contextual menu as explained above.

₩

Multiple selection

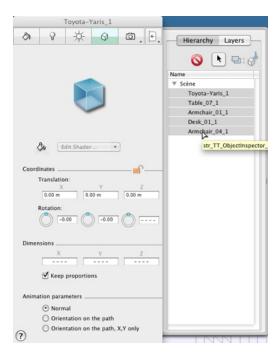

• In the list, the coordinates and dimensions of a multiple selection of objects may be edited at the same time.

Billboards

Billboards are composed of a surface plane and an image.

Availability:

Available in the Catalog Manager, "2D Billboards" folder.



Two types of Billboards

- Vertical, with relation to the ground (People and Vegetation).
- Flat, which lies flat on the receiving surface (Signs and Pictograms).





- 1. Preview Thumbnail.
- 2. Horizontal and/or vertical symmetry.
- 3. Size of the element:
 - Using the slider or by entering a value in the field (to go beyond the limits of the slider, type in a value. The values of the slider will be updated accordingly).

4. Color:

Use the menu to change the color.

5. Transparency:

Used to render a Billboard with greater or lesser transparency depending on the desired level of transparency: values from 0 to 100. 0 means opaque.

- 6. Display: Display Parameters in Preview
 - Brightness: for changing brightness values from -0.25 to 0.25.
 - Contrast: for changing contrast values from 0.5 to 1.5.

7. Coordinates:

Position:

- Provides the x,y,z coordinates for the object's anchor point. Entering new values redefines the position.
- Clicking on locks the coordinates and clicking on unlocks them.
- *X, Y, Z Rotation*: Pivots the object. Shift+click and dragging the cursor restricts the movement to 15° step.
- Check to restrict the billboard to always face the camera.
- 8. Animation Settings¹



Light Objects



- 1. Preview Thumbnail.
- 2. Edit Shaders...
- Choose the material to edit from the list, the Objects inspector switches to Shaders mode.
- 3. Light Objects...
- Choose the light to edit from the list, the Objects inspector switches to Lights mode.

4. X, Y, Z Coordinates

- Position: Provides the x,y,z coordinates for the object's anchor point. Entering new values redefines the position.
- Clicking on locks them and clicking on unlocks them.
- Rotation: Pivots the object along the x, y and z axes.
 Shift+click and dragging the cursor restricts the movement to 15° step.
- 5. Dimensions: for editing the parameters: length, width and height.
- Click on the checkbox to maintain the proportions. Clicking again removes the restriction.
- 6. Animation settings

 \triangleright NB: Using the timeline, in a single sequence, the object can change behavior several times.

NB: A light object's light cannot be deleted from the Lights inspector list. This must be done from the Objects list.


See "The Timeline Window" page 77

See "Editing Paths" page 60

See "Animatable Light Parameters" page 201



Standard Objects

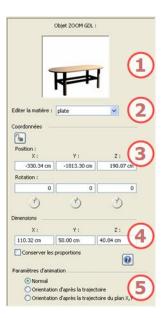

- 1. Preview Thumbnail.
- 2. Edit Shaders...
- Choose the material to edit from the list, the Objects inspector switches to Shaders mode.
- 3. X, Y, Z Coordinates
- Position: Provides the x,y,z coordinates for the object's anchor point. Entering new values redefines the position.
- Clicking on locks them and clicking on unlocks them.
- *Rotation*: Pivots the object along the x, y and z axes. Shift+click and dragging the cursor restricts the movement to 15° step.
- 4. Dimensions: for editing the parameters: length, width and height.
- Click on the checkbox to maintain the proportions. Clicking again removes the restriction.
- 5. Animation settings



NB: using the Timeline, in a single sequence, the object can change behavior several times.

Object Animation

See "The Timeline Window" page 77

See "Editing Paths" page 66

See "Animatable Object Parameters" page 201

Vegetation Objects

Available in the media manager "Free VB Visual Plants Samples" Vol. 1 and 2.



1. Preview Thumbnail.

2. Height:

• Using the slider or by entering a value in the field.

3. Transparency:

Used to render a vegetation object with greater or lesser transparency depending on the desired level of transparency: values from 0 to 100. 0 means opaque.

NB: When the slider is at the end, typing a higher numerical value allows the sizes to go beyond the end. The slider values will be updated accordingly.

4. Representation date:

- Choose: active heliodon date or calendar date.
 - Heliodon date: use the date of the active heliodon
 - Calendar: use the selected date.

5. X, Y, Z Coordinates

- Position: Provides the x,y,z coordinates for the object's anchor point. Entering new values redefines the position.
- Clicking on locks them and clicking on unlocks them.
- Rotation: Pivots the object along the x, y and z axes. Shift+click and dragging the cursor restricts the movement to 15° step.

6. Animation settings

NB: Using the timeline, in a single sequence, the object can change behavior several times.



See "The Timeline Window" page 77

See "Working with Object Animations in 2D View" page 66

See "Animatable Object Parameters" page 201

Animated Character Objects

• Available in the <u>Media Catalog</u>: Exterior, Furniture, Transport, etc.



1. Preview Thumbnail.

2. Rotation:

Pivot the object on itself or enter a numerical value.
 Shift +click dragged using the cursor limits the movement to a step of 15°.

3. Height:

• Using the slider or by entering a value in the field.

NB: When the slider is at the end, typing a higher numerical value allows the sizes to go beyond the end. The slider values will be updated accordingly.

4. Color:

• Use the menu to choose the clothing color.

Behavior

5. Behavior: Use the menu to choose the character's attitude: standing, sitting, running, etc.



Shader:

6. Shader

• Select the material to be edited from the list.

7. Reflection, Shininess, Bump:

- Reflection: drag the slider. When the diode is red, the texture reflects its environment. Double click on the red
 diode to cancel the effect.
- Shininess: drag the slider to make the material become bright or enter a value in the related field.
- *Bump*: drag the slider to apply bump to materials or enter a value in the related field. Click on the red diode to cancel the effect.

8. Mix Color:

• Check and click on the selector to choose a color.

Coordinates

9. X, Y, Z Coordinates

- Position: Provides the x,y,z coordinates for the object's anchor point. Entering new values redefines the position.
- Clicking on locks them and clicking on unlocks them.

Object Animation

See "The Timeline Window" page 77 See "Editing Paths" page 66 See "Animatable Object Parameters" page 201

Instanced Object

Principle: two objects: one table, one vase. The vase is placed on the table. If the table is moved, the vase follows the movement

Instancing an Object



Using drag and drop:

- In Preview to another object
- In the list to the name of an object.
- In the list, the instanced object is shown off-center to the right under the reference object.

Delete a Dependency

• Drag and drop the dependant object to the "Model" name at the top of the list.





NB: The level of instances is unlimited.


The Heliodons Inspector

Manages the calculations for sunshine according to the position of the sun, determined by the place, time and type of sunshine. One heliodon may be associated with one or more viewpoints.

In this chapter you will learn about the following subjects:

City Editor	. 147
The Heliodons List	. 147
Advanced Heliodon Parameters	148

Heliodons List: for handling heliodons on the list shown.

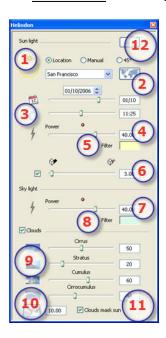

Sunlight:

- 1. Projection of the Sun's rays: Location, Manual or 45°.
- Location: Select a city from the local menu.
- 2. City Editor: edits the list of cities
- 3. Set date and time:
- either by clicking the arrows, editing the date dd/mm/yyyy and time hh:ss, or by moving the associated sliders.
- 4. Sunlight Power:
- Move the slider or type in a percentage value in the field. Clicking on the red diode resets the power to its initial
- 5. Color Filter:
- Click on the color box to modify the color of the light coming from the sky. All elements in the scene receiving projected light will be tinted with this color.



⟨

- 6. Shadows:
- The heliodon can cast shadows. The slider enables you to vary the shadows from hard to soft.

Light from the sky:


- 7. Power of light from the sky:
- Move the slider or type in a percentage value in the field. Clicking on the red diode resets the power to its initial
 value.
- 8. Color Filter:
- Click on the color box to modify the color of the light coming from the sky.



NB: Tints the sky and the elements in the scene.

Clouds:

- 9. Four types of cloud Cirrus, Stratus, Cumulus and Cirrocumulus.
- Move the slider or type a value into the numeric field to vary the size of the clouds.
- 10. Cloud distribution:
- Click on to vary the distribution of the clouds or enter a value in the numeric field.
- 11. Clouds mask sun:
- If the box is checked, the sun remains behind the clouds. The sun rays will not be projected.
- 12. Click to open the Advanced Parameters dialog: pollution, halos, fog.

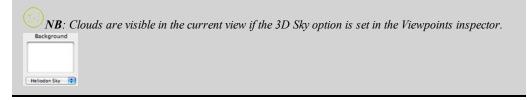

City Editor

Heliodon List

Advanced Heliodon Parameters

NB: editing the scene information such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

Heliodon Animation

See "The Timeline Window" page 77

See "Animatable Heliodon Parameters" page 200



City Editor



World Map

- The chosen city is circled in red. Clicking on the map points to the closest city.
 - *Add* creates a "New City":
 - Double click on "New City" to rename it. Adjust the longitude and latitude parameters.

NB: Alt+click to edit the longitude and latitude of the current city. The mouse wheel provides dynamic zoom capability.

• Delete deletes a city

City

• Lists all cities. Clicking on a name selects this city and the position is instantaneously effective on the world map.

Longitude and latitude

• Geographic position of the current city.

GMT

• Time difference (Greenwich Mean Time).

+ 1 in summer


The Heliodons List



opens the heliodons list. Double-click on the desired name to change it.








adds a heliodon, deletes the selected heliodon.

The heliodons are classified alphabetically, clicking on "Name" at the top of the list modifies the alphabetical order of the classification.

• Right clicking on a heliodon displays the contextual menu:



Delete: The heliodon is removed from the list.

Activate for the Current View: Activates the heliodon for the current view (Name in bold).


Deactivate for Current View: Deactivates the heliodon for the current view.

Edit View Using This Heliodon: to choose a viewpoint, the inspector switches to <u>Perspectives</u> or <u>Parallel views</u>, <u>Panoramas</u>, <u>VR Objects</u> or <u>Animations</u> mode.

Activate View Using This Heliodon: displays the chosen viewpoint in the preview window (the inspector remains in Heliodon mode).

The Cut/Copy/Paste shortcuts are effective for the list.

Advanced Heliodon Parameters

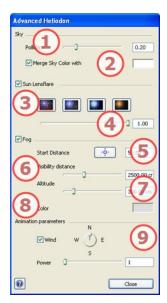

Sky:

1. Pollution factor:



- Move the slider or type in a percentage value in the field.
- 2. Merge Sky Color With:
- Check the box to activate/deactivate the effect. Click the colored box to choose a color. The color is mixed with
 the calculated sky color.
- 3. Luminous halo:
- Check the box to activate/deactivate the effect.
- Choose effect: Click on one of the four thumbnails.
- 4. Halo Power:
- Move the Power slider or type in a value between 0 and 100%.

Fog: set fog parameters

• Check the box to activate/deactivate the effect.



- 5. Starting distance: click then, in the Preview window, click on the point from which the fog will be able to be perceived, or enter a numeric value in the field.
- 6. Visibility distance: visibility distance begins at the starting distance. It provides the fog with a volumetric effect.
- Altitude: Altitude takes effect from bottom to top. It depends upon the starting distance and the visibility distance
- 8. Color: for assigning a color to the fog.

Animation settings:

used to animate the movement of the wind along with its direction.

- 9. Wind
- Check the box to activate/deactivate the effect.
- Movement speed values go from 0 to 100.
- The direction is specified using the circular slider, direction being relative to project North (see 2D view).



NB: Effective only in Artlantis Studio in animation mode



The Lights Inspector

Edit lighting schemes based on viewpoints. Interactive settings and immediate results in the Preview window. Using the appropriate and correctly adjusted light model enhances the work carried out on the materials. Light groups may be attached to one or more viewpoints. The lights are characterized by an illumination limit and a maximum illumination area.


In this chapter you will learn about the following subjects:

Lights List 152



Lights List: for handling lights on the list shown.

Lighting

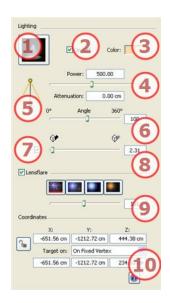

1. Select projection type

determines the lighting projection (fall-off) from 9 predefined types

2. On/Off

3. Color:

Double click to modify the source color.

4. Source power

Values from 1 to 1,000,000. Move the slider to change the power or enter a value.

5. Attenuation Distance

Calculates the attenuation distance for the lighting power.

Between the attenuation distance and source, the lighting power remains constant and at maximum.

The distance beyond distance A corresponds to the gradual diminishing of lighting power at 1/d 2; When the attenuation value equals 0, the light diminishes at 1/d 2; beginning at the light source.

Enter the distance in the numerical field (current unit).

NB: In this area, the illumination principle is based on reality. The closer an object is placed to the light source, the more illuminated it appears.

6. Change the Lighting Angle:



By sliding from 10 to 360° or by typing in a numerical value.

Example: A value of 360° provides an omnidirectional light.

7. Shadow projection

Activate/Deactivate shadow projection: Click on the box to check it.

8. Shadow type

Sharpness slider on the edge of the illuminated area. Values from 0 (diffuse area between the shadow area and the illuminated area) to 100 (straight limit). Accepts a numerical value.

9. Luminous halo:

Activate/Deactivate: Click on the box to check it.

Choose effect: Click on one of the thumbnails:

Halo Power: Move the Power slider or type in a value between 10 and 200%.

10. X, Y, Z Coordinates: of the position of the light source and its target.

Clicking on locks them and clicking on unlocks them.

Activated target: choose between target on a fixed vertex or on an object defined as target.

NB: Editing the scene information such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

Animations:


See "Editing Paths" page 60

See "The Timeline Window" page 77

See "General Preview Display Shortcuts" page 215

See "Animatable Light Parameters" page 201

Lights List





- Double-click on the name of a group or a light to edit the name.
- Moving a light from a group to another group is done by dragging and dropping.
- adds a light group,



- +
 - adds a light at the current camera position if a group is selected. Duplicate the light if a light is selected.
- deletes the selected light or group.

Light Group Pop-up Menu:

• Right clicking on the name of the group displays the contextual menu:



Paste: Pastes the clipboard contents

Delete: removes the selected elements.

Activate/Deactivate for Current View: the group takes part or otherwise in the lighting of the current view.

Edit View Using This Light Group: Choose the view point, the inspector switches to Perspectives or Parallel views, Panoramas, VR Objects or Animations.

Light Pop-up Menu:

• Right clicking on the name of the light displays the contextual menu:



Activate/Turn off: the light

Duplicate: Creates a light identical to the current light.

Cut: The cut light is stored in the clipboard.


Copy: The copied light is stored in the clipboard.

Delete: Removes the selected lights.

Edit View Using This Light: Choose a viewpoint from the list. The chosen viewpoint is displayed in the preview window. The inspector switches to <u>Perspectives</u>, <u>Parallel views</u>, <u>Panoramas</u>, <u>VR Objects</u> or **Animations** mode accordingly.



Selection and multiple editing of lights:

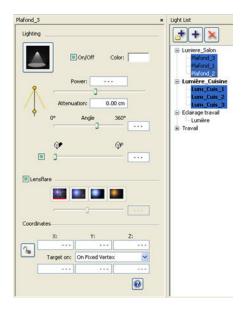

The Cut/Copy/Paste shortcuts are effective for the list.

To instantaneously assign a setting to several sources.

Select the sources by using:

Ctrl click for a discrete selection. Shift click for a continuous selection.

The multiple selection is represented by hatching icons as well as dots in the numerical fields.

When you change a parameter, it will be changed for all selected lights.


The Site Insertion Tool

In the <u>Perspectives inspector</u>, *Insertion* enables the user to position a camera precisely vis-a-vis a model or photo. Position a **background image** before using this command.

In this chapter you will learn about the following subjects:

Step 1 - Setting the Axis Markers in the 2D View.	. 155
Step 2 - Setting the Axis Markers in the Preview Window.	. 150
Step 3 - Running the Insertion Calculation.	. 15'

Opening the Insertion Command



- Click on
- The insertion dialog enables you to define the focal distance of the image, gives you the option of adjusting the
 axes, and allows you to choose the reference axis, display the model and run/stop the calculation.


NB: When opening the dialog, the model from the preview window is hidden. The background image remains, with a marker for the axes, which appear in red, green and blue.

Insertion is carried out in two steps: placement of a trihedron into the 2D view and into the Preview window.

Step 1 - Setting the Axis Markers in the 2D View


Setting the orthonormal marker on the geometry is performed in two steps in top view and in another view. If needed, in the top view, pivoting one of the red or green axes will rotate the marker on the origin.



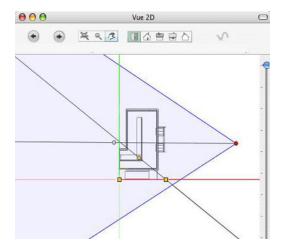


The changes made to the axes in 2D View are not updated in the Preview window. This is why we must also set the marker in this window. See step 2.

Step 2 - Setting the Axis Markers in the Preview Window

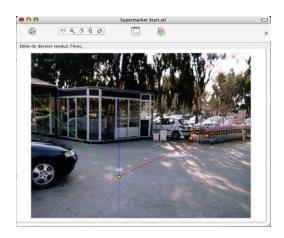

Place the origin of the axis marker on the photo, then pivot the red, green and blue axes one by one.



In the **insertion dialog**: Depending on the placement of the axes in preview, choose one of the following two viewing options:


The Y axis moves away from or towards the camera.

Determine the axis $\bigcirc x \bigcirc y \bigcirc z$ that will serve as a reference for sizing the 3D model in relation to the back-


ground image. Then, in the Preview window, adjust the size to the model by moving the yellow handle the same in 2D View.


In the <u>Preview Window</u>: The magnifying glass helps you place the axis marker precisely on the background image. To activate the magnifying glass, turn the mouse wheel. Each incrementation increases the zoom from x2 up to a maximum of x8.



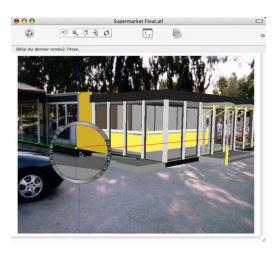

Step 3 - Running the Insertion Calculation

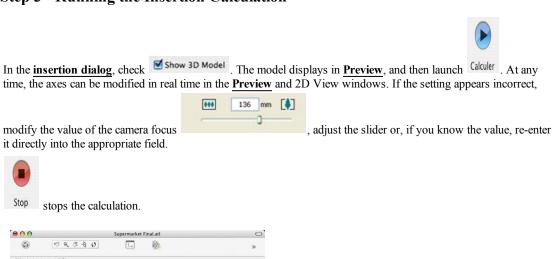

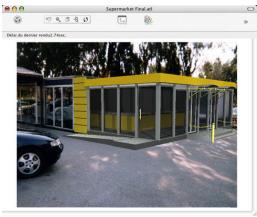

NB: In order to avoid any inadvertent modification, when the insertion dialog is closed, the view <u>locks</u> automatically.

To unlock it in the Perspectives inspector, open Coordinates, then click on the padlock $\stackrel{\triangle}{=}$.

To start again from the beginning, use the Cancel button.



Post-Process Effect Filters

Enables the user to apply effect filters to the current view:

- The effects are added to the view, as well as to the parameters set in the viewpoint inspectors.
- The Post-Process effects are "viewpoint dependent". Their settings do not affect other viewpoints.
- The check boxes activate/deactivate the effects.

In this chapter you will learn about the following subjects:

Tone Settings.	160
Examples: Post-Process Rendering	160



1. Image settings

Use the sliders or enter numeric values to set **Contrast**, **Brightness** and **Saturation**. Values from -100 to 100.

Clicking on the red diode cancels the effect.

The Mix Color box enables you to select a tint mix from the color picker, which will cover the entire image.

2. Exposure

Exposure: Determines the amount of light that enters the camera.

Size: Fluffs the effect to a greater or lesser extent.

Values from 0 to 100 for these two settings.

3. Grain:

Brightness: Gives the image a granular appearance.



Size: Determines the size of the grains.

Values from 0 to 100 for these two settings.

4. Edge and Pastel

Provides a photorealistic rendering mixed with crayon, or a completely crayoned rendering.

Edge intensity: Marks more or less the weight of the lines that determine the geometry contours.

Transparency: More or less masks the geometry while retaining the intensity of the contour and the pastel effect.

Pastel Effect: Provides a crayoned rendering effect.

Values from 0 to 100 for these three settings.

Validate or cancel these settings to close the dialog again.

5. Saved settings

Define as default/Default settings/Apply to all perspective viewpoints:

Respectively allow the user to revisit Artlantis initial settings, to define current settings as the default or propagate these settings to all other perspectives.




NB: Post-process effects are immediately visible in the Preview window.

When rendering, Artlantis always calculates in photorealistic rendering and applies the filters when the calculation is finished.



Examples: Post-Process Rendering

Tone Settings

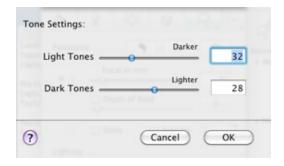

Enables the user to apply tone settings filters to the current view:

- **Light Tones**: Move the cursor to the right to darken the lighter tones.
- Dark Tones: Move the cursor to the right to lighten the darker tones.

Examples: Post-Process Rendering

The effects can combine together to provide an extremely rich variety.





Initial Photorealistic rendering



Desaturation



Contrast brightness and saturation



Edge and transparency



Contrast brightness and saturation



Edge and pastel



Edge transparency and pastel





Pastel



Exposure



Grain exposure edge and transparency



Transparency and pastel



Grain



Edge with no transparency

Rendering


In this chapter you will learn about the following subjects:

Perspective Rendering Parameters.	163
Expert Mode Viewpoint Rendering Parameters in the "Photorealistic" Engine	164
Render	167
Rendering Animations.	167
Panorama Rendering	168
Artlantis Batch Render.	171
The Batch Rendering Window	173
The Partial Rendering Window.	175
Panorama Rendering	176
Parallel View Rendering Settings.	
Panorama Rendering Parameters.	
VR Object Rendering Parameters.	183
Animation Rendering Parameters	

Perspective Rendering Parameters

Accessible by:

• Clicking on the icon available in the <u>Perspectives</u> inspector. The set values determine the rendering and display in the <u>Preview window</u>.

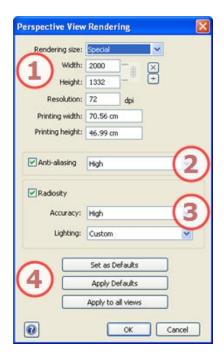

1. Display of rendering options for the "realistic photo" engine in the current mode Rendering size



Print Resolution for Perspective View¹

2. Anti-aliasing

Anti-aliasing: anti-aliasing Normal / High.



Tip: to save calculation time, select a low value while increasing the Width/Height of the rendering.

3. Radiosity

The calculation times depend on the value chosen.

This menu allows you to set the precision parameters with predefined values. I you change the values with the sliders or the text fields, the menu will be set to custom.

Precision: Normal / Average / High / Custom.

Lighting: Interior / Exterior / Custom.



NB: these settings have a very strong influence on the rendering time.



Tip: Calculate small-sized images or use the Batch Rendering command.

4. Application settings

Define as default / Default settings / Apply to all viewpoints for the selected inspector:

Respectively allow the user to define current settings as the default, to use the default settings or propagate these settings to all other views for the inspector concerned.




NB: the display of options in expert mode is activated in the Preferences.dialog.

Expert Mode Viewpoint Rendering Parameters in the "Photorealistic" Engine

Click on the icon available in the viewpoint and animation inspectors. The set values determine the rendering and display in the Preview window.



NB: The display of options in expert mode is activated in the Preferences dialog.

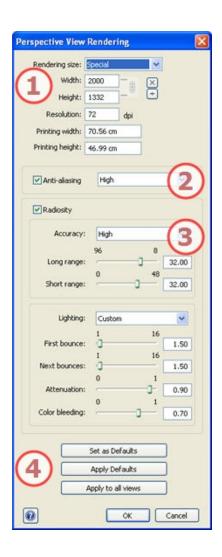

1. Display of options in standard mode

 $\label{eq:Rendering Size} \textbf{Print Resolution for Perspective View}^1$

2. Anti-aliasing

Anti-aliasing: Anti-aliasing Low/High



Tip: To save calculation time, select a low value while increasing the Width/Height of the rendering.

3. Radiosity

The calculation times depend on the value chosen.

This menu allows you to set the precision parameters with predefined values. If you change the values with the sliders or the text fields, the menu will be set to custom.

Precision: Normal/Average/High/Custom.



NB: These settings have a very strong influence on the rendering time.

1





Tip: Calculate small-sized images or use the Batch Rendering command.

Widened oversampling: Values from 96 to 8 pixels.

The radiosity is calculated over a small number of pixels, the others are extrapolated. This distance represents the mean distance in pixels between two points where radiosity is calculated. The lower the distance, the more the density of calculated pixels increases.



NB: These settings have a very strong influence on the rendering time.

Reduced oversampling: Values from 0 to 48 pixels.

This is the radiosity from near surfaces (e.g. the corner between 2 walls). This requires special processing enabling shadow quality to be refined. The value selected represents the processing range. If 0, no calculation is carried out. The larger the value, the better will be the calculation of shadows with regard to radiosity.



NB: These settings have a strong influence on the rendering time.

Lighting: Interior/Exterior/Custom.

These settings affect the general ambient lighting for the scene. They are used to precisely control how the scene is exhibited.

The predefined settings Interior/Exterior give default lighting settings depending on the space chosen.

The *Custom* setting is used when the user opens a file prior to version 3 of Artlantis or when the lighting values have been changed in expert mode.



NB: These parameters do not affect the calculation times.

Lighting power:

• First rebound: values from 1 to 16.

Controls the radiosity power of the first rebound (affects all surfaces receiving direct light from a heliodon or light sources).

• Next rebounds: values from 1 to 16.

Controls the radiosity power of all rebounds after the first. This affects surfaces receiving indirect light. Increasing the number of rebounds gives more light, particularly for interior scenes.

• Attenuation: values from 0 to 1.

Controls absorption of light after one or more surface rebounds. A low value increases the contrast of the scene thus allowing strong shadows to be cast in an interior scene lit by indirect lighting.



NB: this parameter has almost no effect on exterior scenes.

• *Color transfer*: values from 0 to 1.

Controls the transfer of colors between surfaces.

Reducing the value desaturates the colors.

4. Application settings

• Define as default/Default settings/Apply to all perspective viewpoints

Allow the user to define the current settings as the default settings, to use the default settings or propagate these settings to all other views for the inspector concerned.



Render

Inspector Menu > Render



Specify the name, destination of the file and format in the dialog box: JPEG*, BMP*, TGA, PICT, TIFF, Piranesi or Photoshop**.



NB: * Formats that use the alpha channel. ** Photoshop PSD multi-layer format.

- Clicking on Options... opens the Rendering Parameters dialog.
- Render Now: Opens the rendering window, then displays the rendering progress and the estimated and elapsed computation times. To stop the rendering click on the close box of the window.
- Render Later:
 Postpones the rendering of the current viewpoint, the document is automatically saved. Rendering will be done using Artlantis Batch Render.

NB: Batch rendering is managed later in the Inspector menu > Batch Rendering... It is processed by Artlantis Batch Render.


Rendering Animations

Inspector Menu > Render



Format:

• Specify the name, destination of the file and format in the dialog box: MOV, JPG or TGA



Compression Parameters:

• Choose a Codec and a compression quality.



Plan RVB
Intel Indeo Video 4.4
Sorenson Video 3
BMP
H.264
Cinepak
DV/DVCPRO - NTSC
DV - PAL
DVCPRO - PAL
H.261
H.263
Photo - JPEG
JPEG 2000
Animation JPEG A
Animation JPEG B
MILO MIEGES
PNG
Sans
Animation
Vido
Graphique
TGA
TIFF
Composant vido

Quality:

• Choose a compression rate:



For low compression, move the slide to the left. For high compression, move it to the right.

- Clicking on Options... opens the Rendering Parameters dialog.
- Render opens the rendering window
 Shows the progress and the estimated and elapsed time of calculation. Work on the project cannot continue at the same time as the renderings.
- Postponed rendering saves the document.
 Postpones the rendering of the current animation.

Stop Rendering in Progress.

Click on the "Close" box.


NB: Batch rendering is managed later in the Inspector menu > Batch Rendering... It is processed by Artlantis Batch Render.

Panorama Rendering

1- Rendering a Panorama:

Each rendered node is composed of six images saved in jpeg files. The file format of the panorama is html, to be played on a web browser.

Select a destination folder.




The rendered panorama:




Into the destination folder, a folder with the name of the panorama is created. Inside are two folders named **assets** and **player** and one html file with the name of the panorama.



The asset folder contains all jpeg square images of the panorama a promenade.xml file and a special folder.

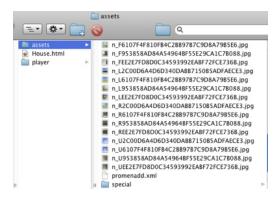


The **player** folder contains the files necessary to run the panorama animation with a web browser, among them the Flash **swf** file.

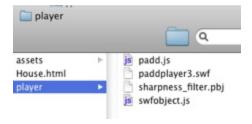

A double click on the html file launches the current web browser, the panorama is displayed in a navigation window.



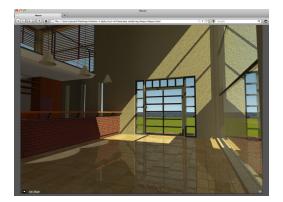

Click and drag the cursor into the window, the camera turns on itself at 360°.

To move from a node to an other one:

They are two ways to switch from one node to another: One is using the thumbnails list and one is using the sensitive triangles.

A- Using the thumbnail previews list:

Move the cursor into the lower part of the window a drawer displays the thumbnails of the panorama nodes.



Click on a thumbnail to switch to an other node.

B- Using the sensitive points displayed into the window

The sensitive points are the blue triangles followed by their names, a click on a triangle or its name to navigate to this node.



To display a full screen the panorama click on the icon in the lower right corner of the Web page.

2- Navigation option:

Another way to navigate into a 3D base is to overlap to the 3D View on the associated plan level, then to navigate from one node to an other one by a click on a triangle or its name, doing so it switches to the corresponding node and hides the plan level.

We just need to associate these plan levels with the already rendered panorama.

To do so:

Activate the parallel inspector then select the **Type of projection**: *Top*. In case of multiple levels create as many Top views as necessary.

⟨⟨⟩⟩

Very important: to keep the level hierarchy of the 3D base, the name of the points of views must be set on 2 digit numbers (space before between or after the digits are not allowed) Example: 00, then 01, 02... where 00 represents the basic level.

In 2D View, display an elevation view (Front, Right, Left or back). Set the point of view by moving the camera and the target. See " Working with Parallel Views in 2D View" page 34

The point of view will refer to the higher part of the plan shown into the navigator.

Render the levels and save them into the **special** folder located into the **asset** folder when we rendered the panorama (as explained **previously**)See "1- Rendering a Panorama:" page 168.

When launching the panorama a new button will get displayed into the left corner of the window.

A click on the icon displays the plan level centred into the window. Another click on the icon hides the current plan level.



When the plan level is displayed its name is showed at the top of the plan.

The sensitive nodes of the panorama are displayed on the plan. The current node is surrounded by a dynamic red circle. A click on a node will hide the plan and display the associated point of view in the navigation window.

To navigate from a plan level to an other use the arrows placed to the left or to the right of the plan.

Flash Player from Adobe company must be installed to perform the reading of the panorama.

http://www.adobe.com/support/flashplayer/downloads.html

Artlantis Batch Render

Artlantis Batch Render is an application independent of Artlantis. It launches the Artlantis **batch rendering** calculation. It is located into the installed Artlantis folder.


When launched, the render later manager displays the waiting renderings.

If in Artlantis no Render later documents have been saved, then the list is empty.

If Render later documents have been saved the documents are listed.

The render later list manager can be used to change settings on documents to render, thus editing the rendering settings without reopening the Batch Rendering window of Artlantis.



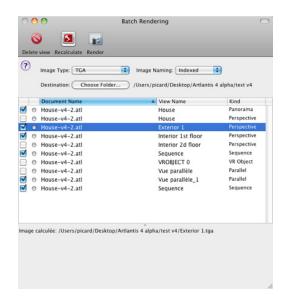

Toolbars

- Deletes the selected view
- Mark the selected view as needed to be calculated, even if it has already been rendered.
- Launches the rendering. The Rendering windows is opened.
- *Image type*: to redefine the rendering image format: JPEG, BMP, TGA, PICT, PNG, TIFF, Photoshop, Piranesi or HTML or movie formats.
- Indexed: names of renderings with the same name will be indexed numerically or
- Replaced: the name of a render with the same name will replace the existing file.



• Destination: the destination of the rendering file can be redefined by clicking on the Folder button.

The Document List:

- Check the box opposite the name of the image in the list. This image will be rendered later.
 - *Document name*: the name of the atl file
 - *View Name*: the name of the viewpoint
 - Kind: type of viewpoint; Perspective, Parallel, Panorama, Animation or VR object.

Diodes: color codes		
Diode	Status	Comments
Gray	Not rendered yet	Waiting for processing by $\underline{\textbf{Artlantis Batch Render}}$ if the box is checked.
Green	Rendered	
Orange	Error during rendering	Check the information at the bottom of the Batch Rendering window
Red	Not rendered due to one or more errors	Check the information at the bottom of the Batch Rendering window

₹

The window makes it possible to track the progress of the listed renderings. Each rendering displays a small progress image (1). A report (2) provides details on:

- The location of the document and the image calculated on the disk.
- The size of each image and the time it took to render.
- Potential problems with the location of textures, Shaders, etc.



Quit

• The *Quit* button closes the application, even if a calculation is in progress. The interrupted calculation information remains in the batch render document (*BatchRendererDocument.xml*). Relaunching Artlantis Batch Render will restart where it was stopped.

Pause

• Stops the image calculation in progress.

Resume

• Resumes the currently paused image calculation.


The Batch Rendering Window

All batch renders are processed by the "Artlantis Batch Render" application.

Inspector Menu > Batch Rendering.

The Artlantis rendering manager displays the list of items that are to be processed.



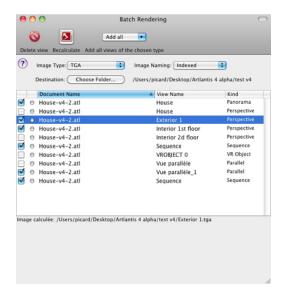

Toolbars

- Deletes the selected view
- Mark the selected view as needed to be calculated, even if it has already been rendered.
- of the current project to the list of views that need to be rendered.
- *Image type*: to redefine the rendering image format: JPEG, BMP, TGA, PICT, PNG, TIFF, Photoshop, Piranesi, html or movie formats.
- Indexed: names of renderings with the same name will be indexed numerically
 or
- Replaced: the name of a render with the same name will replace the existing file.




• Destination: the destination of the rendering file can be redefined by clicking on the Folder button.

Viewpoints List:

- Check the box opposite the name of the image in the list. This image will be rendered later.
 - *Document name*: the name of the atl file
 - View Name: the name of the viewpoint
 - Kind of view: type of viewpoint; Perspective, Parallel, Panorama, Animation or VR object.

Diodes: color codes		
Diode	Status	Comments
Gray	Not rendered yet	Waiting for processing by $\underline{\textbf{Artlantis Batch Render}}$ if the box is checked.
Green	Rendered	
Orange	Error during rendering	Check the information at the bottom of the Batch Rendering window
Red	Not rendered due to one or more errors	Check the information at the bottom of the Batch Rendering window



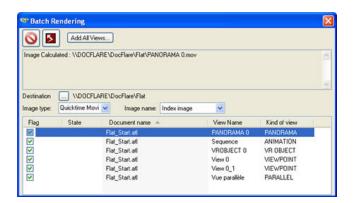

The Partial Rendering Window


Calculates part of the content of the Preview window.

Inspector Menu > Partial Render

1. Draw a rectangle in the **Preview Window**. The Render window showing the progress is displayed.



2. Defining the rectangle

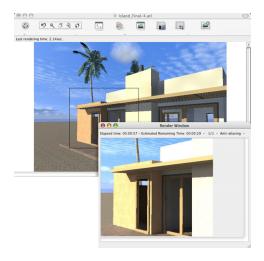

3. Render window showing the progress of the calculation.



Panorama Rendering

1- Rendering a Panorama:

Each rendered node is composed of six images saved in jpeg files. The file format of the panorama is html, to be played on a web browser.

Select a destination folder.



The rendered panorama:




Into the destination folder, a folder with the name of the panorama is created. Inside are two folders named **assets** and **player** and one html file with the name of the panorama.




The asset folder contains all jpeg square images of the panorama a promenade.xml file and a special folder.



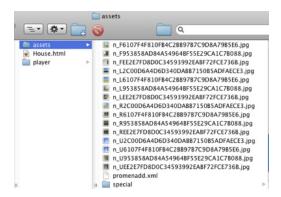

The **player** folder contains the files necessary to run the panorama animation with a web browser, among them the Flash **swf** file.

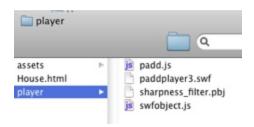

A double click on the html file launches the current web browser, the panorama is displayed in a navigation window.



Click and drag the cursor into the window, the camera turns on itself at 360°.

To move from a node to an other one:

They are two ways to switch from one node to another: One is using the thumbnails list and one is using the sensitive triangles.

A- Using the thumbnail previews list:

Move the cursor into the lower part of the window a drawer displays the thumbnails of the panorama nodes.



Click on a thumbnail to switch to an other node.

B- Using the sensitive points displayed into the window

The sensitive points are the blue triangles followed by their names, a click on a triangle or its name to navigate to this node.





To display a full screen the panorama click on the icon



in the lower right corner of the Web page.

2- Navigation option:

Another way to navigate into a 3D base is to overlap to the 3D View on the associated plan level, then to navigate from one node to an other one by a click on a triangle or its name, doing so it switches to the corresponding node and hides the plan level.

We just need to associate these plan levels with the already rendered panorama.

To do so:

Activate the parallel inspector then select the **Type of projection**: *Top*. In case of multiple levels create as many Top views as necessary.


Very important: to keep the level hierarchy of the 3D base, the name of the points of views must be set on 2 digit numbers (space before between or after the digits are not allowed) Example: 00, then 01, 02... where 00 represents the basic level.

In 2D View, display an elevation view (Front, Right, Left or back). Set the point of view by moving the camera and the target. See " Working with Parallel Views in 2D View" page 34

The point of view will refer to the higher part of the plan shown into the navigator.

Render the levels and save them into the **special** folder located into the **asset** folder when we rendered the panorama (as explained **previously**)See "1- Rendering a Panorama:" page 176.

When launching the panorama a new button will get displayed into the left corner of the window. A click on the icon displays the plan level centred into the window. Another click on the icon hides the current plan level.

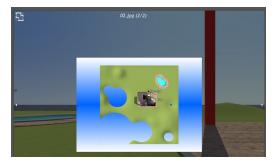

When the plan level is displayed its name is showed at the top of the plan.

The sensitive nodes of the panorama are displayed on the plan. The current node is surrounded by a dynamic red circle. A click on a node will hide the plan and display the associated point of view in the navigation window.

To navigate from a plan level to an other use the arrows placed to the left or to the right of the plan.




Flash Player from Adobe company must be installed to perform the reading of the panorama.

http://www.adobe.com/support/flashplayer/downloads.html

Parallel View Rendering Settings

Accessible by:

Clicking the icon available in the <u>Parallel Views</u> inspector. The set values determine the rendering and display in the <u>Preview window</u>.

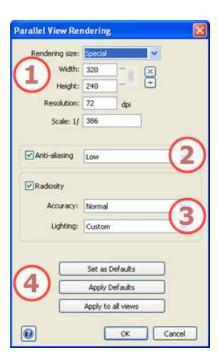

1. Display of rendering options for the "realistic photo" engine in the current mode

Same parameters as for rendering Perspectives, except for printing.

Rendering size

Print Resolution for Parallel View¹

2. Anti-aliasing

Anti-aliasing: anti-aliasing Normal / High.



Tip: to save calculation time, select a low value while increasing the Width/Height of the rendering.

3. Radiosity

The calculation times depend on the value chosen.

This menu allows you to set the precision parameters with predefined values. I you change the values with the sliders or the text fields, the menu will be set to custom.

Precision: Normal / Average / High / Custom.

1



Lighting: Interior / Exterior / Custom.



NB: these settings have a very strong influence on the rendering time.



Tip: Calculate small-sized images or use the Batch Rendering command.

4. Application settings

Define as default / Default settings / Apply to all viewpoints for the selected inspector:

Respectively allow the user to define current settings as the default, to use the default settings or propagate these settings to all other views for the inspector concerned.



NB: the display of options in expert mode is activated in the Preferences.dialog.


Panorama Rendering Parameters

Accessible by:

• Clicking on the icon available in the <u>Panorama</u> inspector. The set values determine the rendering and display in the <u>Preview window</u>.





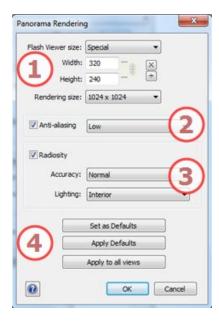

1. Display of rendering options for the "realistic photo" engine in the current mode

Flash Player size: Defines the size of the Flash player. Small 800 x 600, Normal 900 x 500 (iPad), Large 1280 x 720



- Select a size from the menu or
- Enter the Width and Height in pixels of the Flash Player.

The size represents the default display in the rendering window.




• Increase/decrease the values by two by clicking on the ; icons

Rendering size

The size in pixel of the calculated images. The rendering is always in a square format.

Select a size from the drop down menu: 640 x 640, 1024 x 1024, 1600 x 1600 or 2048 x 2048.



Recommended size:

- 640 quick check or small Web format.
- 1024 Web page usage and for iPad (1 or 2) and iPhone.
- 1600 local usage with Flash
- 2048 local usage with Flash or for iPad 2 in HD.

Choosing a higher value definition gives a better quality, especially when zooming in the navigator. But it will need a longer rendering time.



NB: The nodes of the panorama are composed of six square images.

2. Anti-aliasing

Anti-aliasing: anti-aliasing Normal / High.



Tip: to save calculation time, select a low value while increasing the Width/Height of the rendering.

3. Radiosity

The calculation times depend on the value chosen.

This menu allows you to set the precision parameters with predefined values. I you change the values with the sliders or the text fields, the menu will be set to custom.

Precision: Normal / Average / High / Custom.

Lighting: Interior / Exterior / Custom.



NB: these settings have a very strong influence on the rendering time.



Tip: Calculate small-sized images or use the Batch Rendering command.

4. Application settings

Define as default / Default settings / Apply to all viewpoints for the selected inspector:

Respectively allow the user to define current settings as the default, to use the default settings or propagate these settings to all other views for the inspector concerned.




NB: the display of options in **expert mode** is activated in the Preferences.dialog.



VR Object Rendering Parameters

Accessible by:

Clicking on the icon available in the <u>VR Object</u> inspector. The set values determine the rendering and display in the <u>Preview window</u>.

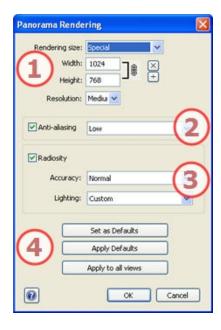

1. Display of rendering options for the "realistic photo" engine in the current mode

Rendering size

Number of images: Information on the number of images to be rendered to make up the VR objects depending on vertical and horizontal step.

2. Anti-aliasing

Anti-aliasing: anti-aliasing Normal / High.



Tip: to save calculation time, select a low value while increasing the Width/Height of the rendering.

3. Radiosity

The calculation times depend on the value chosen.

This menu allows you to set the precision parameters with predefined values. I you change the values with the sliders or the text fields, the menu will be set to custom.

Precision: Normal / Average / High / Custom.

Lighting: Interior / Exterior / Custom.



NB: these settings have a very strong influence on the rendering time.



Tip: Calculate small-sized images or use the Batch Rendering command.



4. Application settings

Define as default / Default settings / Apply to all viewpoints for the selected inspector:

Respectively allow the user to define current settings as the default, to use the default settings or propagate these settings to all other views for the inspector concerned.




NB: the display of options in expert mode is activated in the Preferences.dialog.

Animation Rendering Parameters

Accessible by:

Clicking on the icon available in the <u>Animations</u> inspector. The set values determine the rendering and display in the <u>Preview window</u>.

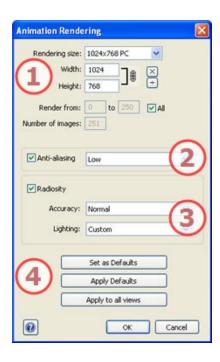

1. Display of rendering options for the "realistic photo" engine in the current mode

Film size

- Select a size from the menu or enter the width and height in pixels.
- Increase/decrease the values by two by clicking on the signs.

Render from X to Y Image. Enter the numbers of the corresponding images to calculate a portion of the sequence. First Frame is set to 0.

Number of images: Information on the number of images or selected frames to be rendered to make up the animation.

2. Anti-aliasing

Anti-aliasing: anti-aliasing Normal / High.



Tip: to save calculation time, select a low value while increasing the Width/Height of the rendering.



3. Radiosity

The calculation times depend on the value chosen.

This menu allows you to set the precision parameters with predefined values. I you change the values with the sliders or the text fields, the menu will be set to custom.

Precision: Normal / Average / High / Custom.

Lighting: Interior / Exterior / Custom.



NB: these settings have a very strong influence on the rendering time.



Tip: Calculate small-sized images or use the Batch Rendering command.

4. Application settings

Define as default / Default settings / Apply to all viewpoints for the selected inspector:

Respectively allow the user to define current settings as the default, to use the default settings or propagate these settings to all other views for the inspector concerned.



NB: the display of options in **expert mode** is activated in the Preferences.dialog.



The Panorama Inspector

In this chapter you will learn about the following subjects:

Panorama List: for handling panoramas on the list shown.



1. Panorama

Focal Length: Changes the focal length when the slider is used or a value is entered in mm or degrees (adjusts the angular opening of the camera).

Depth of Field: click then, in the Preview window, click to define the clear point of the scene, with the rest remaining blurred. The cursor adjusts the blur amount.

Clipping Box: for defining clipping planes.

Show: in 2D View

Activate: Representation in Preview mode

2. Lighting

To handle light schemes linked to the view, select them from the drop-down menus.

Heliodon: links a heliodon to the view. Selecting "None" deactivates the heliodon.

Light Group: Links one or more light groups to the view. Selecting "None" deactivates the light groups.

Neon Shaders: Links one or more Neon Shaders to the view. Selecting "None" deactivates the lighting.

3. Environment

Handles the background and foreground of the scene.

<u>Defining a Background</u>: Background type: 3D Sky, Gradient, 2D Image, 3D Image, 3D Cubic Foreground Images

4. Visible layers: check them in the drop-down menu.

5. Coordinates

Camera XYZ Position.

Clicking on locks them and clicking on unlocks them.



6. Tone settings

Set the Tone for the current view.

7. Post-production


Applies effects to the current viewpoint: The effects combine into, as well as with the parameters set in the inspector.

8. Rendering Parameters

Prepares the document for final rendering.

NB: Editing the <u>scene information</u> such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

Panorama List 🗂





- To edit, double-click on the name.
- duplicates the selected panorama and its first node
- duplicates the selected node or the first node if the panorama is selected (In 2D View the new node overlaps the duplicated node).
- deletes the selected item from the list.

Panorama Pop-up Menu

• Right-clicking on a view displays the pop-up menu:



Duplicate: use the original to create a new superimposed panorama or node.

Delete: the panorama or the node is removed from the list.

Add to: Perspectives List:
Add to: Parallel Views list:
Add to: VR Object List:



Add to: **Animation list**:

Depending on the option selected, adds current view from Panoramas to Perspectives, Parallel Views, VR Objects or Animations.

Edit Light: select a light, the inspector palette switches to Lights mode and the light is selected.

Edit Heliodon: The palette inspector switches to Heliodon mode and the heliodon is selected.

Make First Node: The selected node becomes the First Node, this is the first one displayed when playing the panorama. When the node is already the first node a disabled "*Is First Node*" item is displayed.

Create <u>links between nodes</u>



The VR Objects Inspector


Manages viewpoints defined by a camera, a target and a focal length. Each viewpoint is considered to be an independent document with its own parameters which can receive its own environment.

A VR Object view is made up of several images taken from different points in a sphere. A view is defined by a camera that moves in a sphere, a target, the center of the sphere and a focal length, as well as two horizontal and vertical angular movement steps.

In this chapter you will learn about the following subjects:

VR Object List 192

VR Object List: for managing VR objects on the list shown.

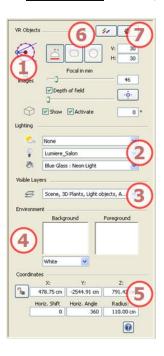

1. VR object Navigation

VR projection choice: Hemispherical, Torus, Spherical.

Modifying values in angular horizontal and vertical step degrees.

Number of images: Indicates the number of images that will be needed to calculate the VR objects. This number is dependent on the values defined for the angular horizontal, vertical steps and the <u>horizontal angle</u>. Focal Length: Changes the focal length when the slider is used or a value is entered in mm or degrees (adjusts the angular opening of the camera).

NB: An angular step of 10 degrees provides a good compromise between the number of views needed (size of the file) and fluidity (your objects will not be jerky).

Depth of Field: click then, in the Preview window, click to define the clear point of the scene, with the rest remaining blurred. The cursor adjusts the blur amount.

Clipping Box: for defining clipping planes.

Show: in 2D View

Activate: Preview Representation



2. Lighting:

To handle light schemes linked to the view, select them from the drop-down menus.

Heliodon: links a heliodon to the view. Selecting "None" deactivates the heliodon.

Light Group: Links one or more light groups to the view. Selecting "None" deactivates the light groups.

Neon Shaders: Links one or more Neon Shaders to the view. Selecting "None" deactivates the lighting.

3. Visible layers: check them in the drop-down menu.

4. Environment:


Handles the background and foreground of the scene.

Defining a Background type: 3D Sky, Gradient, 2D Image, 3D Image, 3D Cubic

Foreground Images

5. Coordinates:

XYZ Position of Center of VR



Horizontal Constraint: According to the trigonometric circle, turns the opening point of the VR object. Enter a value in degrees.

Horizontal Angle: For restricting the opening angle. Enter a value in degrees.

Radius: the radius of the VR.

6. Post-Production:

Applies effects to the current viewpoint. The effects combine into, as well as with the parameters set in the inspector.

7. Rendering Parameters:

Prepares the document for final rendering.

NB: Editing the <u>scene information</u> such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

VR Object List 🗂



opens the viewpoint list. Each is displayed by name and preview thumbnail.



• Double click on a name to edit it.





VR Object Pop-up Menu

• Right clicking on a view displays the pop-up menu:



Duplicate: Uses the original to create a new superimposed viewpoint.

Delete: The viewpoint is removed from the list.

Add to: Perspectives list
Add to: Parallel Views List
Add to: Panoramas List
Add to: Animations list

Depending on option selected, adds current view from Perspectives to Parallel Views, Panoramas, or Animations.

Edit Light: Choose a light. The inspector palette switches to <u>**Lights**</u> mode, and the light is selected. *Edit Heliodon*: The palette inspector switches to <u>**Heliodon**</u> mode and the heliodon is selected.



The Animations Inspector

Animations: General Information


A Sequence is defined by a camera: A viewpoint, an aim point and a focus distance.

Each sequence is considered as an individual document with its own parameters.

In this chapter you will learn about the following subjects:

General Animation Information	190
Sequence.	196
Real Time Display:	
Elements that can be animated.	
Animations List	
Animation Coordinates.	
Animatable Camera Parameters.	199
What can be animated.	199
What cannot be animated.	
Animatable Heliodon Parameters.	200
What can be animated.	200
What cannot be animated.	
Animatable Light Parameters.	
What can be animated.	
What cannot be animated.	
Animatable Object Parameters.	
What can be animated.	
What cannot be animated	

Animations List: for managing animations on the list shown.

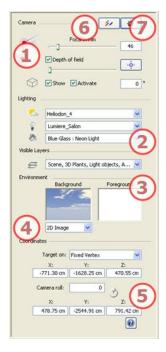



1. Animations

Depth of Field: click then, in the Preview window, click to define the clear point of the scene, with the rest remaining blurred. The cursor adjusts the blur amount.

Clipping Box: for defining clipping planes.

- *Show*: in 2D View
- Activate: Preview Representation

2. Lighting

To handle light schemes linked to the view, select them from the drop-down menus.

Heliodon: links a heliodon to the view. Selecting "None" deactivates the heliodon.

Light Group: links one or more light groups to the view. Selecting "None" deactivates the light groups.

Neon Shaders: Links one or more Neon Shaders to the view. Selecting "None" deactivates the lighting.

- 3. Visible layers: check them in the drop-down menu.
- 4. Environment:

Handles the background and foreground of the scene.

Defining a Background: Background type: 3D Sky, Gradient, 2D Image, 3D Image, 3D Cubic.

Background type: Foreground Images

- 5. Coordinates:
- **6. Post-Production:** Applies effects to the current viewpoint: The effects combine into, as well as with the parameters set in the inspector.
- 7. Rendering Parameters: Prepares the document for final rendering.

NB: Editing the scene information such as the infinite ground, movement of the origin, redimensioning of the model and the coordinates may be accessed via the Window menu.

See "Working with Camera Animation in 2D View" page 52

See "Working with Light Animation in 2D View" page 60

See "Working with Object Animations in 2D View" page 66

See "The Timeline Window" page 77

See "General Preview Display Shortcuts" page 215

General Animation Information



Animation makes it possible to produce and play a scene made up of one or more sequences.

Sequence

A sequence retraces the camera path in time.



NB: The camera may also be a fixed plane in which object lights, or a heliodon are animated.

The camera path is processed in:

- The Animations Inspector, (animating parameters, focal distance, association to lighting groups, depth of field, roll, etc.).
- The **Timeline window**, (time management).
- The Preview Window (managing camera targets).
- The **2D View**. (Managing paths: cameras, lights, objects).

Animating in a sequence of parameters for other inspectors:

Parameters respectively accessible from:



- <u>Lights Inspector</u>*: Illumination configurations
- · Heliodons Inspector*: Heliodon configuration
- Objects Inspector*. Object configurations
- 2D View: Creating and editing paths for moving cameras, lights and objects.
- <u>Timeline Window</u>: Creating and editing keyframes (changing parameter of an element at a T instant, interpolation of parameter changes between two keyframes), synchronizing keyframes of elements that either belong or do not belong to the same inspector.

* NB: To animate the parameters for **light**, **heliodon** and **object** inspectors, they must first be displayed in the Animation Inspector before being displayed in the relevant inspector, i.e. light, heliodon, object.

Real Time Display:

• Preview Window: Shows and plays in real time the result of adjustments.

Elements that can be animated

All elements can be animated except for those related to the Shader inspector, or which are listed as not being able to be animated in:

- Animatable Camera ParametersSee "Animatable Camera Parameters" page 199
- Animatable Heliodon Parameters See "Animatable Heliodon Parameters" page 200
- Animatable Light Parameters See "Animatable Light Parameters" page 201
- Animatable Object Parameters See "Animatable Object Parameters" page 201

Animations List =

opens the sequence list. Each is displayed by name and preview thumbnail.



- To edit, double-click on the name.
- adds a sequence, deletes it



Animation Pop-up Menu

• Right clicking on a view displays the pop-up menu:



Duplicate: Starting with the current sequence, a sequence is created that takes up the position of the camera but not the existing path.

Duplicate View and Path: Starting with the current sequence, a sequence is created that takes up the position of the camera, the existing path and key frames.

NB: Only the camera path is duplicated; the paths of objects and lamps are excepted.

Delete: The current sequence is removed from the list.

Add to: Perspectives list

Add to: Parallel Views List:

Add to: Panoramas List

Add to: VRObject List

Depending on option selected, adds current view from Perspectives to Parallel Views, Panoramas, or VR Objects.

Edit Heliodon: The palette inspector switches to Heliodon mode and the heliodon is selected.

Edit Light: select a light, the inspector palette switches to Lights mode and the light is selected.

Animation Coordinates

From the viewpoint (Position) and Target of the camera.



The Camera Position defines:


- Viewpoint position: Provides the x, y, z coordinates. Entering new values redefines the position.
- Target Position 2 options:

On a fixed vertex: The camera moves on its path aiming at a fixed vertex in the scene. The fixed vertex is defined in the **Preview window** or **in 2D View**.



Orientation on path: The camera moves tangentially to the path. Horizontal and vertical angles can be defined relative to this tangent. The Distance provides the distance between the camera and the aim point.

Target on: choose between target on a fixed vertex or on an object defined as target.



NB: Using the Timeline, in a single sequence, the camera can change behaviour several times.

Animatable Camera Parameters 🗂



What can be animated

From the Cameras Inspector	Editing in
Camera coordinates	Animations Inspector - Coordinates tab - 2D View
Target coordinates	Animations Inspector - Coordinates tab - 2D View
H target angle relative to the tangent to the path	Animations Inspector - Coordinates tab
V target angle relative to the tangent to the path	Animations Inspector - Coordinates tab
Activated and/or displayed clipping box Modification box	Animations Inspector - Coordinates tab - 2D View
Focus	Animations Inspector - Coordinates tab - 2D View
Colored background	Animations Inspector
Depth of Field	Animations Inspector
Atmosphere	Animations Inspector
Roll	Animations Inspector

Settings are available in the **Animations Inspector**. See "The Animations Inspector" page 195



What cannot be animated

Cameras
Ambient
Changing a heliodon
Changing light groups
Background and foreground images
Changing the Photorealistic/Hatch ren- dering engine

Animatable Heliodon Parameters 🗂



What can be animated

From the Heliodons Inspector	Editing in
Time	Heliodons Inspector
Date	Heliodons Inspector
Power of the Sun	Heliodons Inspector
Celestial illumination	Heliodons Inspector
Celestial color	Heliodons Inspector
Color	Heliodon inspector
Lens flare	Heliodons Inspector
Halo type	Heliodons Inspector
Lens flare power	Heliodons Inspector

Parameters are available in the **Heliodons Inspector**. See "The Heliodons Inspector" page 145

What cannot be animated

Heliodons
Cities
Shadows ON/OFF
Shadow type
Contribution to radiosity
Colored sun On/Off
Orientation of North

₩

Animatable Light Parameters 🖱

What can be animated

From the Lights Inspector	Editing in
Status ON/OFF	Lights Inspector
Illumination type (omni, spot, direct.)	Lights Inspector
Power	Lights Inspector
Associating a halo	Lights Inspector
Changing halo	Lights Inspector
Shadows ON/OFF	Lights Inspector
Soft shadows	Lights Inspector
Shadow power	Lights Inspector
Source coordinates	Lights Inspector - Coordinates tab - 2D View
Target coordinates	Lights Inspector - Coordinates tab - 2D View
Spot Opening Angle	Lights Inspector - Coordinates tab - 2D View
Fall-off	Lights Inspector - Coordinates tab - 2D View
Soft shadows bias	Lights Inspector - Coordinates tab - 2D View
Distance A	Lights Inspector - Coordinates tab - 2D View

Parameters are available in the $\underline{\textbf{Light Inspector}}$. See "The Lights Inspector" page 151

What cannot be animated



Animatable Object Parameters =

What can be animated

From the Objects Inspector	Editing in
Coordinates	Objects Inspector - Coordinates tab
Rotation	Objects Inspector
Dimensions	Objects Inspector



- For 3D vegetation: Plant sizes, colors, date, etc.
- For Billboards: Size, luminosity, brightness, etc.

Parameters are available in the **Objects Inspector**. See "The Objects Inspector" page 125

What cannot be animated

Objects
Scene coordinates
Scene rotation
Scene dimensions

Preferences

Artlantis settings enable you to organize your working environment.


In this chapter you will learn about the following subjects:

Preference Settings. 203


Preference Settings

Artlantis settings enable you to organize your working environment.

Access: Edit Menu > Preferences

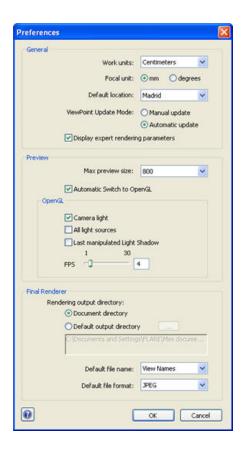

General



- Work units: In the drop-down menu choose (mm, m, cm, inches, feet and inches).
- Focal unit: select mm or degrees for the viewpoint inspector focus.



- *Default location*: In the pop-up menu. The change becomes effective the next time a DWG, DWF, DXF, OBJ and 3DS file that does not contain any location-related information is opened.
- Manual update mode: concerns the method of updating the positions of the camera, the viewpoint, the roll and focal length.

In manual update mode, in the viewpoint list, the thumbnails will be updated when the use clicks the "*Update*" button, or when a new view is activated.

The thumbnails in the list will not be updated when Shaders, lights or backgrounds are modified.

Display Expert Rendering Parameters: when checked, in the viewpoint rendering parameters window, this enables refinements to be made using the Expert Viewpoint Rendering parameters.

Preview



- Maximum Preview size:
 - Choose the maximum size of the window contents (using the shortcut *Control* +). In the pop-up menu (640, 800, 1024, 1200), the value means the size of the preview image displayed in that window.
- Automatic permutation in OpenGL mode: when this box is checked, the display mode switches from photorealistic to OpenGL mode when the camera is moved. Allows the display on small hardware configurations to be accelerated.



NB: The refresh time of the window is proportional to the size of the display.

• OpenGL Options

The following options affect the Preview window rendering display in OpenGL mode.

• Camera light:

when this option is checked, it simulates the white omni-directional light emitted from the camera. The scene is always lit.



NB: This option is independent of the anti-aliasing of the final rendering.

• All light sources:

When this option is checked, OpenGL takes into account all active light sources: lights and sun



NB: The refresh time of Preview slows down when the option is activated.

Last manipulated Light Shadow:

When this option is checkec, OpenGL takes into account shadows cast from the last light or sun manipulated.



NB: The refresh time of Preview slows down when the option is activated.

FPS:



Increases or reduces OpenGL navigation fluidity. The greater the number, the better the fluidity. On the other hand, a low figure gives better image definition.

Move the slider or enter a value of between 1 and 30 images per second.

Final Renderer

• Rendering output folder:

Two choices for the default rendering output folder:

- Document directory: The renderings are saved at the same level as the current file.
- Default output directory: Click on the button to choose the folder.



Default file name: either the name of the viewpoint, or the name of the document plus the name of the viewpoint.

Default file format: in the drop-down menu, choose: JPEG, BMP, TARGA, PICT, TIFF, Photoshop or Piranesi.



Mouse and Keyboard Shortcuts

Available in 2D View and Preview.

In this chapter you will learn about the following subjects:

General 2D Shortcuts.	208
2D Shortcuts - Working with Perspectives.	
2D Shortcuts - Working with Parallel Views.	
2D Shortcuts - Working with the Clipping Box	
2D Shortcuts - Working with Objects.	
2D Shortcuts - Working with Lights.	212
2D Shortcuts - Working with Heliodons.	
2D Shortcuts - Working with Panoramas.	
2D Shortcuts - Working with VR Objects.	
2D Shortcuts - Working with Animations.	
General Preview Display Shortcuts.	
Activated Object Inspector Preview Shortcuts.	
General Preview Shortcuts	
Perspective Inspector Preview Shortcuts - Site Insertion.	
Activated Heliodon Inspector Preview Shortcuts.	218
Activated Shaders Inspector Preview Shortcuts	220



General 2D Shortcuts

Actions	Combination and Key Strokes		
Enlarge the display.	Ctrl +		
Reduce the display.	Ctrl & -		
Fit to Window.	Ctrl =		
Camera pan movement.	Ctrl & / or		
Enlarge a part of the window by drawing a rectangle with two opposing angles	Ctrl *		
+ or - Dynamic Zoom depending on the target.			
Change 2D View.	Depending on the view, press the of the keys on the keyboard: 1 (Above), 2 (Front), 3 (Right), 4 (Left), 5 (Rear)		
Previous view.	<		
Next View.	企 >		
Activate the Pop-up menu.			
Force a movement on a 45° incremental scale.			

2D Shortcuts - Working with Perspectives

Actions	Combination and Key Strokes
	Inspectors: Shaders, Lights, Heliodons, Objects and Perspectives.
Graphically move the camera, the target or the bisector.	
Graphically modify the focal distance.	
Duplicate a Viewpoint.	Alt &

2D Shortcuts - Working with Parallel Views

Actions	Combination and Key Strokes		
	Inspectors: Shaders, Lights, Heliodons, Objects, and Parallel Views.		
Graphically move the camera, the target or the bisector.			
Graphically modify the section width.			
Duplicate a Viewpoint.	Alt &		

2D Shortcuts - Working with the Clipping Box


In order to use the Clipping Box tool, the "Show" option must be checked in the Perspectives inspector.




The command takes effect with all inspectors




Actions:

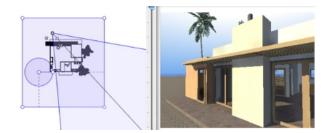


Clipping box displayed.

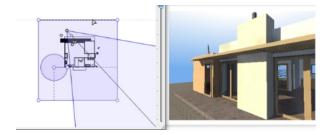


• Blue contour line entry.

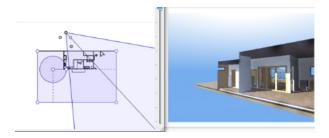

• When the contour line moves, the cutting plane operates in Preview mode.

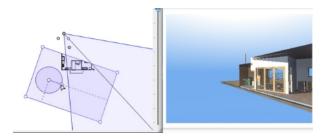


• To create an angle to the clipping box, grab the handle on the circular cursor and turn it.

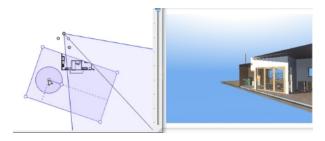

₩

• Move the origin of the circular cursor by clicking and dragging from the center.

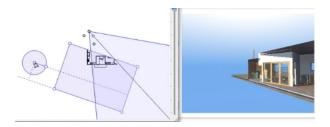

The recall lines coming from the center help with positioning.

2D Shortcuts - Working with Objects

Actions	
	You can only manipulate objects in the Objects mode.
Move an object.	
Duplicate an object.	Alt &
Duplicate an object several times.	Alt
Redefine the anchor point of an object	D &



2D Shortcuts - Working with Lights


Actions	Combination and Key Strokes
	Inspectors: Shaders, Lights, Perspectives, Parallel views, Panoramas, VR Objects, Animations.
Graphically move the source, the target and the bisector, modify the light cone and the lighting distances.	
Duplicate a light.	Alt &
Duplicate a light several times.	Alt 11 & & & & & & & & & & & & & & & & & &

2D Shortcuts - Working with Heliodons

Depending on the operation chosen in the Heliodons inspector, there are three options available: Location, Manual and 45° .




Location option:

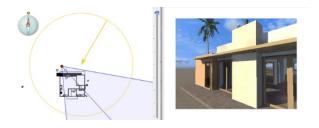


• Defines the direction North by moving the yellow point around the compass.






• Result: Shadows are recalculated.

Manual Sun Position option

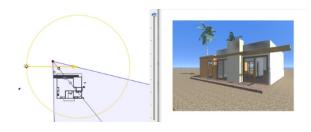

• Graphically moves the sun icon around the yellow circle.

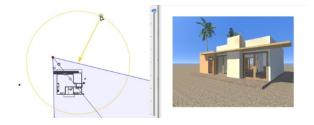


• Result: Shadows are recalculated.

There is an option for shadows to be projected at 45° depending on the position of the viewpoint.



• The angle between the viewpoint bisecting line and the position of the sun always remains at 45°.

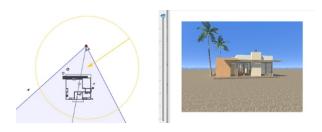

• Result: Even after the camera is graphically moved, the shadows remain at 45° to the camera.



2D Shortcuts - Working with Panoramas

Actions	Combination and Key Strokes
	Inspectors: Shaders, Lights, Heliodons, Objects and Panoramas
Graphically move the camera, the target or the bisector.	
Graphically modify the focus (Perspectives, VR Objects, Animations)	
Graphically modify the view width (Panoramas)	
Duplicate a Viewpoint.	Alt &

2D Shortcuts - Working with VR Objects

Actions	Combination and Key Strokes		
	Inspectors: Shaders, Lights, Heliodons, Objects and VR Objects		
Graphically move the camera, the target or the bisector.			
Graphically modify the focus (Perspectives, VR Objects, Animations)			
Graphically modify the view width (Panoramas).			
Duplicate a Viewpoint.	Alt &		

2D Shortcuts - Working with Animations

Actions	Combination and Key Strokes		
	Inspectors: Shaders, Lights, Heliodons, Objects and Animations		
Path edit mode: For graphically moving the camera, viewpoint, bisecting line, path, or a control point.			
Time edit mode:			
For moving a keyframe.			
Graphically modify the focal distance.			
Extend a path.	Alt & To the path's final control point		

General Preview Display Shortcuts

Actions	Combination and Key Strokes		
Enlarge the content of the Preview window.			
NB: the camera does not move.	+		
Reduce the content of the Preview window.			
NB: the camera does not move.			
Fit to Window.	=		




Activated Object Inspector Preview Shortcuts

Actions	Combination and Key Strokes
Select and/or move the object.	
Duplicate the object.	Alt &
Replace the object with a different one using a drag & drop from the Catalog or Desktop.	Ctrl &
Move with no change of the hierarchy.	Ctrl &

General Preview Shortcuts

Actions	Combination and Key Strokes			
	Parallel Views and Perspectives Mode.	Panoramas Mode.	VR Objects Mode.	Animations Mode
Turn the camera around the clicked point		N/A	N/A	
	Alt &			&
Turn the camera around its target Turn the camera on itself.		N/A	N/A	
The + or - Dynamic Zoom is focused on the position of the cursor.	***	N/A	N/A	#
Change the focus distance.	N/A	#	#	N/A
				•
Camera pan movement.	•	N/A	N/A	NB: For a camera with no path.
Pan To: Place a viewpoint perpendicular to a surface.	× & Click	N/A	N/A	X & Click
Many the converse through the				W & Click
Move the camera through the scene. When the cursor is pointed towards the top of the window, the camera moves forwards in the scene; when it is pointed towards the bottom, it moves laterally, towards one of the sides.	W &	N/A	N/A	NB: For a cam- era with no path.





Example:

In the Shaders mode with a Perspectives display, you must use the following shortcut to turn the camera around its



Perspective Inspector Preview Shortcuts - Site Insertion

Actions	Combination and Key Strokes
Move the origin of the trihedron, pivot the axes or slide the yellow cursor to the defined reference axis.	
Move the origin of the axes while maintaining the directions.	Alt &
Show/Hide the magnifying glass. Each incrementation increases the content of the magnifying glass from x2 to x8.	

Activated Heliodon Inspector Preview Shortcuts

Actions	Combination and Key Strokes
Manually move the sun.	
NB: Only available when the Manual option is selected in the Heliodon inspector.	
CLocation Manual 045°	
Define fog start (advanced heliodon settings).	
▼ Fog	
Click on the target icon and then click on an element in Preview.	

₩

Example of manually moving the sun:



Preview: Manually moving the sun.



Result after movement.



NB: If there is no sun in the current view, you can display it by modifying its position in the 2D View.

Example of positioning the start of fog:



Click on the airplane in the foreground to define the fog start.





Click on the airplane in the background to redefine the fog start.

Activated Shaders Inspector Preview Shortcuts

Actions	Combination and Key Strokes
Select a Material or a Shader.	
NB: The material is highlighted	
Select a material or a Shader located behind a transparent surface.	T &
Select a material or a Shader by reflection in another material.	
NB: if the Shininess slider is at maximum.	R &
Duplicate a Shader or texture.	Alt &